


Interactive IR Whiteboards

QWB300 & QWB800 series



HARDWARE FEATURES

- Supports Multi-Users
- Dry-Erasable Surface
- Infrared (IR) Technology
- Hot Key Shortcuts

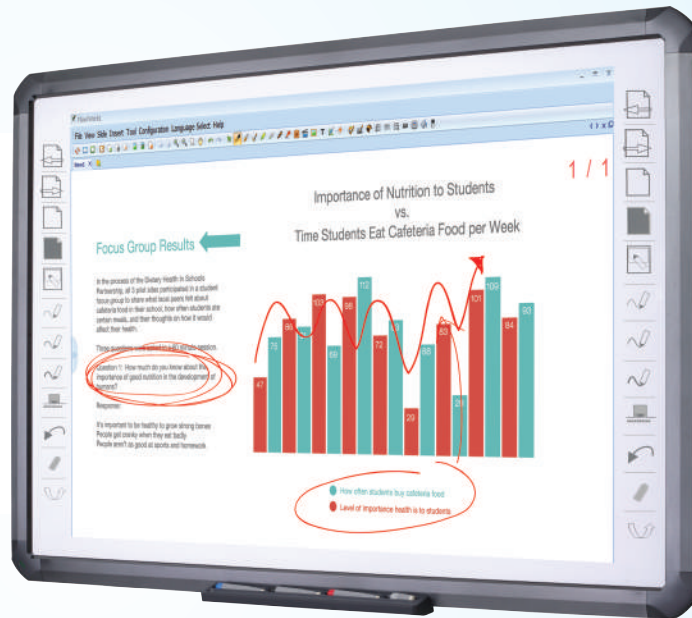

QWB800 Series



QWB300 Series


SOFTWARE FEATURES

- Included *Flow!Works* Annotation Software
- Integrates with Document Cameras, QClick SRS & Tablets
- Wireless Interactivity Available
- Export lessons to share online

Interactive IR Whiteboards QWB300 & QWB800 Series

Series	QWB300 Series		QWB800 Series		
Model Name	QWB379	QWB388	QWB882	QWB888	QWB898
Technology	IR	IR	IR	IR	IR
Active Area Size	79" (1641 x 1148mm)	88" (1928 x 1130mm)	82" (1716 x 1175mm)	88" (1814.5 x 1301.5mm)	98" (2198 x 1144mm)
Projection Size	74.7" (1518 x 1138mm)	84" (1808 x 1130mm)	77" (1567 x 1175mm)	85.5" (1735 x 1301mm)	93" (2053 x 1155mm)
Board Size	82"	92"	90"	96"	106"
Aspect Ratio	4:3	16:10	4:3	4:3	16:9
Hot keys	Two sides	Two sides	Two sides	One Side (Left Side)	Two Sides
Surface Type	Painted Steel	Painted Steel	Porcelain Steel	Porcelain Steel	Porcelain Steel
Frame Type	Alloy Frame	Alloy Frame	Alloy Frame	Alloy Frame	Alloy Frame
Multi-Touch	4 points	4 points	6 points	4 points	6 points
Writing Tools	Finger or Pen	Finger or Pen	Finger or Pen	Finger or Pen	Finger or Pen
Intelligent Pen Tray	No	No	Yes	Yes	Yes
Resolution	32767 x 32767	32767 x 32767	32767 x 32767	32767 x 32767	32767 x 32767
Scan Rate	125 dot/Second	125 dot/Second	125 dot/second	125 dot/second	125 dot/second
Accuracy	1mm	1mm	1mm	1mm	1mm
Interface	USB (A-B)	USB (A-B)	USB (A-B)	USB (A-B)	USB (A-B)
Support Wireless Function	Available	Available	Available	Available	Available
Power Consumption (W)	< 0.5W	< 0.5W	< 0.5W	< 0.5W	< 0.5W
Driver Support OS	Win 7 / 8 32bit or 64bit	Win 7 / 8 32bit or 64bit	Win 7 / 8 32bit or 64bit	Win XP / Vista / 7 / 8 32bit or 64bit	Win 7 / 8 32bit or 64bit
Mac & Linux	Driver available upon request	Driver available upon request	Driver available upon request	Driver available upon request	Driver available upon request
Operation Temperature	5-122°F (-15-50°C)	5-122°F (-15-50°C)	5-122°F (-15-50°C)	5-122°F (-15-50°C)	5-122°F (-15-50°C)
Operation Humidity	20~90%	20~90%	20~90%	20~90%	20~90%
Storage Temperature	-40-122°F (-40-50°C)	-40-122°F (-40-50°C)	-40-122°F (-40-50°C)	-40-122°F (-40-50°C)	-40-122°F (-40-50°C)
Storage Humidity	10~95%	10~95%	10~95%	10~95%	10~95%
L x W x H	67 x 48 x 2" (1710 x 1217 x 44.5mm)	79 x 48 x 2" (2000 x 1217 x 44.5mm)	73 x 52 x 1.5" (1852 x 1311 x 38mm)	77 x 58 x 1.5" (1952 x 1477.8 x 38mm)	92 x 52 x 1.5" (2334 x 1311 x 38mm)
Package Size	71.6 x 52 x 4 (1820 x 1330 x 100mm)	83 x 52 x 4" (2110 x 1330 x 100mm)	84 x 56 x 4" (2137 x 1417 x 100mm)	88 x 61.5 x 4" (2230 x 1560 x 100mm)	102 x 56 x 4" (2585 x 1420 x 100mm)
Net Weight	35 lbs (16 kg)	40 lbs (18 kg)	51 lbs (23 kg)	60 lbs (27 kg)	68 lbs (31 kg)
Gross Weight	64 lbs (29 kg)	68 lbs (31 kg)	68 lbs (31 kg)	82 lbs (37 kg)	95 lbs (43 kg)

- * Design & Specifications subject to change without notice
- * Recommended short throw projector to reduce hot spot on porcelain steel surface
- * Mac & Linux for select OS versions

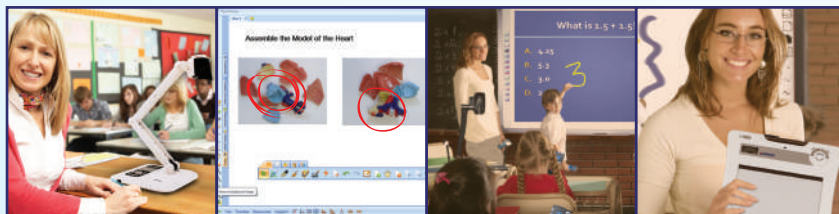

Annotate over Doc Cam & Web Cam Projection

Connect QClick SRS or Tablet for Interactive Quizzes!

