


FPL SPECTRUM ANALYZER

Specifications

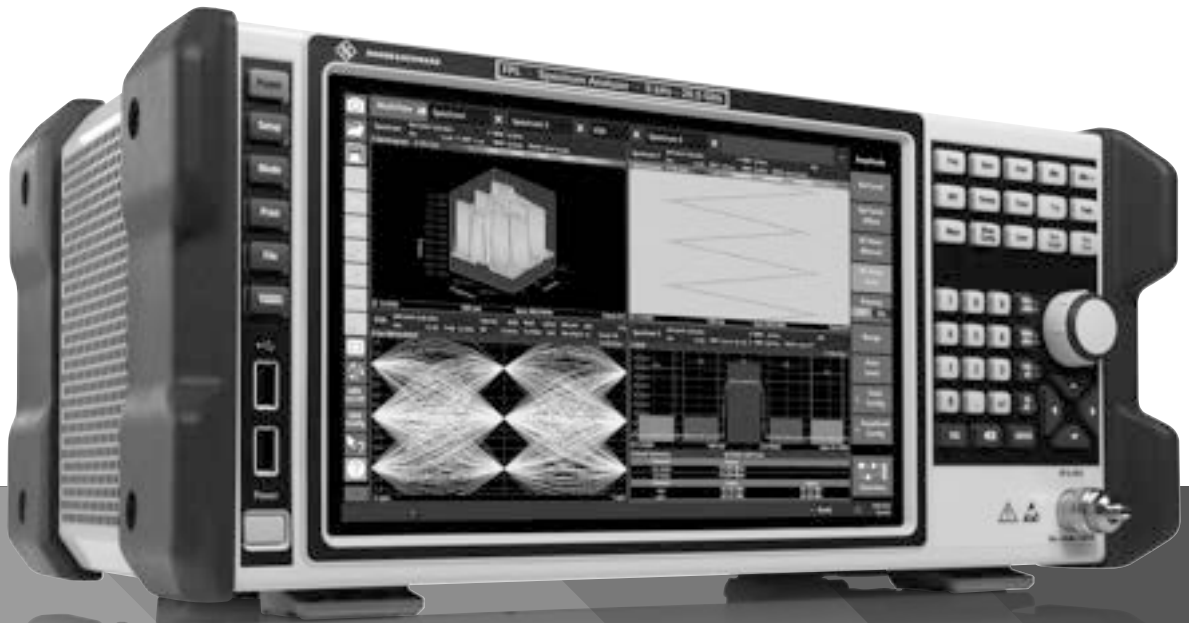

Specifications
Version 17.00

ROHDE & SCHWARZ

Make ideas real



CONTENTS

Definitions	3
Specifications.....	4
Frequency	4
Sweep time.....	5
Resolution bandwidths.....	5
Signal analysis bandwidth.....	6
Level measurement uncertainty and range	6
Intermodulation, sensitivity and spurious response	8
Measurement speed	10
Trigger functions.....	10
I/Q data	10
Inputs and outputs	11
General data.....	12
Options	14
R&S®FPL1-B5 additional interfaces	14
R&S®FPL1-B9 internal generator	15
R&S®FPL1-B10 GPIB interface	17
R&S®FPL1-B30 DC power input 12 V/24 V.....	17
R&S®FPL1-B31 internal lithium-ion battery	17
R&S®FSV-B34 charger (only needed for charging spare batteries).....	18
Ordering information	19
Options.....	19
Upgrades.....	20
Recommended extras.....	21
Power sensors supported by the R&S®FPL1-K9 option	22
Warranty and service.....	23

Definitions


General

Product data applies under the following conditions:

- Three hours of storage at ambient temperature followed by 30 minutes of warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, $\leq$, $>$, $\geq$, $\pm$, or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

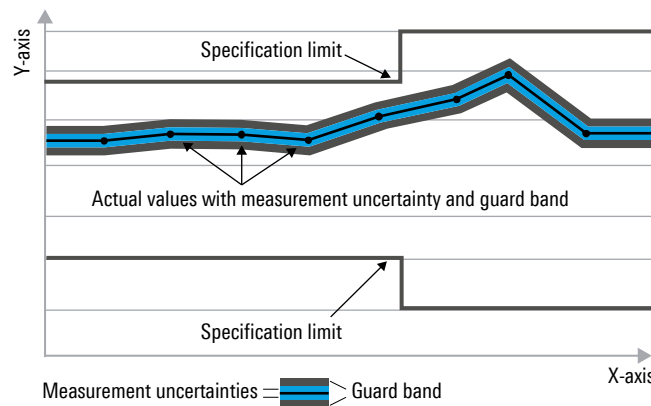

Non-traceable specifications with limits (n. trc.)

Represent product performance that is specified and tested as described under “Specifications with limits” above. However, product performance in this case cannot be warranted due to the lack of measuring equipment traceable to national metrology standards. In this case, measurements are referenced to standards used in the Rohde & Schwarz laboratories.

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format “parameter: value”.

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in billion bit per second (Gbps), million bit per second (Mbps), thousand bit per second (kbps), million symbols per second (Msps) or thousand symbols per second (ksps), and sample rates are specified in million samples per second (Msample/s). Gbps, Mcps, Mbps, Msps, kbps, ksps and Msample/s are not SI units.

Specifications

Frequency


Frequency range	R&S®FPL1003	
	AC coupled	5 kHz to 3 GHz
	R&S®FPL1007	
	AC coupled	5 kHz to 7.5 GHz
	R&S®FPL1014	
	AC coupled	5 kHz to 14 GHz
	R&S®FPL1026	
	AC coupled	5 kHz to 26.5 GHz
	R&S®FPL1044	
	DC coupled	10 Hz to 44 GHz
	AC coupled	5 kHz to 44 GHz
Frequency resolution		0.01 Hz
Scaling	standard	linear
	with R&S®FPL1-K54 option, RBW ≤ 1 MHz	linear, logarithmic

Reference frequency, internal, nominal		
Accuracy		(time since last adjustment × aging rate) + temperature drift + calibration accuracy
Aging per year	standard	1×10^{-6}
	with R&S®FPL1-B4 OCXO reference frequency option	1×10^{-7}
Temperature drift (0 °C to +50 °C)	standard	1×10^{-6}
	with R&S®FPL1-B4 OCXO reference frequency option	1×10^{-7}
Achievable initial calibration accuracy	standard	5×10^{-7}
	with R&S®FPL1-B4 OCXO reference frequency option	5×10^{-8}

Frequency readout		
Marker resolution		0.01 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference uncertainty} + 10 \% \times \text{resolution bandwidth} + \frac{1}{2}(\text{span} / (\text{sweep points} - 1)) + 1 \text{ Hz})$
Number of sweep (trace) points	default value	1001
	range	101 to 100001
Number of measurement points	with R&S®FPL1-K54, active EMI measurement	101 to 200001
Marker tuning frequency step size	marker step size = sweep points	$\text{span} / (\text{sweep points} - 1)$
	marker step size = standard	$\text{span} / (\text{default sweep points} - 1)$
Frequency counter resolution		0.001 Hz
Count accuracy		$\pm(\text{frequency} \times \text{reference uncertainty} + \frac{1}{2}(\text{last digit}))$
Display range for frequency axis		0 Hz, 10 Hz to max. frequency
Resolution		0.1 Hz
Maximum span deviation		0.1 %

Frequency spectral purity

SSB phase noise	frequency = 1000 MHz, carrier offset	
	100 Hz	-88 dBc (1 Hz) (nom.)
	1 kHz	< -99 dBc (1 Hz)
	10 kHz	< -105 dBc (1 Hz), -108 dBc (1 Hz) (typ.)
	100 kHz	< -110 dBc (1 Hz), -115 dBc (1 Hz) (typ.)
	1 MHz	< -130 dBc (1 Hz), -135 dBc (1 Hz) (typ.)
	10 MHz	-152 dBc (1 Hz) (nom.)

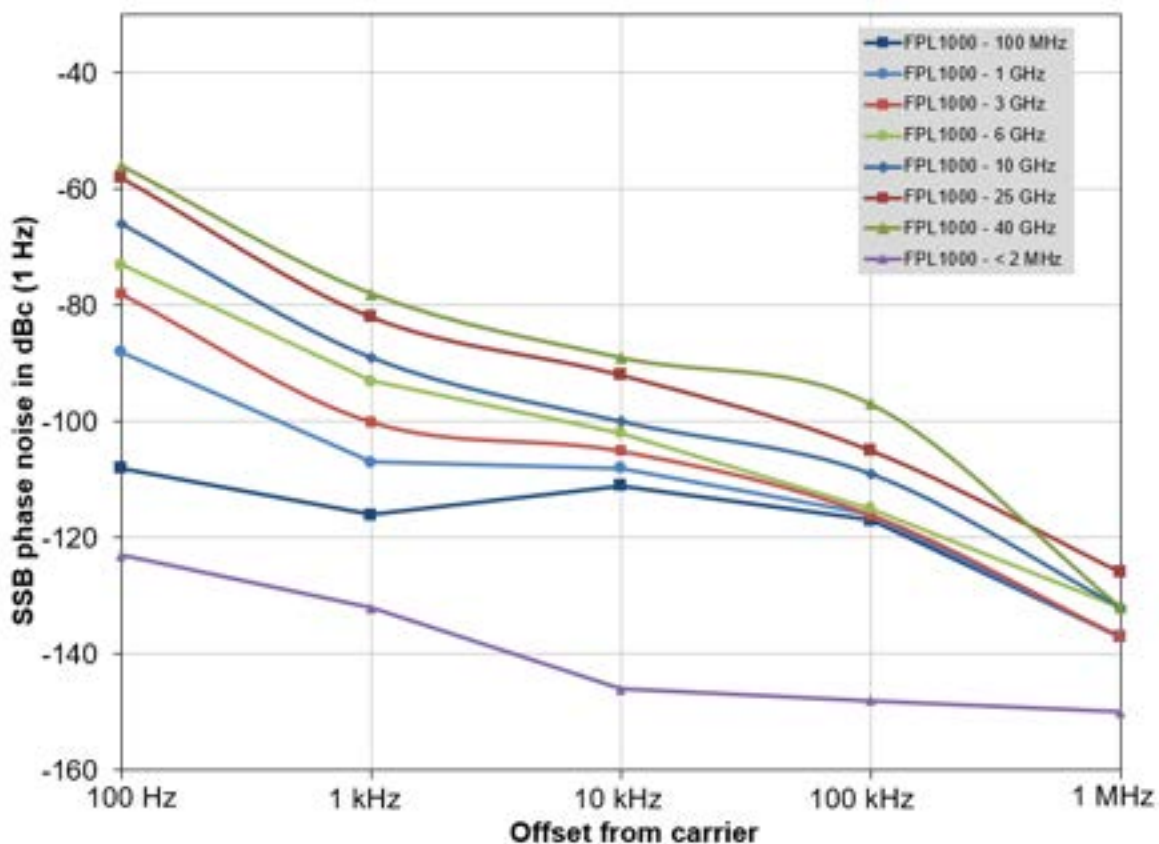

Measured SSB phase noise at different center frequencies

Sweep time

Range	span = 0 Hz	1 μ s to 8000 s
	span $\geq$ 10 Hz, RBW $\geq$ 100 kHz	1 ms to 8000 s ¹
	span $\geq$ 10 Hz, RBW < 100 kHz	75 μ s to 8000 s ²
Sweep time accuracy	span = 0 Hz	0.1 % (nom.)
	span $\geq$ 10 Hz, RBW $\geq$ 100 kHz	3 % (nom.)

Resolution bandwidths

Sweep filters and FFT filters³		
Resolution bandwidths (-3 dB)	sweep filters	100 kHz to 10 MHz, in 1/2/3/5 sequence
	FFT filters	1 Hz to 50 kHz, in 1/2/3/5 sequence
Bandwidth uncertainty		< 3 % (nom.)
Shape factor 60 dB:3 dB		< 5 (nom.)

¹ Net sweep time without additional hardware settling time.² Time for data acquisition for FFT calculation.³ At a filter bandwidth of $\leq$ 50 kHz the device automatically switches to FFT sweep mode.

Channel filters ³		
Bandwidths (–3 dB)		100/200/300/500 Hz 1/1.5/2/2.4/2.7/3/3.4/4/4.5/5/6/7.5/8.5/9/ 10/12.5/14/15/16/20/21/25/30/50/100/150/ 192/200/300/500 kHz 1/1.228/1.5/2/3/3.75/5/10 MHz
Bandwidth uncertainty		< 2 % (nom.)
Shape factor 60 dB:3 dB		< 2 (nom.)
EMI filters ³ (with R&S®FPL1-K54 option)		
Bandwidths (–6 dB)		10/100/200 Hz 1/9/10/100/120 kHz 1 MHz
Bandwidth uncertainty		< 3 % (nom.)
Shape factor 60 dB:6 dB		< 4 (nom.)
Video bandwidths		1 Hz to 10 MHz, in 1/2/3/5 sequence

Signal analysis bandwidth

Maximum signal analysis bandwidth (equalized)	R&S®FPL1003, R&S®FPL1007 ≤ 7.5 GHz; R&S®FPL1014, R&S®FPL1026 < 6 GHz; R&S®FPL1044 < 7 GHz	
	standard	12.8 MHz (nom.)
	with R&S®FPL1-B40 option	40 MHz (nom.)
	R&S®FPL1014, R&S®FPL1026 ≥ 6 GHz; R&S®FPL1044 ≥ 7 GHz	
	standard	12.8 MHz (nom.)
	with R&S®FPL1-B40 and R&S®FPL1-B11 options, YIG preselector: off	40 MHz (nom.)

Level measurement uncertainty and range

Display range		displayed noise floor up to +30 dBm
Maximum input level		
DC voltage		50 V
CW RF power	RF preamplifier: off	
	RF attenuation: 0 dB	20 dBm (= 0.1 W)
	RF attenuation ≥ 10 dB	30 dBm (= 1 W)
	with R&S®FPL1-B22 option, RF preamplifier: on	
	RF attenuation: 0 dB	13 dBm (= 20 mW)
	RF attenuation ≥ 10 dB	23 dBm (= 200 mW)
Pulse spectral density	RF attenuation: 0 dB, RF preamplifier: off	97 dBμV/MHz
Maximum pulse voltage	RF attenuation ≥ 10 dB, RF preamplifier: off	150 V
Maximum pulse energy	RF attenuation ≥ 10 dB, pulse duration: 10 μs, RF preamplifier: off	1 mWs
Level display		
Logarithmic level axis		1 dB to 200 dB, in 1 dB steps
Linear level axis		10 % of reference level per level division, 10 divisions or logarithmic scaling
Number of traces		6
Trace detector		max. peak, min. peak, auto peak (normal), sample, RMS, average
Trace functions		clear/write, max. hold, min. hold, average, view
EMI detectors	with R&S®FPL1-K54 option	quasi-peak, RMS-average, CISPR-average
Measurement marker detector	with R&S®FPL1-K54 option	max. peak, average, quasi-peak, RMS-average, CISPR-average

Setting range of reference level		–130 dBm to (–13 dBm + RF attenuation – RF preamplifier gain), in steps of 0.01 dB
Units of level axis		dBm, dBμV, dBmV, dBμA, dBpW, V, A, W

Level measurement uncertainty		
Absolute level uncertainty at 50 MHz	RBW = 10 kHz, level = –10 dBm, reference level = –10 dBm, RF attenuation: 10 dB	
	+20 °C to +30 °C	< 0.3 dB ($\sigma = 0.1$ dB)
	0 °C to +50 °C	< 0.5 dB ($\sigma = 0.17$ dB)
Frequency response referenced to 50 MHz	RF attenuation: 10/20/30/40 dB, RF preamplifier: off, +20 °C to +30 °C	
	R&S®FPL1003, R&S®FPL1007	
	5 kHz ≤ f < 3 MHz	< 1 dB (nom.)
	3 MHz ≤ f < 3 GHz	< 0.3 dB ($\sigma = 0.1$ dB)
	3 GHz ≤ f < 7.5 GHz	< 0.6 dB ($\sigma = 0.2$ dB)
	R&S®FPL1014, R&S®FPL1026	
	5 kHz ≤ f < 3 MHz	< 1 dB (nom.)
	3 MHz ≤ f < 3 GHz	< 0.3 dB ($\sigma = 0.1$ dB)
	3 GHz ≤ f < 7.5 GHz	< 0.6 dB ($\sigma = 0.2$ dB)
	7.5 GHz ≤ f < 14 GHz	< 1.5 dB ($\sigma = 0.5$ dB)
	14 GHz ≤ f < 26.5 GHz	< 2.0 dB ($\sigma = 0.66$ dB)
	R&S®FPL1044	
	10 Hz ≤ f < 9 kHz ⁶	< 1.5 dB (nom.)
	9 kHz ≤ f < 50 kHz	< 1.0 dB ($\sigma = 0.33$ dB)
	50 kHz ≤ f < 3 GHz	< 0.6 dB ($\sigma = 0.2$ dB)
	3 GHz ≤ f < 6 GHz	< 0.6 dB ($\sigma = 0.2$ dB)
	6 GHz ≤ f < 14 GHz	< 1.5 dB ($\sigma = 0.5$ dB)
	14 GHz ≤ f < 26.5 GHz	< 2.0 dB ($\sigma = 0.66$ dB)
	26.5 GHz ≤ f < 36 GHz	< 2.5 dB ($\sigma = 0.83$ dB)
	36 GHz ≤ f ≤ 44 GHz	< 3.0 dB ($\sigma = 1.0$ dB)
	any setting of RF attenuation, RF preamplifier: off, 0 °C to +50 °C	
	R&S®FPL1003, R&S®FPL1007	
	5 kHz ≤ f < 3 GHz	< 1 dB (nom.)
	3 GHz ≤ f < 7.5 GHz	< 1.5 dB (nom.)
	R&S®FPL1014, R&S®FPL1026	
	5 kHz ≤ f < 3 GHz	< 1 dB (nom.)
	3 GHz ≤ f < 7.5 GHz	< 1.5 dB (nom.)
	7.5 GHz ≤ f < 14 GHz	< 2.5 dB (nom.)
	14 GHz ≤ f < 26.5 GHz	< 3.0 dB (nom.)
	R&S®FPL1044	
	10 Hz ≤ f < 9 kHz ⁶	< 1.5 dB (nom.)
	9 kHz ≤ f < 3 GHz	< 1 dB (nom.)
	3 GHz ≤ f < 6 GHz	< 1.5 dB (nom.)
	6 GHz ≤ f < 14 GHz	< 2.5 dB (nom.)
	14 GHz ≤ f < 26.5 GHz	< 3.0 dB (nom.)
	26.5 GHz ≤ f ≤ 44 GHz	< 3.5 dB (nom.)
	RF attenuation ≤ 20 dB, RF preamplifier: on, +20 °C to +30 °C	
	R&S®FPL1003, R&S®FPL1007	
	3 MHz ≤ f < 3 GHz	< 0.6 dB ($\sigma = 0.2$ dB)
	3 GHz ≤ f < 7.5 GHz	< 1.0 dB ($\sigma = 0.33$ dB)
	R&S®FPL1014, R&S®FPL1026	
	3 MHz ≤ f < 3 GHz	< 0.6 dB ($\sigma = 0.2$ dB)
	3 GHz ≤ f < 7.5 GHz	< 1.0 dB ($\sigma = 0.33$ dB)
	7.5 GHz ≤ f < 14 GHz	< 2.5 dB ($\sigma = 0.83$ dB)
	14 GHz ≤ f < 26.5 GHz	< 3.0 dB ($\sigma = 1.0$ dB)
	R&S®FPL1044	
	10 Hz ≤ f < 9 kHz ⁶	< 1.5 dB (nom.)
	9 kHz ≤ f < 3 GHz	< 0.6 dB ($\sigma = 0.2$ dB)
	3 GHz ≤ f < 6 GHz	< 1.0 dB ($\sigma = 0.33$ dB)
	6 GHz ≤ f < 14 GHz	< 2.5 dB ($\sigma = 0.83$ dB)
	14 GHz ≤ f < 26.5 GHz	< 3.0 dB ($\sigma = 1.0$ dB)
	26.5 GHz ≤ f ≤ 44 GHz	< 3.5 dB ($\sigma = 1.08$ dB)

Attenuator switching uncertainty	f = 50 MHz, 0 dB to 45 dB, referenced to 10 dB attenuation	< 0.2 dB ($\sigma = 0.07$ dB)
Uncertainty of reference level setting		0 dB ⁴
Bandwidth switching uncertainty	referenced to RBW = 10 kHz and sweep type: FFT	
	sweep type: FFT, RBW < 100 kHz	< 0.1 dB (nom.)
	sweep type: sweep, RBW $\geq$ 100 kHz	< 0.2 dB (nom.)

Nonlinearity of displayed level		
Logarithmic level display	S/N > 16 dB, 0 dB to –50 dB	< 0.1 dB ($\sigma = 0.07$ dB)
	R&S®FPL1044	
	S/N > 16 dB, –50 dB to –70 dB	< 0.5 dB ($\sigma = 0.16$ dB)
Linear level display	S/N > 16 dB, 0 dB to –70 dB	5 % of reference level (nom.)

Total measurement uncertainty	signal level: 0 dB to –50 dB below reference level, S/N > 20 dB, sweep time: auto, sweep type: FFT, RF attenuation: 10/20/30/40 dB, RF preamplifier: off, span / RBW < 100, confidence level: 95 %, +20 °C to +30 °C	
	R&S®FPL1003, R&S®FPL1007	
	1 MHz $\leq$ f < 3 GHz	0.5 dB
	3 GHz $\leq$ f < 7.5 GHz	0.8 dB
	7.5 GHz $\leq$ f < 14 GHz	1.2 dB
	14 GHz $\leq$ f < 26.5 GHz	1.8 dB
	R&S®FPL1014, R&S®FPL1026	
	1 MHz $\leq$ f < 3 GHz	0.5 dB
	3 GHz $\leq$ f < 7.5 GHz	0.8 dB
	7.5 GHz $\leq$ f < 14 GHz	1.2 dB
	14 GHz $\leq$ f < 26.5 GHz	1.8 dB
	R&S®FPL1044	
	9 kHz $\leq$ f < 50 kHz	0.7 dB
	50 kHz $\leq$ f < 3 GHz	0.5 dB
	3 GHz $\leq$ f < 6 GHz	0.8 dB
	6 GHz $\leq$ f < 14 GHz	1.2 dB
	14 GHz $\leq$ f < 26.5 GHz	1.8 dB
	26.5 GHz $\leq$ f < 36 GHz	1.8 dB
	36 GHz $\leq$ f $\leq$ 44 GHz	2.0 dB

Intermodulation, sensitivity and spurious response

Intermodulation		
1 dB compression of input mixer (two tone)	RF attenuation: 0 dB, RF preamplifier: off	+7 dBm (nom.)
Third-order intercept point (TOI) ⁵	RF attenuation: 0 dB, level = –20 dBm (both), $\Delta f > 5 \times$ RBW or 10 kHz, whichever is larger, RF preamplifier: off	
	10 MHz $\leq$ f _{in} < 300 MHz	> 13 dBm, 16 dBm (typ.)
	300 MHz $\leq$ f _{in} < 3 GHz	> 17 dBm, 20 dBm (typ.)
	3 GHz $\leq$ f _{in} < 6 GHz	> 15 dBm, 18 dBm (typ.)
	6 GHz $\leq$ f _{in} < 20 GHz	> 13 dBm, 18 dBm (typ.)
	20 GHz $\leq$ f _{in} $\leq$ 44 GHz	> 15 dBm, 18 dBm (typ.)
	with R&S®FPL1-B22 option, RF attenuation: 0 dB, level = –40 dBm (both), $\Delta f > 5 \times$ RBW or 10 kHz, whichever is larger, RF preamplifier: on	
	5 MHz $\leq$ f _{in} < 6 GHz	0 dBm (nom.)
	6 GHz $\leq$ f _{in} < 26.5 GHz	–6 dBm (nom.)
	26.5 GHz $\leq$ f _{in} $\leq$ 44 GHz	–6 dBm (nom.)
Second-harmonic intercept (SHI)	RF attenuation: 0 dB, level = –13 dBm, RF preamplifier: off	
	1 MHz < f _{in} < 900 MHz	45 dBm (nom.)
	900 MHz $\leq$ f _{in} $\leq$ 13.25 GHz	70 dBm (nom.)
	13.25 GHz < f _{in} $\leq$ 22 GHz	73 dBm (nom.)

⁴ The setting of the reference level affects only the graphical representation of the measurement result on the display, not the measurement itself. Therefore, the reference level setting causes no additional uncertainty in measurement results.

⁵ TOI specifications at frequencies > 20 GHz are nominal for R&S®FPL1026.

Displayed average noise level (DANL)		
RF preamplifier off	RF attenuation: 0 dB, termination: 50 Ω , log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, sample detector, +20 °C to +30 °C	
	R&S®FPL1003, R&S®FPL1007	
	5 kHz $\leq f < 100$ kHz	–143 dBm (typ.)
	100 kHz $\leq f < 5$ MHz	< –140 dBm, –143 dBm (typ.)
	5 MHz $\leq f < 3$ GHz	< –149 dBm, –152 dBm (typ.)
	3 GHz $\leq f < 5$ GHz	< –143 dBm, –146 dBm (typ.)
	5 GHz $\leq f \leq 7.5$ GHz	< –140 dBm, –143 dBm (typ.)
	R&S®FPL1014, R&S®FPL1026	
	5 kHz $\leq f < 100$ kHz	–143 dBm (typ.)
	100 kHz $\leq f < 5$ MHz	< –140 dBm, –143 dBm (typ.)
	5 MHz $\leq f < 3$ GHz	< –147 dBm, –150 dBm (typ.)
	3 GHz $\leq f < 6$ GHz	< –143 dBm, –146 dBm (typ.)
	6 GHz $\leq f < 14$ GHz	< –141 dBm, –144 dBm (typ.)
	14 GHz $\leq f < 20$ GHz	< –135 dBm, –140 dBm (typ.)
	20 GHz $\leq f \leq 26.5$ GHz	< –132 dBm, –135 dBm (typ.)
	R&S®FPL1044	
	10 Hz $\leq f < 5$ kHz	–100 dBm (nom.)
	5 kHz $\leq f < 100$ kHz	< –140 dBm, –143 dBm (typ.)
	100 kHz $\leq f < 5$ MHz	< –141 dBm, –147 dBm (typ.)
	5 MHz $\leq f < 3$ GHz	< –147 dBm, –150 dBm (typ.)
	3 GHz $\leq f < 6$ GHz	< –143 dBm, –146 dBm (typ.)
	6 GHz $\leq f < 14$ GHz	< –141 dBm, –144 dBm (typ.)
	14 GHz $\leq f < 20$ GHz	< –135 dBm, –140 dBm (typ.)
	20 GHz $\leq f < 26.5$ GHz	< –132 dBm, –140 dBm (typ.)
	26.5 GHz $\leq f \leq 44$ GHz	< –133 dBm, –135 dBm (typ.)
RF preamplifier on (gain: nom. 20 dB)	RF attenuation: 0 dB, termination: 50 Ω , log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, sample detector, +20 °C to +30 °C	
	R&S®FPL1003, R&S®FPL1007	
	3 MHz $\leq f < 10$ MHz	< –155 dBm, –158 dBm (typ.)
	10 MHz $\leq f < 2$ GHz	< –163 dBm, –166 dBm (typ.)
	2 GHz $\leq f < 3$ GHz	< –162 dBm, –165 dBm (typ.)
	3 GHz $\leq f < 5$ GHz	< –158 dBm, –161 dBm (typ.)
	5 GHz $\leq f < 7$ GHz	< –156 dBm, –159 dBm (typ.)
	7 GHz $\leq f < 7.5$ GHz	< –155 dBm, –158 dBm (typ.)
	R&S®FPL1014, R&S®FPL1026	
	10 MHz $\leq f < 2$ GHz	< –160 dBm, –163 dBm (typ.)
	2 GHz $\leq f < 6$ GHz	< –158 dBm, –161 dBm (typ.)
	6 GHz $\leq f < 14$ GHz	< –158 dBm, –163 dBm (typ.)
	14 GHz $\leq f < 18$ GHz	< –158 dBm, –161 dBm (typ.)
	18 GHz $\leq f \leq 26.5$ GHz	< –156 dBm, –158 dBm (typ.)
	R&S®FPL1044	
	5 kHz $\leq f < 30$ MHz ⁶	< –155 dBm, –160 dBm (typ.)
	30 MHz $\leq f < 2$ GHz	< –160 dBm, –163 dBm (typ.)
	2 GHz $\leq f < 6$ GHz	< –158 dBm, –165 dBm (typ.)
	6 GHz $\leq f < 14$ GHz	< –158 dBm, –163 dBm (typ.)
	14 GHz $\leq f < 18$ GHz	< –158 dBm, –161 dBm (typ.)
	18 GHz $\leq f < 26.5$ GHz	< –156 dBm, –160 dBm (typ.)
	26.5 GHz $\leq f \leq 44$ GHz	< –152 dBm, –157 dBm (typ.)
Spurious responses		
mixer level ≤ -13 dBm, sweep optimization: auto or dynamic, scaling linear		
Image response	10 MHz $\leq f \leq 3$ GHz	
	$f_{in} - 2 \times 4020.4$ MHz (1st IF)	< –90 dBc (typ.)
	$f_{in} - 2 \times 820.4$ MHz (2nd IF)	< –80 dBc
	$f_{in} - 2 \times 20.4$ MHz (3rd IF), RBW ≤ 3 MHz	< –80 dBc
	3 GHz $< f \leq 14$ GHz, RBW ≤ 3 MHz	< –70 dBc (typ.)
	14 GHz $< f \leq 44$ GHz, RBW ≤ 3 MHz	< –65 dBc (typ.)

⁶ Input coupling: DC.

Intermediate frequency response	2 MHz $\leq f \leq$ 3 GHz	
	4020.4 MHz (1st IF)	< -80 dBc (typ.)
	820.4 MHz (2nd IF)	< -80 dBc
	20.4 MHz (3rd IF)	< -80 dBc
	3 GHz $< f \leq$ 44 GHz	< -70 dBc
Residual spurious response	RF attenuation: 0 dB	
	f $\leq$ 1 MHz	< -90 dBm (nom.)
	f > 1 MHz	< -90 dBm, -100 dBm (typ.)
Local oscillator related spurious	f < 3 GHz	
	1 kHz $\leq$ carrier offset $\leq$ 10 MHz	< -70 dBc
	carrier offset > 10 MHz	< -80 dBc
	3 GHz $\leq f <$ 14 GHz	< -70 dBc
	R&S®FPL1014, R&S®FPL1026	
	14 GHz $\leq f \leq$ 26.5 GHz	< -67 dBc
	R&S®FPL1044	
	14 GHz $\leq f \leq$ 44 GHz	
	1 kHz $\leq$ carrier offset $\leq$ 10 MHz	< -90 dBc + 20log(f _{in} /GHz)
	carrier offset > 10 MHz	< -110 dBc + 20log(f _{in} /GHz)
Other interfering signals		
Subharmonic of 1st LO	20 MHz $\leq f <$ 3 GHz, spurious at 4020.4 MHz – 2 × f _{in}	< -80 dBc (nom.)
Harmonic of 1st LO	20 MHz $\leq f <$ 3 GHz, mixer level < -25 dBm, spurious at f _{in} – 2010.2 MHz	< -80 dBc (nom.)

Measurement speed

Local measurement and display update rate	1001 sweep points, sweep optimization set to "speed"	1 ms (1000/s) (nom.)
Maximum sweep rate, remote operation ^{7,8}	trace average: on	0.9 ms (1100/s) (nom.)
Remote measurement and LAN transfer ⁷		3.2 ms (357/s) (nom.)
Marker peak search ⁷		1.9 ms (nom.)
Center frequency tune + sweep + sweep data transfer ⁷		16 ms (nom.)

Trigger functions

Trigger		
Trigger source		free run, video, external, IF power, I/Q power
Trigger offset	span $\geq$ 10 Hz	0 s to 20 s
	span = 0 Hz	(–sweep time) to 20 s
Maximum deviation of trigger offset		±10 ns
IF power trigger		
Sensitivity	minimum signal power	-60 dBm + RF attenuation – RF preamplifier gain
	maximum signal power	-15 dBm + RF attenuation – RF preamplifier gain
IF power trigger bandwidth	RBW > 5 MHz	40 MHz (nom.)
	RBW $\leq$ 5 MHz	6 MHz (nom.)
Gated sweep		
Gate source		video, external, IF power, I/Q power
Gate delay		0 s to 20 s, min. resolution: 10 ns
Gate length		10 ns to 20 s, min. resolution: 10 ns
Maximum deviation of gate length		±10 ns

I/Q data

Interface		GPIO or LAN interface
Memory length		max. 25 Msample I and Q
Word length of I/Q samples		14 bit
Sampling rate	standard	100 Hz to 16 MHz
	with R&S®FPL1-B40 option	100 Hz to 100 MHz

⁷ Measured with a PC equipped with Intel Core i7 2.8 GHz and 1 Gigabit LAN interface.

⁸ Measurement is performed with a sweep count of 1000. The indicated speed is the average speed of 1 sweep.

Maximum signal analysis bandwidth (equalized)	standard	12.8 MHz
	with R&S®FPL1-B40 option	40 MHz
Signal analysis bandwidth ≤ 10 MHz, R&S®FPL1003 and R&S®FPL1007		
Amplitude flatness	$f_{\text{center}} \geq 12 \text{ MHz}$ and $(1.25 \times \text{signal analysis bandwidth})$	±0.3 dB (nom.)
Deviation from linear phase	$f_{\text{center}} \geq 12 \text{ MHz}$ and $(1.25 \times \text{signal analysis bandwidth})$	±1° (nom.)
Signal analysis bandwidth ≤ 10 MHz, R&S®FPL1014 and R&S®FPL1026		
Amplitude flatness	$f_{\text{center}} \geq 30 \text{ MHz}$ and $(1.25 \times \text{signal analysis bandwidth})$	±1.0 dB (nom.)
Deviation from linear phase	$f_{\text{center}} \geq 30 \text{ MHz}$ and $(1.25 \times \text{signal analysis bandwidth})$	±2° (nom.)
Signal analysis bandwidth ≤ 40 MHz, R&S®FPL1003 and R&S®FPL1007		
Amplitude flatness	$f_{\text{center}} \geq 12 \text{ MHz}$ and $(1.25 \times \text{signal analysis bandwidth})$	±0.5 dB (nom.)
Deviation from linear phase	$f_{\text{center}} \geq 12 \text{ MHz}$ and $(1.25 \times \text{signal analysis bandwidth})$	±1.5° (nom.)
Signal analysis bandwidth ≤ 40 MHz, R&S®FPL1014 and R&S®FPL1026, $f_{\text{center}} \leq 6 \text{ GHz}$		
Amplitude flatness	$f_{\text{center}} \geq 30 \text{ MHz}$ and $(1.25 \times \text{signal analysis bandwidth})$	±0.5 dB (nom.)
Deviation from linear phase	$f_{\text{center}} \geq 30 \text{ MHz}$ and $(1.25 \times \text{signal analysis bandwidth})$	±1.5° (nom.)
Signal analysis bandwidth ≤ 40 MHz, R&S®FPL1014 and R&S®FPL1026, $f_{\text{center}} > 6 \text{ GHz}$, YIG preselector: off ⁹		
Amplitude flatness		±1.5 dB (nom.)
Deviation from linear phase		±3° (nom.)

Inputs and outputs

RF input		
Impedance		50 Ω
Connector	R&S®FPL1003, R&S®FPL1007, R&S®FPL1014	type N female
	R&S®FPL1026	test port adapter, PC 2.92 mm female (interchangeable port connector system)
	R&S®FPL1044	2.92 male (compatible with SMA, and 3.5 mm)
VSWR	R&S®FPL1003, R&S®FPL1007, R&S®FPL1014, R&S®FPL1026	
	RF attenuation ≥ 10 dB	
	10 MHz ≤ f < 3 GHz	< 1.5 (nom.)
	3 GHz ≤ f < 7.5 GHz	< 2 (nom.)
	7.5 GHz ≤ f < 26.5 GHz	< 2 (nom.)
	R&S®FPL1044	
	RF attenuation ≥ 10 dB	
	5 kHz ≤ f < 10 MHz	< 2.3 (nom.)
	10 MHz ≤ f < 100 MHz	< 2.3 (meas.)
	100 MHz ≤ f < 7.5 GHz	< 1.8 (meas.)
Setting range of attenuator	standard	0 dB to 45 dB, in 5 dB steps
	with R&S®FPL1-B25 option	0 dB to 45 dB, in 1 dB steps
	with R&S®FPL1-B22 option	20 dB (nom.)
USB interfaces		
	front	2 ports, type A plug, version 2.0
	Rear	2 ports, type A plug, version 3.1

Reference output		
Connector		BNC female
Impedance		50 Ω
Output frequency	internal reference	10 MHz
	external reference	same as reference input signal
Level		> 0 dBm (nom.)

⁹ R&S®FPL1-B11 option required.

Reference input		
Connector		BNC female
Impedance		50 Ω
Input frequency range		10 MHz $\pm$ 5 ppm
Required level		> 0 dBm into 50 Ω
External trigger/gate input		
Connector		BNC female
Trigger voltage		0.5 V to 3.5 V
Input impedance		10 k Ω
LAN interface		
Connector		10/100/1000BASE-T RJ-45
External monitor		
Connector ¹⁰		DisplayPort Rev. 1.3

General data

Display		
Resolution		21 cm LC TFT color display (10.1") 1280 $\times$ 800 pixel (WXGA resolution)
Pixel failure rate		< 1 $\times$ 10 ⁻⁵
Data storage		
Internal ¹¹	standard	solid-state drive (SSD), 128 Gbyte
External		supports USB 2.0/3.1 compatible memory devices
Environmental conditions		
Temperature	operating temperature range	0 °C to +50 °C
	storage temperature range	-20 °C to +70 °C
Damp heat	without condensation	+40 °C at 85 % rel. humidity, in line with EN 60068-2-30
Mechanical resistance		
Vibration	sinusoidal	5 Hz to 55 Hz, 0.15 mm constant amplitude (1.8 g at 55 Hz); 55 Hz to 150 Hz, acceleration: 0.5 g constant; in line with EN 60068-2-6
	random	5 Hz to 500 Hz, acceleration: 1.2 g (RMS), in line with EN 60068-2-64, MIL-PRF-28800F
Shock		40 g shock spectrum, in line with MIL-STD-810E, method no. 516.4, procedure I, MIL-PRF-28800F
EMC		
		in line with EMC Directive 2014/30/EU including • IEC/EN 61326-1 ^{12, 13} • IEC/EN 61326-2-1 • CISPR 11/EN 55011 ¹² • IEC/EN 61000-3-2 • IEC/EN 61000-3-3
EU legislation		
	for details, see user documentation	EU: in line with Data Act – Regulation (EU) 2023/2854
Recommended calibration interval		
		1 year

¹⁰ Instruments with SN < 300000 are equipped with IPS2 PC module and only provide a DVI-D connector.

¹¹ Instruments with SN < 300000 are equipped with IPS2 PC module and only provide 32 Gbyte of internal data storage.

¹² Emission limits for class A equipment.

¹³ Immunity test requirement for industrial environment (EN 61326, table 2).

Power supply		
AC supply		100 V to 240 V $\pm$ 10 %, 50 Hz to 60 Hz $\pm$ 5 %
Safety		in line with • EN 61010-1 • IEC 61010-1 • UL 61010-1 • CAN/CSA-C22.2 No. 61010-1
Test marks ¹⁴		CE, cCSA _{US} , KCC

Power consumption		
Operating	R&S®FPL1003, R&S®FPL1007	65 W (nom.), max. 115 W with all options ¹⁵
	R&S®FPL1014	80 W (nom.), max. 130 W with all options ¹⁵
	R&S®FPL1026	85 W (nom.), max. 140 W with all options ¹⁵
	R&S®FPL1044	110 W (nom.), max. 160 W with all options ¹⁵
Non-operating	standby (all models)	
	without R&S®FPL1-B4 option	5 W (nom.)
	with R&S®FPL1-B4 option	8 W (nom.)
	internal battery (R&S®FPL1-B31 option) in charge mode	85 W (nom.)
	power off (all models)	0 W (nom.)

Dimensions and weight		
Dimensions	W × H × D	408 mm × 186 mm × 235 mm (16.06 in × 7.32 in × 9.25 in)
Net weight without options, nominal	R&S®FPL1003, R&S®FPL1007	6 kg (13.22 lb)
	R&S®FPL1014, R&S®FPL1026	7 kg (15.43 lb)
	R&S®FPL1044	7.7 kg (17 lb)
Net weight with internal battery, nominal	R&S®FPL1003, R&S®FPL1007	7.3 kg (16 lb)
	R&S®FPL1014, R&S®FPL1026	8.3 kg (17.64 lb)
	R&S®FPL1044	9 kg (19.84 lb)

¹⁴ cCSA_{US} certification for R&S®FPL1044 is in preparation and pending.

¹⁵ Power consumption varies depending on mode of operation and options installed. The specified maximum power consumption includes R&S®FPL1-B31 option with both batteries in charge mode.

Options

R&S®FPL1-B5 additional interfaces

User port		
Connector		25-pin D-Sub female
Output		TTL-compatible, 0 V/5 V, max. 15 mA
Input		TTL-compatible, max. 5 V
Noise source control and power sensor		
Connectors	for R&S®FS-SNSxx smart noise sources and R&S®NRP-Zxx power sensors	7-pin LEMOSA female
	for noise source control	BNC female
Noise source control output voltage		0 V/28 V, switchable, max. 100 mA (nom.)
IF/Video		
Connector		BNC female, 50 Ω
IF Out		
Bandwidth		equal to RBW setting
IF frequency		25 MHz
Output level	center frequency > 10 MHz, span = 0 Hz, signal at reference level and center frequency	0 dBm (nom.)
Video Out		
Bandwidth		equal to VBW setting
Output scaling	log. display scale	logarithmic
	lin. display scale	linear
Output level	center frequency > 10 MHz, span = 0 Hz, signal at reference level and center frequency	1 V, open-circuit (nom.)
Audio output		
Loudspeaker		built-in, adjustable
AF out		
Connector		3.5 mm mini jack
Output impedance		10 Ω
Open-circuit voltage		up to 1.5 V, adjustable

R&S®FPL1-B9 internal generator ¹⁶

Frequency		
Frequency range	R&S®FPL1003	5 kHz to 3 GHz
	R&S®FPL1007, R&S®FPL1014, R&S®FPL1026	5 kHz to 7.5 GHz
Setting resolution	independent CW source	0.01 Hz

Frequency offset		
Setting range		0 Hz to $f_{\max}$ ¹⁷
Setting resolution		0.01 Hz


Spectral purity		
SSB phase noise	frequency = 1 GHz, output level = 0 dBm	
	carrier offset = 10 kHz	< -102 dBc (1 Hz), -108 dBc (1 Hz) (typ.)
	carrier offset = 100 kHz	< -105 dBc (1 Hz), -111 dBc (1 Hz) (typ.)
	carrier offset = 1 MHz	< -117 dB (1 Hz), -130 dBc (1 Hz) (typ.)
Harmonics	output level = 0 dBm, +20 °C to +30 °C	
	5 kHz ≤ f < 100 kHz	< -30 dBc (nom.)
	100 kHz ≤ f ≤ 7.5 GHz ¹⁸	< -30 dBc
Non-harmonic spurious	output level = 0 dBm	
	1 kHz < offset from carrier ≤ 4 MHz	-35 dBc (nom.)
	offset from carrier > 4 MHz	< -35 dBc, -45 dBc (typ.)

Level		
Specified level range		-50 dBm to 0 dBm
Setting resolution		0.1 dB
Setting range		-60 dBm to +10 dBm
Absolute level uncertainty	frequency = 50 MHz, +20 °C to +30 °C, output level = -10 dBm, frequency offset = 0 Hz	< 0.5 dB
Frequency response	output level = -10 dBm, referenced to level at 50 MHz, +20 °C to +30 °C, frequency offset = 0 Hz	
	100 kHz ≤ f ≤ 3 GHz	< 1 dB,
	3 GHz < f ≤ 7.5 GHz	< 1.5 dB, < 1 dB (typ.)
Level nonlinearity	for specified level range, referenced to -10 dBm output level, +20 °C to +30 °C, f ≥ 100 kHz	≤ 2 dB, < 0.5 dB (typ.)


¹⁶ Option R&S®FPL1-B9 is not available for R&S®FPL1044.

¹⁷ $f_{\max}$ depends on frequency range.

¹⁸ Limit is nominal for harmonics at frequencies > 20 GHz.

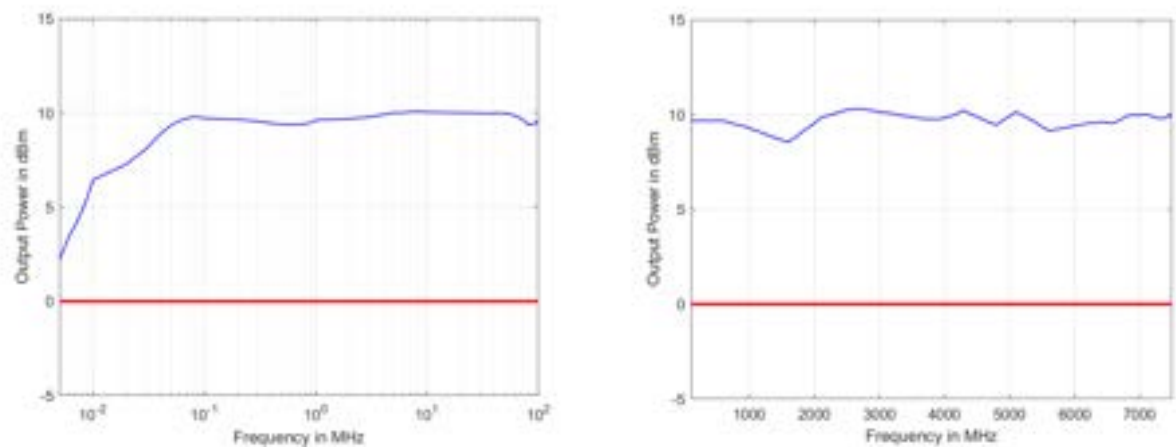

Maximum output power versus frequency, level in dBm (meas.)

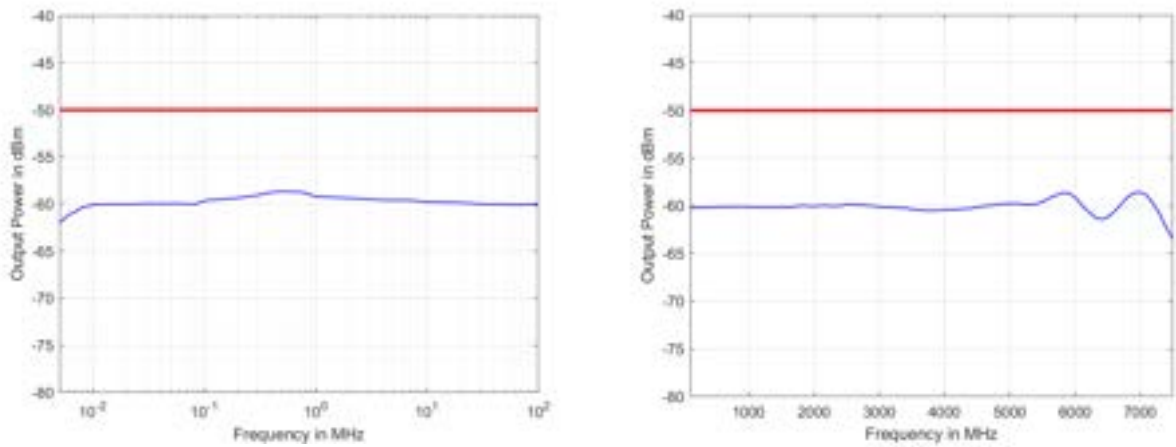

Minimum output power versus frequency, level in dBm (meas.)

Dynamic range	RBW = 1 kHz, f = 1 GHz	115 dB (nom.)
Power sweep		
Specified level range		−50 dBm to 0 dBm
Setting resolution		0.1 dB
Setting range		−60 dBm to +10 dBm
GEN output		
Connector		type N female, 50 Ω
VSWR		1.5 (nom.)
Reverse power		
DC voltage		50 V
CW RF power		30 dBm (= 1 W)
Maximum pulse voltage		150 V
Maximum pulse energy	pulse duration: 10 μs	1 mWs

R&S®FPL1-B10 GPIB interface

IEC/IEEE bus control		in line with IEC 625-2 (IEEE-488.2)
Command set		SCPI 1997.0
Connector		24-pin Amphenol female
Interface functions		SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0

R&S®FPL1-B30 DC power input 12 V/24 V

Input voltage range	DC	12 V to 24 V (nom.), 10.4 V to 28 V, switch-on voltage > 11 V (meas.)
Input current	$V_{in} = 12\text{ V}/24\text{ V}$	15 A/7.5 A (nom.)
	$V_{in} = 12\text{ V}/24\text{ V}$, operating mode, without internal batteries (R&S®FPL1-B31); R&S®FPL1003, R&S®FPL1007	5.5 A/2.7 A (meas.)
	$V_{in} = 12\text{ V}/24\text{ V}$, operating mode, without internal batteries (R&S®FPL1-B31); R&S®FPL1014, R&S®FPL1026	6.8 A/3.5 A (meas.)
	$V_{in} = 12\text{ V}/24\text{ V}$, operating mode, without internal batteries (R&S®FPL1-B31); R&S®FPL1044	7.9 A/3.8 A (meas.)
	$V_{in} = 12\text{ V}/24\text{ V}$, operating mode, internal batteries in charge mode; R&S®FPL1003, R&S®FPL1007	11 A/5 A (meas.)
	$V_{in} = 12\text{ V}/24\text{ V}$, operating mode, internal batteries in charge mode; R&S®FPL1014, R&S®FPL1026	11.8 A/5.4 A (meas.)
	$V_{in} = 12\text{ V}/24\text{ V}$, operating mode, internal batteries in charge mode; R&S®FPL1044	11.0 A/ 5.2 A (meas.)
	$V_{in} = 12\text{ V}/24\text{ V}$, standby mode, internal batteries in charge mode, R&S®FPL1-B31 model .02	6.5 A/3 A (meas.)
	$V_{in} = 12\text{ V}/24\text{ V}$, standby mode, internal batteries in charge mode, R&S®FPL1-B31 model .03	3.1 A/1.5 A (meas.)
Temperature	operating temperature range	0 °C to +40 °C
	storage temperature range	–20 °C to +70 °C

R&S®FPL1-B31 internal lithium-ion battery

Operating time	R&S®FPL1003, R&S®FPL1007	3.5 h (nom.)
	R&S®FPL1014, R&S®FPL1026	2.0 h (nom.)
	R&S®FPL1044	
	Preset, cont. sweep full span	2.0 h (nom.)
	Zero span at f_{max}	1.5 h (nom.)
Charge time	standby mode, AC supply	
	R&S®FPL1003, R&S®FPL1007, R&S®FPL1014, R&S®FPL1026	< 2 h (nom.)
	R&S®FPL1044	< 4 h (nom.)
	standby mode, external DC supply (R&S®FPL1-B30)	
	R&S®FPL1003, R&S®FPL1007, R&S®FPL1014, R&S®FPL1026	< 2 h (nom.)
	R&S®FPL1044	< 4 h (nom.)
	operating mode	
	R&S®FPL1003, R&S®FPL1007, R&S®FPL1014, R&S®FPL1026	< 4 h (nom.)
Temperature	R&S®FPL1044	< 6 h (nom.)
	operating temperature range, discharge	0 °C to +50 °C
	operating temperature range, charge	0 °C to +40 °C
	storage temperature range	–20 °C to +60 °C ¹⁹

¹⁹ The battery packs should be stored in an environment with low humidity, free from corrosive gas at a recommended temperature range < +21 °C. Extended exposure to temperatures above +45 °C could degrade battery performance and life.

R&S®FSV-B34 charger (only needed for charging spare batteries)

AC input voltage range		100 V to 240 V $\pm$ 10 % (nom.)
AC supply frequency		50 Hz to 60 Hz (nom.)
Power consumption		max. 300 W (nom.)
Number of charger bays		4
Dimensions	W $\times$ H $\times$ D	400 mm $\times$ 127 mm $\times$ 203 mm (15.75 in $\times$ 5 in $\times$ 8 in)
Net weight		3.1 kg (6.9 lb)

Ordering information

Designation	Type	Order No.
Spectrum analyzer, 5 kHz to 3 GHz	R&S®FPL1003	1304.0004.03
Spectrum analyzer, 5 kHz to 7.5 GHz	R&S®FPL1007	1304.0004.07
Spectrum analyzer, 5 kHz to 14 GHz	R&S®FPL1014	1304.0004.14
Spectrum analyzer, 5 kHz to 26.5 GHz	R&S®FPL1026	1304.0004.26
Spectrum analyzer, 10 Hz to 44 GHz	R&S®FPL1044	1304.0004.44
Accessories supplied		
Power cable and quick start guide		

Options

Designation	Type R&S®...	Order No.	Retrofit	Remarks	Available for R&S®FPL...				
					1003	1007	1014	1026	1044
OCXO reference frequency	FPL1-B4	1323.1902.02	yes	retrofit in service center	•	•	•	•	•
Additional interfaces	FPL1-B5	1323.1883.02	yes	user-retrofitable	•	•	•	•	•
Internal generator	FPL1-B9	1323.1925.03	no		•	—	—	—	—
Internal generator	FPL1-B9	1323.1925.07	no		—	•	•	•	—
GPIO interface	FPL1-B10	1323.1890.02	yes	user-retrofitable	•	•	•	•	•
YIG preselector bypass	FPL1-B11	1323.1619.02	yes	user-retrofitable	—	—	•	•	•
External generator control	FPL1-B12	1353.6660.02	yes	user-retrofitable	•	•	•	•	•
Second solid-state drive (SSD)	FPL1-B19	1304.0427.02	yes	user-retrofitable mounted on PC board, including analyzer firmware	•	•	•	•	—
Second solid-state drive (SSD)	FPL1-B19	1304.0427.03	yes	user-retrofitable mounted on PC board, including analyzer firmware; only available for devices with SN ≥ 300000	•	•	•	•	•
RF preamplifier (3 GHz/7.5 GHz)	FPL1-B22	1323.1719.02	yes	user-retrofitable	•	•	—	—	—
RF preamplifier (14 GHz)	FPL1-B22	1323.1702.02	yes	user-retrofitable	—	—	•	—	—
RF preamplifier (26.5 GHz)	FPL1-B22	1323.1777.02	yes	user-retrofitable;	—	—	—	•	—
RF preamplifier (44 GHz)	FPL1-B22	1353.6060.02	yes	user-retrofitable	—	—	—	—	•
1 dB steps for electronic attenuator	FPL1-B25	1323.1990.02	yes	user-retrofitable	•	•	•	•	•
DC power supply 12 V/24 V	FPL1-B30	1323.1877.02	yes	user-retrofitable	•	•	•	•	•
Internal lithium-ion battery	FPL1-B31	1323.1725.02	yes	retrofit in service center; including 2 battery packs and internal charging unit	•	•	•	•	—
Internal lithium-ion battery	FPL1-B31	1323.1725.03	yes	retrofit in service center; including 2 battery packs and internal charging unit	—	—	—	—	•
40 MHz analysis bandwidth	FPL1-B40	1323.1931.02	yes	user-retrofitable	•	•	•	•	•

Designation	Type	Order No.	Retrofit	Remarks	Available for R&S®FPL...				
	R&S®...				1003	1007	1014	1026	1044
Firmware									
AM/FM/PM measurement demodulator	FPL1-K7	1323.1731.02			•	•	•	•	•
Power sensor measurement with R&S®NRPxx power sensors	FPL1-K9	1323.1754.02		supports R&S®NRPxx power sensors	•	•	•	•	•
Noise figure and gain measurements	FPL1-K30	1323.1760.02		requires R&S®FPL1-B5	•	•	•	•	•
Security write protection for SSD	FPL1-K33	1323.1290.02		requires Windows 10 IoT Enterprise LTSC 2021 operating system or R&S®FPL1-U10	•	•	•	•	•
Phase noise measurement application	FPL1-K40	1323.1831.02			•	•	•	•	•
40 MHz real-time spectrum measurements	FPL1-K41R	1353.6702.02		CPU board IPS5 required (given for devices with SN > 300000)	•	•	•	•	•
EMI measurement application	FPL1-K54	1323.1783.02			•	•	•	•	•
Vector signal analysis	FPL1-K70	1323.1748.02			•	•	•	•	•
Multi-modulation analysis	FPL1-K70M	1323.1625.02		requires R&S®FPL1-K70	•	•	•	•	•
BER measurements with PRBS data	FPL1-K70P	1323.1631.02		requires R&S®FPL1-K70	•	•	•	•	•
Software									
License dongle	FSPC	1310.0002.03			•	•	•	•	•
Vector signal explorer base software	VSE	1320.7500.06			•	•	•	•	•
Vector signal analysis	VSE-K70	1320.7522.06			•	•	•	•	•
EUTRA/LTE NB-IoT	VSE-K106	1320.7900.06			•	•	•	•	•

Upgrades

Designation	Type	Order No.	Retrofittable	Remarks
Upgrade to Windows IoT Enterprise LTSC 2021	R&S®FPL1-U10	1353.5393.21	yes	contact the Rohde & Schwarz service center

Recommended extras

Designation	Type	Order No.
Protective hard cover	R&S®FPL1-Z1	1323.1960.02
Soft carrying bag for transport and outdoor operation	R&S®FPL1-Z2	1323.1977.02
H-style shoulder harness (requires R&S®FPL1-Z2 option)	R&S®FPL1-Z3	1323.1683.02
Spare lithium-ion battery pack	R&S®FPL1-Z4	1323.1677.02
Lithium-ion battery charger for charging spare batteries	R&S®FSV-B34	1321.3950.02
19" rackmount kit (RAL 5014) ²⁰	R&S®FPL1-Z6	1323.1954.02
19" rackmount kit (RAL 5000) ²⁰	R&S®FPL1-Z6B	1323.1954.03
D-Sub cable for TTL synchronization ²¹	R&S®FPL1-Z7	1353.6648.02
Headphone		0708.9010.00
Adapters for instruments with test-port adapter (R&S®FPL1026)		
Test port adapter, 2.92 mm female		1036.4790.00
Test port adapter, 2.92 mm male		1036.4802.00
Test port adapter, 18 GHz, type N female ²²		1036.4777.00
Matching pads, 50 Ω/75 Ω		
L section, matching at both ends	R&S®RAM	0358.5414.02
Series resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S®RAZ	0358.5714.02
Smart noise sources for noise figure and gain measurements (R&S®FPL1-K30 required)		
Smart noise source, 10 MHz to 18 GHz	R&S®FS-SNS18	1338.8008.18
Smart noise source, 10 MHz to 26.5 GHz	R&S®FS-SNS26	1338.8008.26
Probe adapters		
Type N adapter, for R&S®RT-Zxx oscilloscope probes (recommended for R&S®FPL1003, R&S®FPL1007 and R&S®FPL1014)	R&S®RT-ZA9	1417.0909.02
Type 3.5 mm (f) adapter, for R&S®RT-Zxx oscilloscope probes (recommended for R&S®FPL1026)	R&S®RT-ZA51	1803.5365.02
High-power attenuators		
Attenuator 100 W, 3/6/10/20/30 dB, 1 GHz	R&S®RBU100	1073.8495.xx (xx = 03/06/10/20/30)
Attenuator 50 W, 3/6/10/20/30 dB, 2 GHz	R&S®RBU50	1073.8695.xx (xx = 03/06/10/20/30)
Attenuator 50 W, 20 dB, 6 GHz	R&S®RDL50	1035.1700.52
Cables		
IEC/IEEE bus cable, length: 1 m	R&S®PCK	0292.2013.10
IEC/IEEE bus cable, length: 2 m	R&S®PCK	0292.2013.20
DC block		
DC block, 10 kHz to 18 GHz, type N	R&S®FSE-Z4	1084.7443.03

²⁰ R&S®FPL1-Z6B is available for instruments in the current corporate design color RAL 5000 (violet blue), while R&S®FPL1-Z6 is available for the legacy color RAL 5014 (pigeon blue).

²¹ R&S®FPL1-B5 option required.

²² The type N connector is only specified for frequencies up to 18 GHz. Degradations in expected performance may occur when using this adapter at higher frequencies.

Power sensors supported by the R&S®FPL1-K9 option ²³

Designation	Type	Order No.
Universal power sensors		
1 nW to 100 mW, 10 MHz to 8 GHz, two-path	R&S®NRP-Z211	1417.0409.02
200 pW to 200 mW, 10 MHz to 8 GHz ²⁴	R&S®NRP-Z11	1138.3004.02
1 nW to 100 mW, 10 MHz to 18 GHz, two-path	R&S®NRP-Z221	1417.0309.02
200 pW to 200 mW, 10 MHz to 18 GHz ²⁴	R&S®NRP-Z21	1137.6000.02
2 nW to 2 W, 10 MHz to 18 GHz ²⁴	R&S®NRP-Z22	1137.7506.02
20 nW to 15 W, 10 MHz to 18 GHz ²⁴	R&S®NRP-Z23	1137.8002.02
60 nW to 30 W, 10 MHz to 18 GHz ²⁴	R&S®NRP-Z24	1137.8502.02
Power sensor modules with power splitter		
4 µW to 400 mW, DC to 18 GHz	R&S®NRP-Z27	1169.4102.02
4 µW to 400 mW, DC to 26.5 GHz	R&S®NRP-Z37	1169.3206.02
Thermal power sensors		
300 nW to 100 mW, DC to 18 GHz	R&S®NRP18T	1424.6115.02
300 nW to 100 mW, DC to 18 GHz, LAN version	R&S®NRP18TN	1424.6121.02
300 nW to 100 mW, DC to 33 GHz	R&S®NRP33T	1424.6138.02
300 nW to 100 mW, DC to 33 GHz, LAN version	R&S®NRP33TN	1424.6144.02
300 nW to 100 mW, DC to 40 GHz	R&S®NRP40T	1424.6150.02
300 nW to 100 mW, DC to 40 GHz, LAN version	R&S®NRP40TN	1424.6167.02
300 nW to 100 mW, DC to 50 GHz	R&S®NRP50T	1424.6173.02
300 nW to 100 mW, DC to 50 GHz, LAN version	R&S®NRP50TN	1424.6180.02
300 nW to 100 mW, DC to 67 GHz	R&S®NRP67T	1424.6196.02
300 nW to 100 mW, DC to 67 GHz, LAN version	R&S®NRP67TN	1424.6209.02
300 nW to 100 mW, DC to 90 GHz	R&S®NRP90T	1424.6473.02
300 nW to 100 mW, DC to 90 GHz, LAN version	R&S®NRP90TN	1424.6480.02
300 nW to 100 mW, DC to 110 GHz	R&S®NRP110T	1424.6215.02
Average power sensors		
100 pW to 200 mW, 8 kHz to 6 GHz	R&S®NRP6A	1424.6796.02
100 pW to 200 mW, 8 kHz to 6 GHz, LAN version	R&S®NRP6AN	1424.6809.02
100 pW to 200 mW, 9 kHz to 6 GHz ²⁴	R&S®NRP-Z91	1168.8004.02
100 pW to 200 mW, 8 kHz to 18 GHz	R&S®NRP18A	1424.6815.02
100 pW to 200 mW, 8 kHz to 18 GHz, LAN version	R&S®NRP18AN	1424.6821.02
Three-path diode power sensors		
100 pW to 200 mW, 10 MHz to 8 GHz	R&S®NRP8S	1419.0006.02
100 pW to 200 mW, 10 MHz to 8 GHz, LAN version	R&S®NRP8SN	1419.0012.02
100 pW to 200 mW, 10 MHz to 18 GHz	R&S®NRP18S	1419.0029.02
100 pW to 200 mW, 10 MHz to 18 GHz, LAN version	R&S®NRP18SN	1419.0035.02
1 nW to 2 W, 10 MHz to 18 GHz	R&S®NRP18S-10	1424.6721.02
10 nW to 15 W, 10 MHz to 18 GHz	R&S®NRP18S-20	1424.6738.02
30 nW to 30 W, 10 MHz to 18 GHz	R&S®NRP18S-25	1424.6744.02
100 pW to 200 mW, 10 MHz to 33 GHz	R&S®NRP33S	1419.0064.02
100 pW to 200 mW, 10 MHz to 33 GHz, LAN version	R&S®NRP33SN	1419.0070.02
100 pW to 200 mW, 10 MHz to 33 GHz, LAN version, TVAC-compliant	R&S®NRP33SN-V	1419.0129.02
100 pW to 100 mW, 50 MHz to 40 GHz	R&S®NRP40S	1419.0041.02
100 pW to 100 mW, 50 MHz to 40 GHz, LAN version	R&S®NRP40SN	1419.0058.02
100 pW to 100 mW, 50 MHz to 50 GHz	R&S®NRP50S	1419.0087.02
100 pW to 100 mW, 50 MHz to 50 GHz, LAN version	R&S®NRP50SN	1419.0093.02
100 pW to 100 mW, 50 MHz to 67 GHz	R&S®NRP67S	1424.6396.02
100 pW to 100 mW, 50 MHz to 67 GHz, LAN version	R&S®NRP67SN	1424.6409.02
100 pW to 200 mW, 50 MHz to 67 GHz, LAN version, TVAC-compliant	R&S®NRP67SN-V	1424.6415.02
Wideband power sensors		
1 nW to 100 mW, 50 MHz to 18 GHz ²⁴	R&S®NRP-Z81	1137.9009.02
1 nW to 100 mW, 50 MHz to 40 GHz, 2.92 mm ²⁴	R&S®NRP-Z85	1411.7501.02
1 nW to 100 mW, 50 MHz to 40 GHz, 2.40 mm ²⁴	R&S®NRP-Z86	1417.0109.40
1 nW to 100 mW, 50 MHz to 44 GHz, 2.40 mm ²⁴	R&S®NRP-Z86	1417.0109.44

²³ For average power measurement only. LAN connection not supported.

²⁴ Product discontinued.

Warranty and service

Warranty		
Base unit		1 year
All other items		1 year
Service options		
	Service plans	On demand
Calibration	up to five years ²⁵	pay per calibration
Warranty and repair	up to five years ²⁵	standard price repair
Contact your Rohde & Schwarz sales office for further details.		

Intel, the Intel logo, and Intel Core are trademarks of Intel Corporation or its subsidiaries.

²⁵ For extended periods, contact your Rohde & Schwarz sales office.

Service at Rohde & Schwarz
You're in great hands

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

Rohde & Schwarz

The Rohde & Schwarz technology group is among the trailblazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks & cybersecurity. Founded more than 90 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

www.rohde-schwarz.com

Sustainable product design

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management
ISO 9001

Certified Environmental Management
ISO 14001

More Rohde & Schwarz certificates



Rohde & Schwarz training

www.training.rohde-schwarz.com

Rohde & Schwarz customer support

www.rohde-schwarz.com/support

