

Lighting Solutions

LED | Fluorescent | Halogen | Accessories




Richelieu



Lighting Solutions

Richelieu is a leading distributor, importer and manufacturer of specialty hardware with over 45 years of expertise. We offer more than 100,000 products, with numerous distribution centers across North America.

Our lighting specialists have created a complete program that responds to current client needs, the latest trends, and newest technological innovations in the industry.

For additional product information, visit the lighting section of our website. The site interface allows you to narrow your initial search via two of the most important lighting criteria: light type and installation location. Once you've made your selection, all the lights matching your criteria will be displayed on one single page, letting you compare products easily without having to open new windows!



Lighting Types

Table of Contents



LED SKATE 1.6 W	5	LED LINEA linear light 4.5 W or 10 W	21
LED KITE 1.6 W	6	LED LUMINO flexible tape light 12" – 2.4 W	22
LED GOCCIA closet rod	6	LED FLEXIBLE TAPE LIGHT ROLL 58 W total	22
LED LEAF for cabinets	7	RECESSED PROFILE for LED tape Light	23
LED LEAF for drawers	7	SURFACE MOUNTED PROFILE for LED tape Light	23
LED FOLIO simple 1 W	8	45° CORNER PROFILE for LED tape Light	23
LED FOLIO double 2.4 W	8	LED 3 NEW VISION 3 W	24
LED DIMODA display light, fixed straight light 3.6 W	9	LED PICCOLO linear light 2.8 W	25
LED DIMODA display light, focused light 1.2 W	9	LED FURNITURE LIGHT 2.2 W	25
LED DIMODA display light, cross bar 3.6 W	10	LED BEDLAMP with USB charge port 3 W	26
LED DIMODA display light, 90° angled arm 3.6 W	10	LED VERSO reading light 1 W	26
LED NOVA	11	LED PERNO "L" task light with built-in on/off occupancy sensor	27
LED METRIS recessed spotlight 1.7 W	12	LED PRIME office task light 7.5 W	27
LED SELF-ADHERING FLEXIBLE STRIP 0.8 W	12	LED PURE desk lamp 5 W	28
LED SPOT 1.6 W	13	LED INNOVAFLEX color changing 9.6 W	28
LED round (A) or square (B) surface-mounted spotlight 1.2 W	13	LED CONTROL 8.2 W	29
LED STICK2 1.6 W or 2.4 W	14	LED COLOR CHANGING FLEX TAPE LIGHT 2.8 W	30
LED TWINSTICK2 3 W or 4.4 W	14	LED FLEXIBLE TAPE LIGHT 2.8 W	30
LED LPAD 7.5 W	15	LED ERA 5 W	31
LED QPAD 7.5 W	15	LED STELLAR 8 W	31
LED PRO 3 W	16	LED VEGA lithium powered rechargeable cabinet light 1.6 W	32
LED INVOKE with tilt and swivel 3 W	17	LED PUCK LIGHT 0.14 W	32
LED INVOKE 3 W	17	LED FARO drawer light 0.5 W	33
LED PIXEL OB® 1.2 W	18	LED DRAWER LIGHT 0.27 W	33
LED NET SP® 1.2 W	18	LED PILA wireless lighting 2 W or 7.2 W	34
LED CUBIK 1.2 W	19	LED CLOSET ROD 1.2 W	34
LED SHINE 1.2 W	19	LED H2O pull/hook light 3.4 W	35
LED BIG 6 TWO 7.2 W	20	LED LAIN pull/hook light 3.4 W	35
LED HIGH-OUTPUT recessed 3 W	20	LED DURO XS portable hands-free light 1.6 W	36



FLUORESCENT PROFILO lighted shelf	37	T5 FLUORESCENT TAZETTA	42
T5 FLUORESCENT grounded	38	T5 FLUORESCENT PERNO black	42
T5 FLUORESCENT grounded with switch	38	T5 FLUORESCENT PERNO	43
T5 FLUORESCENT SLIMLITE XL	39	T5 FLUORESCENT PERNO with occupancy sensor	43
T4 FLUORESCENT SLIMLITE	39	T4 FLUORESCENT	44
T5 FLUORESCENT SOLUTION	40	T4 FLUORESCENT black	44
T5 FLUORESCENT	41		



HALOGEN triangular 20 W	45	HALOGEN recessed 50 W (ceiling)	50
HALOGEN recessed or surface-mounted 20 W	46	HALOGEN recessed 50 W (ceiling)	51
HALOGEN recessed 10 W or 20 W	46	HALOGEN recessed and swivel 50 W (ceiling)	51
HALOGEN puck light 20 W	47	HALOGENS recessed 50 W (ceiling)	52
HALOGEN recessed and swivel 50 W (ceiling)	48	HALOGEN recessed or surface-mounted 20 W	52
HALOGEN recessed 50 W (ceiling)	48	HALOGEN recessed 20 W	53
HALOGEN recessed shower trim 50 W (ceiling)	49	HALOGEN recessed with swivel 20 W or 50 W	53



LED A GROUP	54	HALOGEN A GROUP	57
LED B GROUP	54	HALOGEN B GROUP	57
LED C GROUP	54	HALOGEN C GROUP	57
LED D GROUP	54	HALOGEN D GROUP	57
LED E GROUP	55	HALOGEN E GROUP	57
LED F GROUP	55	SWITCHES AND DIMMERS	58
LED G GROUP	56	OUTLETS AND SWITCHES	59
LED H GROUP	56	WIRE MANAGEMENT	59
LED I GROUP	56	COMMUNICATION AND POWER ACCESS BOXES	60
LED J GROUP	56	DISPLAYS	60

Lighting Solutions

Categories



RECESSED Kitchen & Furniture

LED or halogen recessed lights can be mounted under or inside cabinets, or surface-mounted using a trim ring. Versatile and easy to install with a quick-connect feature, they're the perfect lighting solution for all your design plans!



SURFACE

Surface-mounted products are a quick and easy way to make rooms more dramatic and increase visual interest. They can be integrated into decorating plans to spotlight paintings or sculptures, light cabinet doors, or illuminate kitchen toe kicks or backsplashes.



LINEAR

Linear lighting is often used as task lighting for kitchen countertops, or used commercially in displays. Richelieu's selection makes linear lighting installation easy: you can choose between LED or fluorescent solutions. Linear task lighting is a great way to light up small spaces without losing precious counter space.



RECESSED Ceiling

Recessed ceiling lighting lets you brighten dark areas, emphasize works of art, light up your kitchen or give any room its own unique atmosphere. With a variety of trim finishes and sizes, Richelieu's recessed lighting is easy to incorporate into designs and just as simple to install!



FURNITURE & CLOSET

Make your furniture & closets unique with Richelieu's lighting solutions. When accent lighting is added to a bookcase, home theatre or armoire, it adds value to the piece and drama to the room, creating visual interest.



OFFICE & COMMERCIAL

LED & Fluorescents are chosen for their energy efficiency and high light output coupled with their long lasting lives. Compact T5 LED & fluorescent solutions make the installation of task, display and retail lighting the easiest of all lighting options.



LED

Required: LED power supply: **51215** (15W max.) or **51230** (30W max.)



Lighting Solutions LED

A LED (light-emitting diode) offers consistent color quality and no UV light, so it won't fade product. It is ideal for accent lighting in furniture, cabinets and displays, where light is required in tight spaces. When the power to a LED is converted into light, minimal heat is produced which makes them an especially safe light source in any environment. LED lights have a remarkable long life due to the fact that they do not use bulbs; there is an electronic component that emits its highest light output for up to 50,000 hours. With a lower consumption per watt, available and neutral LED lights are at the cutting edge of lighting technology and the ideal solution for all commercial designs!



- 1.6W
- 50,000 h
- 2 1/8" (54 mm)
- 5 15/16" (150 mm)
- 2 5/8" (67 mm)



LED SKATE 1.6W

New LED lighting model created by Giuseppe Bavuso.

- + Master lights include a built-in touch LED switch to control on/off and the intensity of all the other lights
- + One master light can control up to 8 slave lights (with 15W max. power supply) or 17 slave lights (with 30W max. power supply)



Each unit includes a 78" cable for connection to power supply.

Product	Light	Description	Finish
109122030	warm white	master, touch function	white
109124030	neutral white	master, touch function	white
119122030	warm white	slave, without touch function	white
119124030	neutral white	slave, without touch function	white

REQUIRED LED power supply: **51215** (15W max.) or **51230** (30W max.)

OPTIONAL 51278 LED 78" connecting cable

See accessories p. 54 to 60.

LED

Richelieu
richelieu.com

A
GROUP

Required: LED power supply: **51215** (15W max.) or **51230** (30W max.)



- 1.6W
- 50,000 h
- 2 1/2" (64 mm)
- 5 15/16" (150 mm)
- 2 3/4" (70 mm)

LED KITE 1.6W

New LED lighting model created by Giuseppe Bavuso.

- + Master lights include a built-in touch LED switch to control on/off and the intensity of all the other lights.
- + One master light can control up to 8 slave lights (with 15W max. power supply) or 17 slave lights (with 30W max. power supply)

Each unit includes a 78" cable for connection to power supply.



Product	Light	Description	Finish
108122010	warm white	master, touch function	aluminum
108124010	neutral white	master, touch function	aluminum
118122010	warm white	slave, without touch function	aluminum
118124010	neutral white	slave, without touch function	aluminum



- 2.88W, 3.84W, 4.56W or 6W
- 50,000 h
- 11/16" (18 mm)
- 2 15/16" (75 mm)

LED GOCCIA closet rod

Richelieu's new LED closet rod designed by Giuseppe Bavuso: he maintained the following three points during this unique creation: technology, creativity and energy saving.

- + Motion detector built into each fixture

Includes a 78" Quick connect cable to connect between LED and power supply.



Product	Light	Length/W	Finish
10880229	cool white	29 1/8" / 2.88W	aluminum
10880335	cool white	35 7/16" / 3.84W	aluminum
10880441	cool white	41 3/4" / 4.56W	aluminum
10880554	cool white	54 5/16" / 6W	aluminum


REQUIRED LED power supply: **51215** (15W max.) or **51230** (30W max.)

OPTIONAL 51278 LED 78" connecting cable



LED

Required: LED power supply: **51215** (15W max.) or **51230** (30W max.)

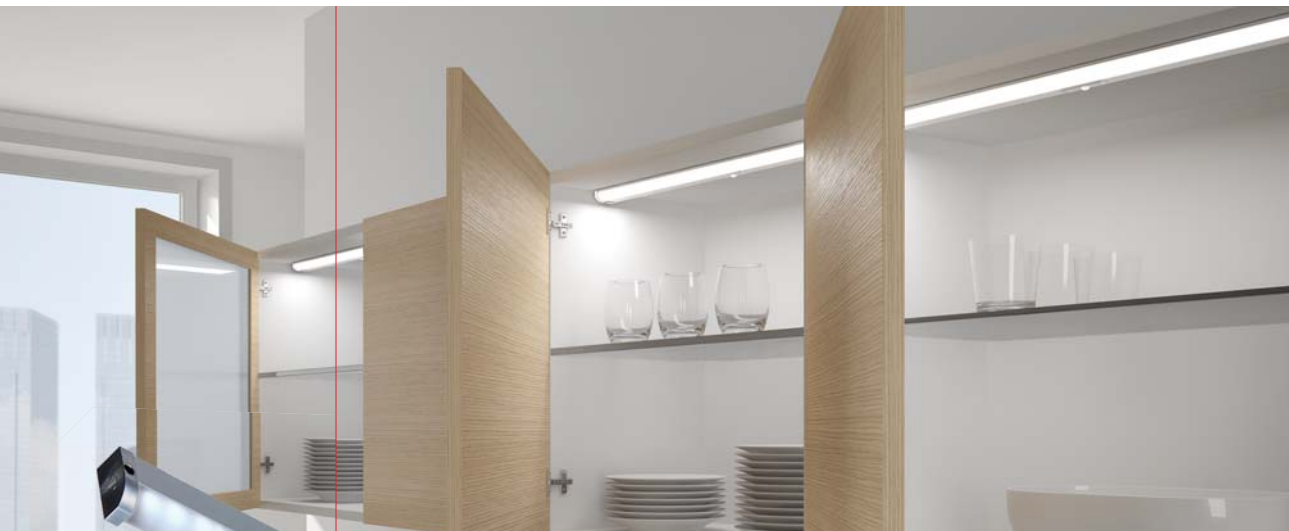

1.92W, 2.61W, 4.08W or 5.92W

50,000 h

1 7/16" (37 mm)

11/16" (17 mm)



LED LEAF for cabinets

LED Leaf is perfectly designed for inside cabinet applications. Equipped with an electronic presence sensor, the sensor detects when doors are open lighting immediately. When the door is closed, it will wait for 30 sec. before automatically shutting off.

+ Made in Italy exclusively for Richelieu

Product	Light	Length/W	Finish
108120410	neutral white	16.1"/1.92W	aluminum
108120560	neutral white	22"/2.64W	aluminum
108120860	neutral white	33.8"/4.08W	aluminum
108121160	neutral white	45.7"/5.52W	aluminum



2.88W, 3.84W, 4.56W or 6W

50,000 h

1 7/16" (37 mm)

11/16" (17 mm)



LED LEAF for drawers

This light is designed for inside drawer application and is equipped with an electronic limit sensor.

+ Made in Italy exclusively for Richelieu

Product	Light	Length/W	Finish
108120450	neutral white	17.7"/1.68W	aluminum
108120600	neutral white	23.6"/2.4W	aluminum
108120900	neutral white	35.4"/3.84W	aluminum
108121200	neutral white	47.2"/5.28W	aluminum

REQUIRED LED power supply: **51215** (15W max.) or **51230** (30W max.)

OPTIONAL 51278 LED 78" connecting cable

See accessories p. 54 to 60.

LED

Richelieu
richelieu.com

A
GROUP



- 1W
- 50,000 h
- 9" (229 mm)
- 2 3/16" (56 mm)
-

LED FOLIO simple 1W

Enjoy the new designs in surface-mounted lighting at Richelieu. LED FOLIO highlights kitchen cabinet doors, displays or shelves.

+ Made in Italy exclusively for Richelieu

Each unit includes a 78" cable for connection to power supply.

Product	Light	Length/W	Finish
1081220109	warm white	9 1/16" / 1W	aluminum
1081240109	neutral white	9 1/16" / 1W	aluminum



- 2.4W
- 50,000 h
- 22" (559 mm)
- 2 3/16" (56 mm)
-

LED FOLIO double 2.4W

Enjoy the new designs in surface-mounted lighting at Richelieu. LED FOLIO highlights kitchen cabinet doors, displays or shelves.

+ Made in Italy exclusively for Richelieu

Each unit includes a 78" cable for connection to power supply.

Product	Light	Length/W	Finish
1081220222	warm white	22 1/16" / 2.4W	aluminum
1081240222	neutral white	22 1/16" / 2.4W	aluminum

REQUIRED LED power supply: **51215** (15W max.) or **51230** (30W max.)

OPTIONAL 51278 LED 78" connecting cable



LED

Required: LED power supply: **51215** (15W max.) or **51230** (30W max.)



- 3.6W
- 50,000 h
- 1 3/8" (35 mm)
- 11 1/32" (280 mm)
-
-

LED DIMODA display light, fixed straight light 3.6 W

LED DiModa is a collection of lights designed specifically for display cases. A swivel feature allows the light to be repositioned exactly where you need it!

- + Aluminum casing
- + Low power consumption

Product	Light	Finish
5121512415	Neutral White	Chrome



Includes 9 LED extra bright 5630, 78" quick-connect cable with a plug for connections between LED lights and power supply (power bloc sold separately: **51215** or **51230**).



- 1.2W
- 50,000 h
- 1 3/8" (35 mm)
- 9 7/16" (240 mm)
-
-

LED DIMODA display light, focused light 1.2 W

LED DiModa is a collection of lights designed specifically for display cases. A swivel feature allows the light to be repositioned exactly where you need it!

- + Aluminum casing
- + Low power consumption

Product	Light	Finish
5121512413	Neutral White	Chrome



Includes 3 LED extra bright 5630, 78" quick-connect cable with a plug for connections between LED lights and power supply (power bloc sold separately: **51215** or **51230**).

REQUIRED LED power supply: **51215** (15W max.) or **51230** (30W max.)

OPTIONAL **51278** LED 78" connecting cable



LED

Required: LED power supply: **51215** (15W max.) or **51230** (30W max.)



- 3.6W
- 50,000 h
- 9 7/16" (240 mm)
- 11 1/32" (280 mm)
-
-

LED DIMODA display light, cross bar 3.6 W

LED DiModa is a collection of lights designed specifically for display cases. A swivel feature allows the light to be repositioned exactly where you need it!

- + Aluminum casing
- + Low power consumption



Includes 9 LED extra bright 5630, 78" quick-connect cable with a plug for connections between LED lights and power supply.

Product	Light	Finish
5121512416	Neutral White	Chrome



- 3.6W
- 50,000 h
- 1 3/8" (35 mm)
- 15 13/16" (402 mm)
-
-

LED DIMODA display light, 90° angled arm 3.6 W

LED DiModa is a collection of lights designed specifically for display cases. A swivel feature allows the light to be repositioned exactly where you need it!

- + Aluminum casing
- + Low power consumption



Includes 9 LED extra bright 5630, 78" quick-connect cable with a plug for connections between LED lights and power supply.

Product	Light	Finish
5121512414	Neutral White	Chrome

REQUIRED LED power supply: **51215** (15W max.) or **51230** (30W max.)

OPTIONAL **51278** LED 78" connecting cable






LED

Required: LED power cord: 4511240070 (70")



 4W, 8W, 14W or 18W

 50,000 h

 7/8" (22 mm)

 1 5/8" (41 mm)



LED NOVA

Richelieu's New Nova is an LED light encased in the standard T5 housing.

+ Built-in constant-current drive



Includes one fixture, 4,100° K T5 housing, Plexiglas, hardware mounting kit (plastic clips & direct connector), and a convenient on/off switch located on the fixture.

Product	Light	Length/W	Finish
4511240413	neutral white	13" / 4W	white
4511240823	neutral white	24" / 8W	white
4511241435	neutral white	35" / 14W	white
4511241847	neutral white	47" / 18W	white

REQUIRED LED power cord 4511240070 (70")

OPTIONAL LED connecting cable: 4511240006 (6"), 4511240012 (12"), 4511240020 (20"), 4511240040 (40")

See accessories p. 54 to 60.

LED

Richelieu
richelieu.com

B
GROUP


Required: LED power supply: **30624** (6W max.), **32524** (30W max.) or **37524** (75W max.)










LED METRIS recessed spotlight 1.7W

An outstanding spotlight with 24 LEDs and performing optics (400 lux).

+ Easy to install

 Includes a 79" Quick connect cable to connect between LED lights and power supply.

-  1,7W
-  50 000 h
-  2 11/16" (68 mm)
-  5/16" (8 mm)
-  2 1/4" (57 mm)
-  








Product	Light	Finish
159121010	cool white	aluminum
159122010	warm white	aluminum



LED SELF-ADHERING FLEXIBLE STRIP 0.8W

Use as an accent light for kitchens, furniture and displays.

- + Illuminates without emitting heat
- + Extremely small dimensions

-  0,8W
-  30,000 h
-  5/16" (8 mm)
-  1/8" (3 mm)
-   

Product	Light	Length	Finish
612121	neutral white	12"	white
612122	warm white	12"	white

REQUIRED FOR LED SELF ADHERING TAPE LIGHT 612098 98" LED power cord
OPTIONAL FOR LED SELF ADHERING TAPE LIGHT 612002 2" LED connecting cable

REQUIRED LED power supply: **30624** (6W max.), **32524** (30W max.) or **37524** (75W max.)
OPTIONAL **310127889** Remote control dimmer, **310127899** Motion activation switch, **310127880** Dimmer, **310127000** Terminal block, **310127888** Rotary dimmer, **310127898** 98" connecting cable



LED

Required: LED power supply: **30624** (6W max. DO NOT USE with LED LPad et QPad), **32524** (30W max.) or **37524** (75W max.)



LED SPOT 1.6W

This German made LED spotlight features the latest generation of high and even light output LEDs.

+ Spotlight can be surface mounted with the use of the provided trim ring or recessed with a depth of 5/8" (16 mm)



Includes trim ring for surface mounting, a 72" Quick connect cable with plug for connections between LED lights and power supply.

- 1.6W
- 50,000 h
- 2 5/8" (67 mm)
- 5/8" (16 mm)
- 2 1/8" (54 mm)
-
-
-

Product	Light	Finish
101121170	cool white	stainless
101122170	warm white	stainless



A



B

LED round (A) or square (B) surface-mounted spotlight 1.2W

High quality spotlight.

+ Easy to install



Includes a 98" Quick connect cable to connect between LED and power supply.

- 1.2W
- 30,000 h
- (A) 3" (76 mm)
- (B) 2 5/8" (67 mm)
- (A) 5/16" (8 mm)
- (B) 3/8" (10 mm)
-
-
-

	Product	Light	Finish
A	314121170	cool white	silver
	314122170	warm white	silver
B	313121170	cool white	silver
	313122170	warm white	silver

REQUIRED LED power supply: **30624** (6W max. DO NOT USE with LED LPad et QPad), **32524** (30W max.) or **37524** (75W max.)

OPTIONAL **310127889** Remote control dimmer, **310127899** Motion activation switch, **310127880** Dimmer, **310127000** Terminal block, **310127888** Rotary dimmer, **310127898** 98" connecting cable



- 1.6W or 2.4W
- 50,000 h
- 3/8" (10 mm)
- 5/16" (8 mm)
-



LED STICK2 1.6W or 2.4W

Stick2® has now eliminated any dark spots from your linear LED lighting solution.

REQUIRED FOR LED STICK2 3131298 LED power cable 98"

OPTIONAL FOR LED STICK2 LED connecting cable: 3131201 (1"), 3131212 (12"), ou 3131239 (39")

Product	Light	Length/W	Finish
3131220108	warm white	8" / 1.6W	aluminum
3131240108	neutral white	8" / 1.6W	aluminum
3131220212	warm white	12" / 2.4W	aluminum
3131240212	neutral white	12" / 2.4W	aluminum
3131222412	warm white	12" / 2.4W	aluminum
3131242412	neutral white	12" / 2.4W	aluminum

Power cable included.



- 3W or 4.4W
- 50,000 h
- 2 1/2" (64 mm)
- 2 3/4" (70 mm)
-



LED TWINSTICK2 3W or 4.4W

Extremely high light output, similar to T5 fluorescent light fixtures.

REQUIRED FOR LED TWINSTICK2 3221298 98" LED power cable

OPTIONAL FOR LED TWINSTICK2 LED connecting cable: 3221201 (1"), 3221212 (12"), ou 3221239 (39")

Product	Light	Length/W	Finish
3221220308	warm white	8" / 3W	aluminum
3221240308	neutral white	8" / 3W	aluminum
3221220412	warm white	12" / 4.4W	aluminum
3221240412	neutral white	12" / 4.4W	aluminum
3221224412	warm white	12" / 4.4W	aluminum
3221244412	neutral white	12" / 4.4W	aluminum

Power cable included.

REQUIRED LED power supply: **30624** (6W max. DO NOT USE with LED LPad et QPad), **32524** (30W max.) or **37524** (75W max.)

OPTIONAL 310127889 Remote control dimmer, 310127899 Motion activation switch, 310127880 Dimmer, 310127000 Terminal block, 310127888 Rotary dimmer, 310127898 98" connecting cable



LED

Required: LED power supply: **32524** (30W max.) or **37524** (75W max.)



LED LPAD 7.5W

Designed and made in Germany.

+ Pure and elegant design, winner of the *Red Dot Design Award*



Includes a 96" Quick connect cable with a plug for connections between LED lights and power supply.

7.5W

30,000 h

3-1/2" (89 mm)

6-5/8" (168 mm)

7/16" (11 mm)



Black	Stainless	Light
317121090	317121170	cool white
317122090	317122170	warm white
377121090	377121170	cool white
377122090	377122170	warm white

With integrated touchless IR switch



LED QPAD 7.5W

Designed and made in Germany.

+ Pure and elegant design, winner of the *Red Dot Design Award*



Includes a 96" Quick connect cable with a plug for connections between LED lights and power supply.

7.5W

30,000 h

3-1/2" (89 mm)

4" (102 mm)

7/16" (11 mm)



Black	Stainless	Light
316121090	316121170	cool white
316122090	316122170	warm white

REQUIRED LED power supply: **32524** (30W max.) or **37524** (75W max.)

OPTIONAL **310127889** Remote control dimmer, **310127899** Motion activation switch, **310127880** Dimmer, **310127000** Terminal block, **310127888** Rotary dimmer, **310127898** 98" connecting cable



LED

Required: LED power supply: **8990** (9W max.), **1551218** (18W max.), **1551018** (18W max. with integrated passive IR sensor), **1551170** (18W max. with dimmer) or **1551090** (18W max. with infrared IR sensor)



LED PRO 3W


New High Powered 3W Square LED Light with solid aluminum housing.

+ Frosted glass lens

OPTIONAL FOR LED PRO 15662170 Trim ring for surface mounting



Includes a 59" Quick connect cable with plug for connections between LED lights and power supply.



Product	Light	Finish
156121170	cool white	brushed nickel
156122170	warm white	brushed nickel

REQUIRED LED power supply: **8990** (9W max.), **1551218** (18W max.), **1551018** (18W max. with integrated passive IR sensor), **1551170** (18W max. with dimmer) or **1551090** (18W max. with infrared IR sensor)

OPTIONAL LED connecting cable: **899040** (40") or **899079** (79")



LED

Required: LED power supply: **8990** (9W max.), **1551218** (18W max.), **1551018** (18W max. with integrated passive IR sensor), **1551170** (18W max. with dimmer) or **1551090** (18W max. with infrared IR sensor)



- 3W
- 50,000 h
- 2 5/16" (59 mm)
- 1 1/2" (38 mm)
- 1 7/8" (48 mm)
- 20°



LED INVOKE with tilt and swivel 3W

New high powered 3W LED light with solid aluminum housing.

+ 20° swivel with 40° light beam

Includes a 59" Quick connect cable to connect between LED lights and power supply.

Product	Light	Finish
154121170	cool white	brushed nickel
154122170	warm white	brushed nickel



- 3W
- 50,000 h
- 2 5/16" (59 mm)
- 5/8" (16 mm)
- 1 7/8" (48 mm)



LED INVOKE 3W

New high powered 3W LED light with solid aluminum housing.

+ Frosted glass lens

OPTIONAL FOR LED INVOKE Trim ring for surface mounting: **15552170** (aluminum), **15552090** (black), **15513170** (triangle) or **15514170** (20°)

Includes a 59" Quick connect cable to connect between LED lights and power supply.

Product	Light	Finish
155121090	cool white	black
155122090	warm white	black
155121170	cool white	stainless
155122170	warm white	stainless

REQUIRED LED power supply: **8990** (9W max.), **1551218** (18W max.), **1551018** (18W max. with integrated passive IR sensor), **1551170** (18W max. with dimmer) or **1551090** (18W max. with infrared IR sensor)

OPTIONAL LED connecting cable: **899040** (40") or **899079** (79")

Required: LED power supply: **7779** (10W max.) or **7890** (10W max. to be used with dimmer)



LED PIXEL OB® 1.2W

Free and functional are two key words used to describe the potential of Pixel OB®. The 20° angle of the Pixel OB® trim ring allows for installation under a cabinet close to the wall for perfect illumination of the kitchen countertop.

Includes a 79" Quick connect cable with plug for connections between LED lights and power supply, and a trim ring for surface mounting.

- 1.2W
- 50,000 h
- 1 3/8" (35 mm)
- 1 1/8" (29 mm)
- 1 3/16" (30 mm)
-

Product	Light	Finish
457121140	cool white	chrome
457122140	warm white	chrome
457121185	cool white	satin nickel
457122185	warm white	satin nickel



LED NET SP® 1.2W

The square body with slightly rounded corners makes the Net SP® essential and elegant.

Includes a 79" Quick connect cable with plug for connections between LED lights and power supply, and a trim ring for surface mounting.

- 1.2W
- 50,000 h
- 1 3/8" (35 mm)
- 5/8" (16 mm)
- 1 3/8" (35 mm)
-

Product	Light	Finish
455121010	cool white	aluminum
455122010	warm white	aluminum

REQUIRED LED power supply: **7779** (10W max.) or **7890** (10W max. to be used with dimmer)

OPTIONAL Dimmer: **788170** or **788140** and LED connecting cable: **78940** (40") or **78978** (78")



LED

Required: LED power supply: **7779** (10W max.) or **7890** (10W max. to be used with dimmer)



LED CUBIK 1.2W

The uniquely angled stainless steel body allows for installation under a cabinet close to the wall for perfect and uniform illumination of the kitchen countertop.



Includes a 79" Quick connect cable to connect between LED lights and power supply.

1.2W

50,000 h

2 1/16"
(52 mm)

2 1/8"
(54 mm)



Product	Light	Finish
460121170	cool white	stainless
460122170	warm white	stainless



LED SHINE 1.2W

Shine® is characterized by a clean round casing, and uses an innovative high-quality LED for efficient, high-performance lighting. The small size of this spotlight provides maximum freedom of application.

+ Can be installed surface-mounted on already existing furniture without the need for drilling



Includes a 79" Quick connect cable to connect between LED lights and power supply.

1.2W

50,000 h

1 9/16"
(40 mm)

3/8"
(10 mm)



Product	Light	Finish
456121140	cool white	chrome
456122140	warm white	chrome

REQUIRED LED power supply: **7779** (10W max.) or **7890** (10W max. to be used with dimmer)

OPTIONAL Dimmer: **788170** or **788140** and LED connecting cable: **78940** (40") or **78978** (78")



LED

Required: LED power supply: **7880** (9W max.), **78818** (18W max.), or **788D18** (18W max.) to be used with dimmer



- 7.2W
- 50,000 h
- 3 15/16" (100 mm)
- 2 1/2" (64 mm)
- 3 5/8" (92 mm)
-
-

LED BIG 6 TWO 7.2W

Developed especially for applications where high light levels of light are necessary or desired.

Includes 79" connecting cable.

Product	Light	Finish
366121170	cool white	stainless
366122170	warm white	stainless



- 3W
- 50,000 h
- 2 11/16" (68 mm)
- 1 5/16" (33 mm)
- 2 3/4" (70 mm)
- 20°
-
-
-

LED HIGH-OUTPUT recessed 3W

This fixture was intended for installation in locations where high levels of light are desired.

+ LED fixture with only 3W consumption (3 x 1 W LED) with extremely low heat emission

Includes a 79" Quick connect cable to connect between LED lights and power supply.

Product	Light	Finish
201121170	cool white	stainless
201122170	warm white	stainless

REQUIRED LED power supply: **7880** (9W max.), **78818** (18W max.) or **788D18** (18W max.) to be used with dimmer

OPTIONAL LED connecting cable: **76636** (36") or **76672** (72")





LED

Required: LED power supply: **2652412** (12 W max.), **2651236** (36W max.) or **2651260** (60 W max.)



4.5W or 10W

50,000 h

3/4" (19 mm)

1/2" (13 mm)



LED LINEA linear light 4.5W or 10W

Install in seconds with the easy mounting clips or powerful magnet both included with each strip. Sold in lengths of 8' and includes the opal lens cover

+ High intensity 120° beam angle



Includes mounting kit N° **2651200**: clips & screws, magnet, 6" Connecting cable and direct connector.

Product	Product	Product	Light	Length/W	Finish
2661220412	2651220412	2641220412	warm white	12" / 4.5W	white
2661240412	2651240412	2641240412	neutral white	12" / 4.5W	white
2661221024	2651221024	2641221024	warm white	24" / 10W	white
2661241024	2651241024	2641241024	neutral white	24" / 10W	white

OPTIONAL FOR LED LINEA

LED connecting cable: **2651201** (2"), **2651212** (12"), **2651240** (40") or **2651279** (79"), Power cord extension: **26512712** (12") or **26512736** (36"), **2651270306** 3-way splitter, **2651245** 45° metal clips, **2651200** Hardware mounting kit

REQUIRED LED power supply: **2652412** (12W max.), **2651236** (36W max.) or **2651260** (60W max.)



LED

Required: LED power supply: 2652412 (12 W max.), 2651236 (36 W max.) or 2651260 (60 W max.)



- 2.4W
- 50,000 h
- 3/8" (10 mm)
- 5/32" (4 mm)
-

LED LUMINO flexible tape light 12" – 2.4 W

The LED flexible tape light offers easy installation for all your lighting needs. Flexible mounting creates straight lines and allows for installation in and around curves and angles. Sold in 12" increments that can be cut in half.


REQUIRED FOR LED LUMINO

LED power cord:
71242090 (20" black)
71244090 (40" black)
71247990 (79" black)
71242030 (20" white)
71244030 (40" white)
71247930 (79" white)

OPTIONAL FOR LED LUMINO

"L" connector:
712L121 cool white
712L124 neutral white
712L122 warm white.
 "T" connector:
712T121 cool white
712T124 neutral white
712T122 warm white.
 "X" connector:
712X121 cool white
712X124 neutral white
712X122 warm white.
 Connecting cable:
71202090 (20" black)
71204090 (40" black)
71207990 (79" black)
71202030 (20" white)
71204030 (40" white),
71207930 (79" white),
71247030 4 level dimming control unit for tape light

Product	Light	Finish
712121	cool white	white
712122	warm white	white
712124	neutral white	white

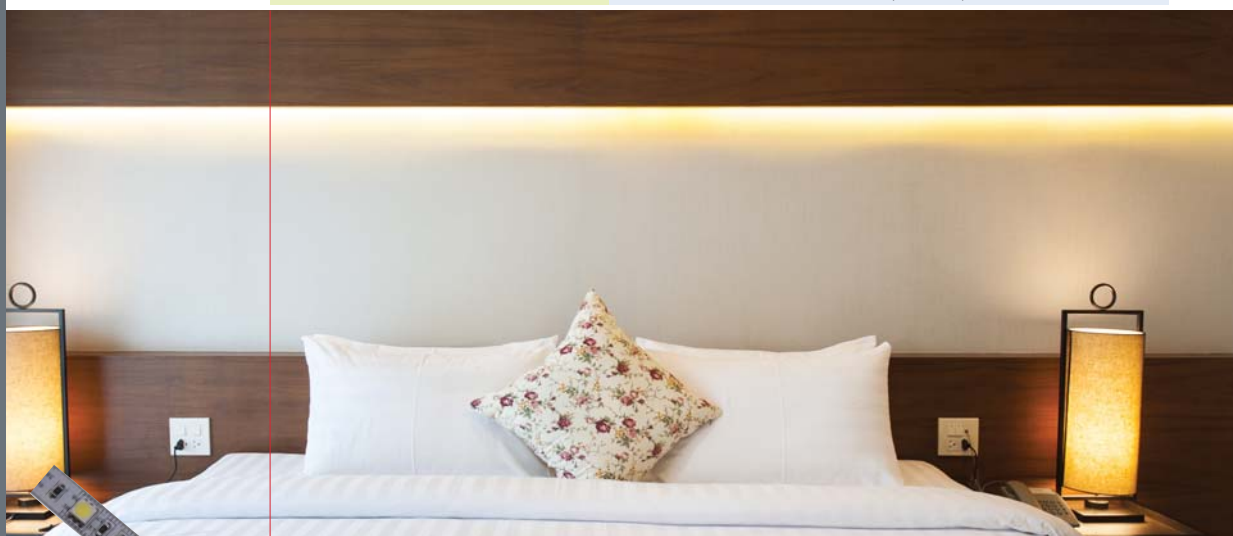

- 58 W
- 50,000 h
- 3/8" (10 mm)
-

LED FLEXIBLE TAPE LIGHT ROLL 58W total

Practical! This tape light can be cut every 10cm (3.94") or after every 6th LED.

- + 13' long (4 m), 14.4W per meter (3')
- + Requires power cord if you are cutting the tape light roll to start a NEW run

REQUIRED FOR FLEXIBLE TAPE LIGHT ROLL

Quick connect power cord:
5042090 (20" black) **5042030** (20" white)
5044090 (40" black) **5044030** (40" white)
5047990 (79" black) **5047930** (79" white)

OPTIONAL FOR FLEXIBLE TAPE LIGHT ROLL

Quick Connect Connecting Cable:
504602 (2"), **504620** (20"), **504640** (40") or
504679 (79"), **504600** Direct quick connect (white only),
71247030 4-step touch dimmer

Product	Light	Finish
50460121	cool white	white
50460122	warm white	white
50460124	neutral white	white


Includes one power cord starter lead with each roll.

REQUIRED LED power supply: 2652412 (12 W max.), 2651236 (36 W max.) or 2651260 (60 W max.)



LED

Required: LED power supply: **2652412** (12 W max.), **2651236** (36W max.) or **2651260** (60 W max.)



RECESSED PROFILE for LED tape Light


Richelieu new aluminum profile recessed solution fits tape light and tape light rolls.

- + Designed for installation under cabinets or within furniture
- + Can be cut easily with a miter saw

Product	Lenght	Finish
30145300	8' (2.43 m)	Aluminum



Includes one 8' aluminum profile with lens cover.



SURFACE MOUNTED PROFILE for LED tape Light

- + Mounting brackets and end caps sold separately
- + 45° mounting hardware solution available separately

Product	Lenght	Finish
30141210	8' (2.43 m)	Aluminum

Includes one 8' aluminum profile with lens cover.

45° CORNER PROFILE for LED tape Light

Light up the corners in cabinets, closets, behind cabinets and anywhere where you need angled lighting.

- + Mounting brackets and end caps sold separately
- + 45° light beam allows for light to be directed away from eyes

Product	Lenght	Finish
30142010	8' (2.43 m)	Aluminum

Includes one 8' aluminum profile with lens cover.



REQUIRED LED power supply: **2652412** (12W max.), **2651236** (36W max.) or **2651260** (60W max.)

OPTIONAL FOR PROFILES 30141270 End caps (8), **30141280** Mounting hardware, **30141283** 45° Angled mounting brackets



LED

Required: LED power supply: 71550 (18W max.)





LED 3 NEW VISION 3W

The only solution you need for any and every application. Switch with ease from cool white to neutral white to warm white with one touch! Frosted glass cover with inside glossy aluminum reflector.

+ High-quality CREE LED



Includes a 59" Quick connect cable to connect between LED lights and power supply.



Product Finish
155123170 aluminum

REQUIRED LED power supply: 71550 (18W max.)

OPTIONAL LED connecting cable: 7155040 (40") or 7155079 (79")



LED

Required: LED power supply: 1452412 (24 W max.)



LED PICCOLO linear light 2.8W

A new easy-to-install light will set your designs apart, letting you lead the pack!

+ Extremely small dimensions

REQUIRED FOR LED PICCOLO



98" LED power cord
33012098



Includes mounting kit
N° 33012000.

OPTIONAL FOR LED PICCOLO

LED connecting cable:
33012001 (1"), 33012020 (20"),
33012040 (40"), 33012079 (79").
31225 On/Off rocker switch.



Product	Light	Length/W	Finish
3301220106	warm white	6" / 1 W	aluminum
3301240106	neutral white	6" / 1 W	aluminum
3301220208	warm white	8" / 1.5 W	aluminum
3301240208	neutral white	8" / 1.5 W	aluminum
3301220212	warm white	12" / 2.8 W	aluminum
3301240212	neutral white	12" / 2.8 W	aluminum



LED FURNITURE LIGHT 2.2W




Make your furniture unique with Richelieu's New 2.2W LED Furniture puck light!

+ Connect up to 10 lights inline on one power supply

OPTIONAL FOR LED FURNITURE LIGHT LED connecting cable:
14512 (12"), 14540 (40") or 14579 (79"). 31225 On/Off switch.



Includes a 12" Quick connect cable with plug for connections between
LED lights and power supply.



Product	Light	Finish
145121090	neutral white	black
145122090	warm white	black
145121195	neutral white	satın nickel
145122195	warm white	satın nickel

REQUIRED LED power supply: 1452412 (24W max.)



LED

Kits



- 3W
- 50,000 h
- 18 1/2" (470 mm)
- 1 5/8" (41 mm)



LED BEDLAMP with USB charge port 3W

A great item that can be easily attached with just two screws to bedroom furniture, hospitality furniture and even work stations!

- + USB charge port: 5V, 1 amp.
- + On/lo/hi/off integrated switch on base



Kit includes 12V/DC power supply, USB charge port: 5V, 1 amp., 25" female primary cord from light with quick connect, power supply with 25" secondary cord to connect to light with male quick connect and 110" power cord.

Product	Light	Finish
110122185	warm white	Aluminum



- 1W
- 50,000 h
- 4 1/2" (114 mm)
- 3 1/2" (89 mm)
- 180°



LED VERSO reading light 1W

Add a touch of elegance & functionality to any headboard or other location where directional and focused lighting is needed with Richelieu's 1W LED Verso light.

- + One quality CREE LED at 1W only!
- + High-intensity 30° beam angle



Kit includes black on/off switch located on the light for convenience, 8' long power cord with detachable plug for easy installation and minimal bore hole size and power supply.

Product	Light	Finish
110122010	warm white	brushed nickel
110124010	neutral white	brushed nickel



KITS



LED

Kits



6W, 8W,
14W or 18W

50,000 h

1 3/32"
(28mm)



LED PERNO "L" task light with built-in on/off occupancy sensor

Introducing Richelieu's Perno "L" with all the same features and benefits as the Perno, but now in LED format.

- + Built-in occupancy sensor option, preset with 30-minute delay
- + Magnet installation accommodates all metal shelving also included are screws for wood shelf installation

Kit includes LED, 20" connecting cable, built-in on/off switch, occupancy Sensor, 9' grounded power cord, magnet for metal shelf installation, and screw kit for wood shelf mounting.

Product	Light	Length / W	Finish
94ELS0618100	neutral white	18 25/32 in / 6 W	Aluminum
94ELS0824100	neutral white	24 17/32 in / 8 W	Aluminum
94ELS1436100	neutral white	36 11/32 in / 14 W	Aluminum
94ELS1848100	neutral white	48 15/64 in / 18 W	Aluminum



See FLUORESCENT T5 PERNO products p. 42 and 43.



7.5W

50,000 h

2 5/16"
(59 mm)

7/8"
(22 mm)



LED PRIME office task light 7.5 W

Richelieu's new LED 20" Prime has a 180° swivel feature that allows for complete control. Magnet for metal shelf installation or easily access the screw holes for wood shelf installation, thanks to the 180° swivel feature.

- + Aluminum body construction with a clear lens
- + Built in LED power supply

Kit includes one 9' power cord, built in LED power supply and one 20" connecting cable.

Product	Light	Length	Finish
26121090	cool white	20"	black
26121100	cool white	20"	silver





LED

Kits



- 5W
- 50,000 h
- 5 1/4" (133 mm)
- 7 7/8" (200 mm)
- 1" (25 mm)

LED PURE desk lamp 5W



Contemporary look, built with functionality in mind! While other desk lamps have only one or two points of articulation, Richelieu's LED 5W desk lamp with gooseneck arm and swivel head offers a full range of flexibility in directing your light where you need it!

- + Strong gooseneck arm, 25" in length, for complete flexibility and control of your light (length of arm from the base to the lamp: 670 mm / 26 3/8")
- + 3-step dimmer function built into base for easy control of light levels with just a single touch (ON at 6%, 50%, 100% and OFF)

Product	Light	Finish
2089090	neutral white	silver



Kit Includes two high-powered CREE LED Chip Technology for a total of 5W, built-in 3-step touch dimmer, power supply.



- 9.6W
- 50,000 h
- 3' (1 m)

LED INNOVAFLEX color changing tape light 9.6 W



Adjust your color temperatures from warm (2,700 °K) to cool (6,000 °K) with a convenient remote control.

- + 120 LED's 9.6 W per meter / 3'
- + Peel and stick installation with mounting brackets optional

Product	Light
82123040	color changing



Kit includes dimming feature.



KITS



LED


Kits











LED CONTROL 8.2W

High-output light for cabinets, armoires, or trophy cases, Richelieu's LED Control 8.2W light is the perfect solution to light up those dark spots!

- + Swivel feature allows you to direct the light exactly where you need it
- + Six quality CREE LEDs

 Kit includes six quality CREE LEDs for a total of 8.2W. Each light includes its own power supply: 350 mA ETL-certified power supply included in the box with a 10' (3 m) power cord.

-  8.2W
-  40 000 h
-  4 11/32" (110 mm)
-  1 1/16" (43 mm)
-  15°
-  3 3/4" (92 mm)
-  

Product	Light	Finish
361121170	cool white	aluminum
361122170	warm white	aluminum



LED

Kits




- 2.8W
- 50,000 h
- 12" (305 mm)
- 7/16" (11 mm)
-
-

LED COLOR CHANGING FLEX TAPE LIGHT 2.8W

Why decide on one color when the possibilities are endless?

- + Color changing RGB flex tape light gives you the freedom to rotate through different colors updating your design effortlessly
- + Remote control also provides color changing functions such as flash, strobe, smooth and fade lighting effects



OPTIONAL FOR LED color changing flex tape light **74201742** Direct connector, **742120** 12" Connecting cable, **7425742** "L" Connector, **74251742** "T" Connector, **7425X742** "X" Connector



Kit includes: 12" color changing flexible tape light, direct connector, power supply, control module and remote control.

Product	Description
742312742	LED 5' max. kit, color changing
7423812742	LED 8' max. kit, color changing
74212742	LED 12" add on, color changing



- 2.8W
- 50,000 h
- 12" (305 mm)
- 7/16" (11 mm)
-

LED FLEXIBLE TAPE LIGHT 2.8W

The LED Flexible Tape Light creates straight lines and can be angled for turns or curves!

- + Virtually invisible
- + Easy peel and stick installation



OPTIONAL FOR LED flexible tape light

"L" connector:

500121 Cool white
500122 Warm white

"T" connector:

500T121 Cool white
500T122 Warm white

"X" connector:

500X121 Cool white
500X122 Warm white

Connecting cable:

50012 (6")
500120 (12")
500420 (42")
51201 Direct quick connect



Kit includes: 12" LED flexible tape light, mounting bracket for optional second method of installation, transformer and direct quick connects.

Product	Description	Light
5012121	LED 5' max. kit	cool white
5012122	LED 5' max. kit	warm white
50812121	LED 8' max. kit	cool white
50812122	LED 8' max. kit	warm white
51812121	LED 18' max. kit	cool white
51812122	LED 18' max. kit	warm white
512121	12" add on	cool white
512122	12" add on	warm white

KITS



LED

Kits



5W

50,000 h

3" (76 mm)

9 3/8" (238 mm)

3 7/8" (98 mm)



Product Light

300135 warm white

LED ERA 5W

Recessed lighting is easy to incorporate into designs and just as simple to install!

- + Variable intensity with wall mounted dimming control unit
- + Unassuming appearance allows the design of the space to be the focal point

REQUIRED FOR LED ERA Housing and reflector 300135030 (white), 300135195 (brushed steel)

OPTIONAL 4253506 Slide dimmer control unit



Kit includes recessed ceiling fixture with quick connect option and 5W LED.



8W

50,000 h

4 1/4" (108 mm)

10 11/32" (262 mm)

4 11/32" (110 mm)



Product Light

42535 warm white

LED STELLAR 8W

Recessed lighting is easy to incorporate into designs and just as simple to install!

- + Variable intensity with wall mounted dimming control unit
- + Unassuming appearance allows the design of the space to be the focal point

REQUIRED FOR LED STELLAR Housing and reflector 42535030 (white), 42535195 (Housing in brushed steel and chrome reflector)

OPTIONAL 4253506 Slide dimmer control unit



Kit includes recessed ceiling fixture with quick connect option and 8W LED.



LED

Battery operated



- 1.6W
- 50,000 h
- 6 3/32" (155 mm)
- 15/32" (12 mm)

LED VEGA lithium powered rechargeable cabinet light 1.6 W

A great item that can be used inside cabinets, drawers and closets. Integrated passive infrared sensor (PIR sensor) detects the opening/closing of a door or cabinet, and automatically turns the light on/off. 1.6 W 3.7 V DC LED light is Lithium battery powered.

Product	Light	Finish
4301170	cool white	white

- + Flashing indicator light let's you know when it's time to charge your battery.
- + Red Indicator Light lets you know that your battery is charging. Once full charge is received the red light will go out.
- + Please use the included Micro USB cable to charge to a USB outlet.



Kit includes PIR sensor light, USB charge cable, Lithium battery and Instruction sheet.



- 0.14W
- 50,000 h
- 1 15/32" (37 mm)
- 1/2" (13 mm)
- 1 3/8" (35 mm)

LED PUCK LIGHT 0.14 W

An affordable LED solution for those hard-to-light places! This battery-operated LED light can detect motion at up to 32' (10 m) with a sensor angle of 120°. - Timer for 25-second auto shutoff after no motion is detected - Bore hole installation or convenient magnet installation for metal shelves or brackets.

Product	Light	Finish
71851430	warm white	white
71851490	warm white	black

- + Automatic motion detector built in
- + Bore hole installation or convenient magnet installation for metal shelves or brackets



Kit includes 3 required LR44 batteries.

BATT.



LED

Battery operated



0.5W

50,000 h

19/32"
(15 mm)

7/8"
(22 mm)



LED FARO drawer light 0.5W

This simple and effective system uses a bright last generation LED and a patented motion sensor.

+ Patented sensor and electronic chip wire

Kit includes 3 triple A batteries and two sided tape for easy installation on drawer backs.

Product	Light	Length	Finish
744121030	cool white	7"	white



0.27W

50,000 h

2 3/4"
(70 mm)

1 1/2"
(38 mm)

1/2"
(13 mm)



LED DRAWER LIGHT 0.27W

This drawer light is easy to install and guarantees a long useful life. White-finished plastic casing with a built-in LED & magnetic on/off switch. Convenient on/off switch located on the fixture.

Kit includes 3 x IR44 button cell batteries (4.5 V DC), magnetic on/off switch and two sided tape.

Product	Light	Finish
4301030	neutral white	white

Touchboards

205 Westwood Ave, Long Branch, NJ 07740

Phone: 866-94 BOARDS (26273) / (732)-222-1511

Fax: (732)-222-7088 | E-mail: sales@touchboards.com



LED

Battery operated



LED PILA wireless lighting 2W or 7.2W

Battery box with door contact switch allows you to install lighting virtually anywhere where you have no options for power! Require 8 "D" batteries (not included).

+ 3M self-adhesive backing for easy installation

Kit N° 744121090 includes a door contact switch: open the door or drawer and the light will automatically go on. Close the door or drawer to turn it off.

2W or 7.2W

50,000 h

5 1/2" (138 mm)

2 1/2" (64 mm)



Product	Description	Light	Finish
744121090	battery box & a door contact switch		black
744122040	tape light 1m - 7.2W	warm white	white
744124040	tape light 1m - 7.2W	neutral white	white
744122090	puck light 2W	warm white	black
744124090	puck light 2W	neutral white	black



LED CLOSET ROD 1.2W

The latest in easy LED Lighting Solutions!

- + Push-on button located on the fixture with an automatic motion detector that will turn off the light after 3 minutes.
- + Can support up to 33 lb (15 kg) evenly distributed

Kit includes 8 AAA batteries.

1.2W

50,000 h

22" or 34" (559 or 864 mm)

4 3/4" (121 mm)



Product	Light	Length	Finish
4301320	neutral white	22"	silver
4301620	neutral white	34"	silver

BATT.



LED

Battery operated



- 3.4W
- 50,000 h
- 1 1/2" (38 mm)
- 1 3/8" (35 mm)
- 6 15/16" (176 mm)



LED H2O pull/hook light 3.4 W

H2O was born from a conceptual idea of merging linearity and softness. This LED courtesy light is activated by a motion sensor. Powered by a lithium battery, easy to charge with a simple micro USB cable (included).

Product	Finish
1086030	white

- + The light turns on when detecting motion in a range of 5' (1.5 m)
- + The handle is provided with a dusk sensor and activates only in condition of darkness or weak light



Kit includes lithium battery and usb cable for recharge.



- 3.4W
- 50,000 h
- 3 3/8" (86 mm)
- 1 3/8" (35 mm)
- 3 1/2" (89 mm)



LED LAIN pull/hook light 3.4 W

The perfect union between design and function. This LED courtesy light is activated by a motion sensor. Powered by a lithium battery, easy to charge with a simple micro USB cable (included).

Product	Finish
1087030	white
1087906	anthracite

- + The light turns on when detecting motion in a range of 5' (1.5 m)
- + The handle is provided with a dusk sensor and activates only in condition of darkness or weak light



Kit includes lithium battery and usb cable for recharge.



LED

Battery operated




Rechargeable docking station included, 9 V 300 mA plug-in UL approved wall adaptor and a 60" power cord with charging and discharging protection.



Belt clip for easy carrying. High strength magnet for hands free use. Docking station with keyholes for mounting option.



Steel hook for hanging or multi positioning.

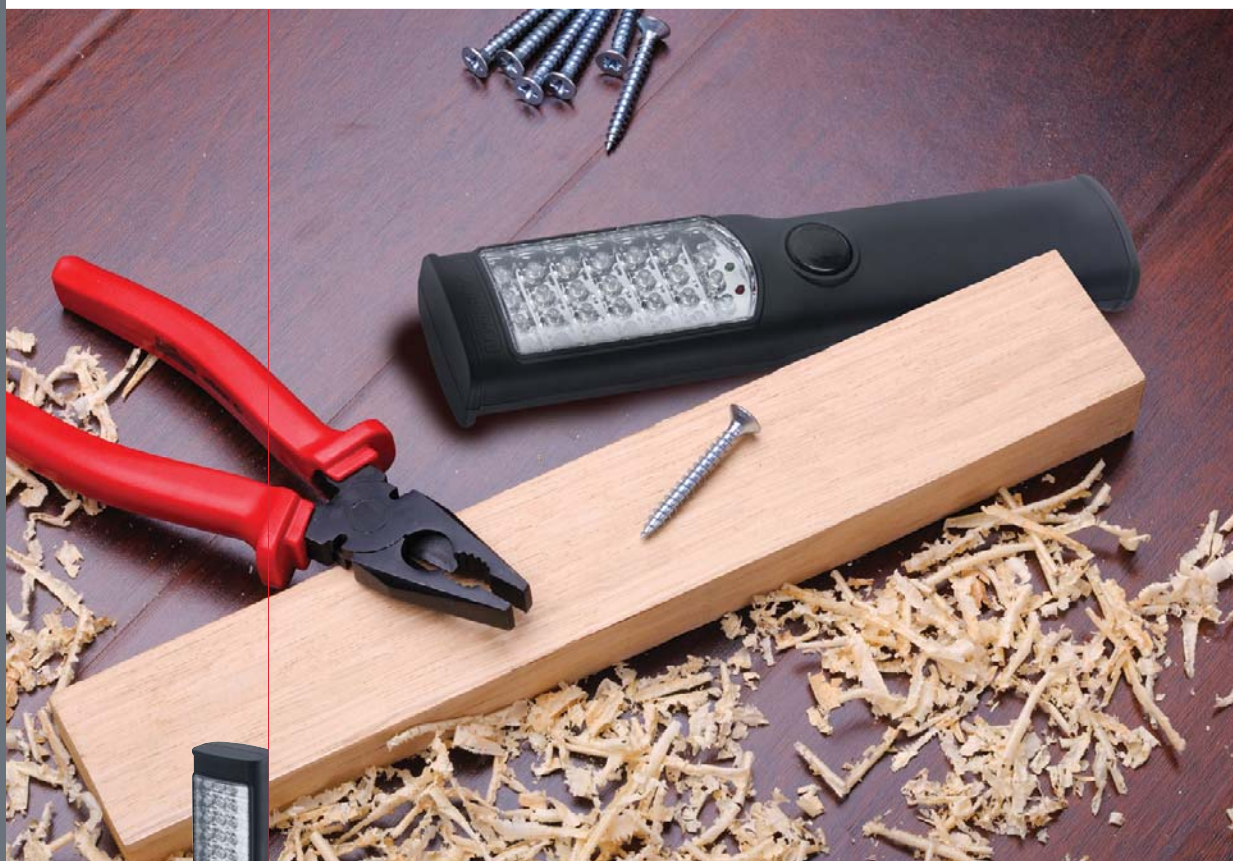

- 1.6W
- 50,000 h
- 2 1/4" (57 mm)
- 1/2" (13 mm)
- 9 3/4" (248 mm)



LED DURO XS portable hands-free light 1.6W

A wireless rechargeable LED lamp with a comfortable handle, handy lighting for all situations. A quality reflector provides a wide angle lighting.

- + Belt clip
- + Steel hook for hanging or for positioning in multiple angles
- + High strength magnet for hands-free handling



Kit includes an integrated lithium battery, a recharging base with wall mounting holes and a 9 V, 300 mA transformer, UL certified.

Product	Light	Finish
4084121090	cool white	black

BATT.



Lighting Solutions

FLUORESCENT

Fluorescents produce less heat and are chosen due to their energy efficiency. They are engineered to send light in all directions, providing excellent light coverage. T4 and T5 compact solutions make the installation of residential or commercial lighting the easiest of all lighting options. Under kitchen cabinets they act as task lighting for a countertop. In a display cabinet they show off prized possessions.



- 14W, 21W or 28W
- 7,500 h
- 7 7/8" (200 mm)
- 2 7/32" (56 mm)
-

FLUORESCENT PROFILO lighted shelf

A new look for lighting! The Profilo is the perfect solution for boutiques, offices or even the home.

- + Scratch-resistant anodized aluminum profile with glass shelves
- + Two-way lighting illuminates the top and bottom of the shelf

Kit includes a T5 cool white fluorescent tube & bracket support.

Product	Length/W	Finish
41970510	23 5/8" / 14W	aluminum
419705170	23 5/8" / 14W	stainless
41980510	35 7/16" / 21W	aluminum
419805170	35 7/16" / 21W	stainless
41990510	47 1/4" / 28W	aluminum
419905170	47 1/4" / 28W	stainless

Required: T5 Direct connection box with switch: **79990872**,
72" power cable **79990U72** (angled upwards) **79990D72** (angled down),
79990L72 (angled left), **79990R72** (angled right)



8W, 14W, 21W,
28W or 35W

8,000 h

7/8"
(22 mm)

1 1/2"
(38 mm)



T5 FLUORESCENT grounded

Richelieu's T5 grounded fluorescent offers you many different options for installation with over 20 different styles of connecting cables to choose from.

- + Electronic ballast
- + End of lamp life circuit protection



Kit includes one fixture, 4,100 °K T5 tube, Plexiglas cover, hardware mounting kit (metal clips & direct connector).

Product	Light	Length/W	Finish
79981208	neutral white	11 7/8" / 8W	white
79982314	neutral white	22 1/8" / 14W	white
79983421	neutral white	34" / 21W	white
79984628	neutral white	45 3/4" / 28W	white
79985935	neutral white	56 1/2" / 35W	white



8W, 14W, 21W,
28W or 35W

8,000 h

7/8"
(22 mm)

1 1/2"
(38 mm)



T5 FLUORESCENT grounded with switch

Richelieu's T5 grounded fluorescent offers you many different options for installation with over 20 different styles of connecting cables to choose from.

- + Electronic ballast
- + End of lamp life circuit protection



Kit includes one fixture, 4,100 °K T5 tube, plexiglas cover, hardware mounting kit (metal clips & direct connector), choose between models with a convenient on/off switch located on the fixture.

Product	Light	Length/W	Finish
79991208	neutral white	12 3/8" / 8W	white
79992314	neutral white	22 5/8" / 14W	white
79993421	neutral white	34 3/8" / 21W	white
79994628	neutral white	46 1/4" / 28W	white
79995935	neutral white	58" / 35W	white

REQUIRED T5 Direct connection box with switch: **79990872** and 72" power cable: **79990U72** (angled upwards) **79990D72** (angled down), **79990L72** (angled left) or **79990R72** (angled right)

OPTIONAL	Mounting kit	Straight connecting cable	Angled upwards connecting cable	Angled down connecting cable	Angled left connecting cable	Angled right connecting cable
	79990000	79990006 (6") 79990012 (12") 79990024 (24") 79990036 (36")	79990U06 (6") 79990U12 (12") 79990U24 (24") 79990U36 (36")	79990D06 (6") 79990D12 (12") 79990D24 (24") 79990D36 (36")	79990L06 (6") 79990L12 (12") 79990L24 (24") 79990L36 (36")	79990R06 (6") 79990R12 (12") 79990R24 (24") 79990R36 (36")



T5 FLUORESCENT SLIMLITE XL

SlimLite XL is cooler, brighter and more compact, making it the successor to the classic SlimLite.

- + Unlike the SlimLite, its plexiglass cover and fluorescent tube must be ordered separately
- + Max watts in line: 390 W

Description	23 1/8" (14 W)	34 7/8" (21 W)	46" (28 W)	59" (35 W)
white casing	76492200	76493400	76494300	76495900
plexiglass cover	76492201	76493401	76494301	76495901
T5 cool white tube	76492202	76493402	76494302	76495902
T5 warm white tube	76492203	76493403	76494303	76495903

14 W, 21 W,
28 W or 35 W

20,000 h

29/32"
(23 mm)

1 5/16"
(33 mm)



T4 FLUORESCENT SLIMLITE

This ultra-thin fluorescent fixture is designed for installation in wall units, in displays and under cabinets – so thin it can fit in any space. It features a compact fluorescent tube for discreet, effective installation; integrated electronic ballast and an instant, flicker-free start.

- + Fluorescent tubes and plexiglass cover included
- + Max watts in line: 155 W

Description	10" (7 W)	13" (10 W)	20" (18 W)
cool white fixture	76491012	76491312	76492012
warm white fixture	76491013	76491313	76492013
T4 cool white tube	7641030	7641330	7642030
T4 warm white tube	7637	7651330	7639

7 W, 10 W
or 18 W

10,000 h

11/16"
(17 mm)

1 1/4"
(32 mm)



Includes fluorescent tubes and plexiglass cover.

Required: Power cable: **76490100** (72"), **76490200** (72" with Rotary switch),
76490400 hardware box, **76490500** hardware box with switch.

REQUIRED Power cable: **76490100** (72"), **76490200** (72" with Rotary switch), **76490400** hardware box, **76490500** hardware box with switch

OPTIONAL **76490000** Fluorescent direct connection, Connecting cable: **76490008** (6"), **76490012** (12"), **76490024** (24"), **76490048** (48") or **76490072** (72"), Power cord (72") **76490100**, Power cord with roll switch (72") **76490200**, T5 SlimLite XL Plexiglas Cover: **76492201** for XL **76492200**, **76493401** for XL **76493400**, **76494301** for Thin **76494300**, **76495901** for Thin **76495900**, SlimLite T4 mounting clips **76495900**

Required: Power cable: **76690079** (79")



8 W, 14 W,
21 W or 28 W

8,000 h

7/8"
(22 mm)

1 5/8"
(41 mm)



T5 FLUORESCENT SOLUTION

Thanks to the compact T5 solutions are the easiest of all lighting options to install as under-cabinet fluorescent, display, and retail lighting.

+ Built-in electronic ballast

T5	13 1/2" / 8W	23 13/16" / 14W	35 1/2" / 21W	47 1/2" / 28W
white fixture	76691308	76692314	76693521	76694728
replacement tube	76691300	76692300	76693500	76694700



Includes a T5 4,100° K (neutral white) bulb, cover, direct connector, mounting clips for installation, and a built-in switch on the side of each fixture.

REQUIRED Power cable: **76690079** (70")

OPTIONAL Connecting cable **76690006** (6"), **76690012** (12"), **76690020** (20"), **76690040** (40"), Direct connector **76690000**, Mounting clip **766490600**



8W
or 13W

8,000 h

7/8"
(22 mm)

1 5/8"
(41 mm)



T5 FLUORESCENT

This under-cabinet fluorescent fixture is a simple solution for kitchen counter lighting.

- + Complete system: simply plug in and turn on
- + Saves up to 70% in electricity in comparison with incandescent fixtures
- + Rapid-start feature



Kit includes the fixture, a T5 cool white tube, 10' power cord, switch, mounting brackets and screws.

Product	Length/W	Finish
0131230	13 1/2"/8W	white



8W, 14W, 21W,
28W or 35W

4 5/16"
(109 mm)

1 11/32"
(33 mm)



T5 FLUORESCENT TAZETTA

Energy-efficient fluorescent 3,500K T5 task light with electronic ballast.

- + TCLP compliant
- + Center cord and switch standard



Kit includes a T5 fluorescent tube and spring steel mounting bar.

Product	Length/W	Suggested shelf size	Life cycle	Finish
90450E13	13"/8W	18" to 24"	7,500 hours	black
90450E24	24"/14W	30" to 42"	20,000 hours	black
90450E36	36"/21W	42" to 48"	20,000 hours	black
90450E48	48"/28W	48" to 60"	20,000 hours	black
90450E60	60"/35W	60" to 72"	20,000 hours	black



10W, 14W,
21W or 28W

10,000 h

3 3/8"
(86 mm)

1 1/8"
(29 mm)



T5 FLUORESCENT PERNO black

Looking for the most versatile T5 Fluorescent Task Light? Look no further, this is THE economical choice for a task lighting solution.

- + 160° swivel feature allows the user to position the light where needed
- + Convenient on/off switch located on the fixture



Kit includes fluorescent T5 tube, on/off switch, 9' power cord, 20" connecting cable and screw kit for wood shelf mounting.

Product	Length/W	Finish
94E1018090	18 3/4"/10W	black
94E1424090	24 1/2"/14W	black
94E2136090	36 11/32"/21W	black
94E2848090	44 11/32"/28W	black




T5 FLUORESCENT PERNO

Looking for the most versatile T5 Fluorescent Task Light? Look no further, this is THE economical choice for a task lighting solution.


- + Two fixing options
- + 160° swivel feature allows the user to position the light where needed



Kit includes neutral white fluorescent T5 tube, on/off switch, 9' power cord, magnet for metal shelf installation and screw kit for wood shelf mounting.

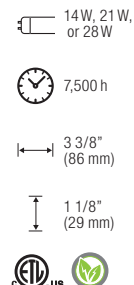

Product	Length/W	Finish
94E1424100	24" / 14 W	silver
94E2136100	36" / 21 W	silver
94E2848100	48" / 28 W	silver

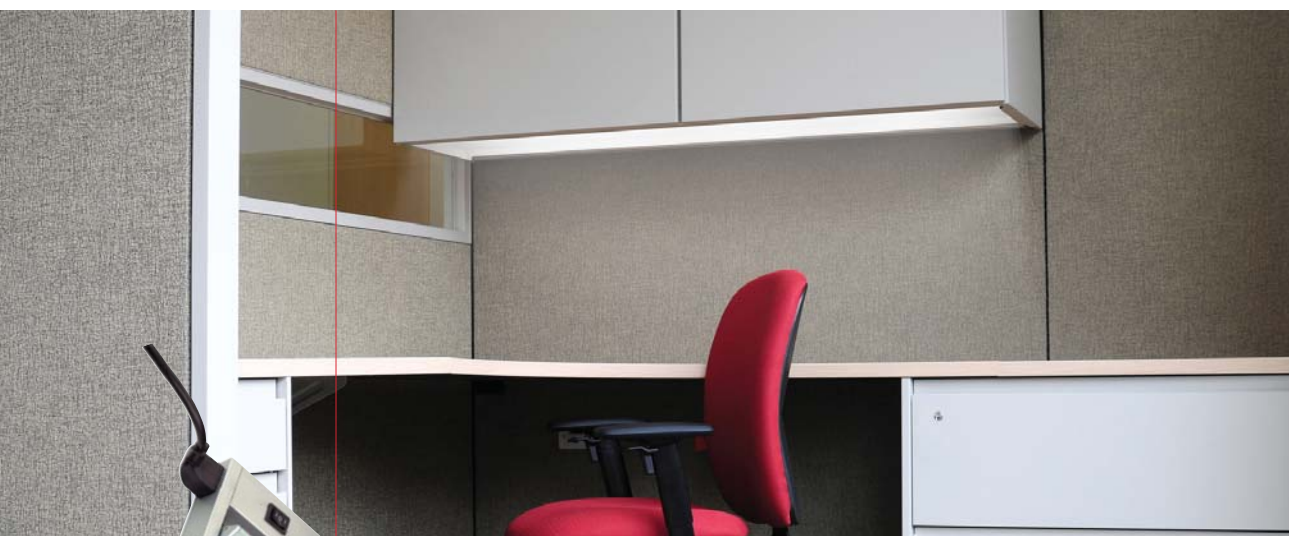


T5 FLUORESCENT PERNO with occupancy sensor

Looking for the most versatile T5 Fluorescent Task Light? Look no further, this is THE economical choice for a task lighting solution.

- + Two fixing options
- + 160° swivel feature allows the user to position the light where needed



Kit includes neutral white fluorescent T5 tube, on/off switch, occupancy sensor, 9' power cord, magnet for metal shelf installation and screw kit for wood shelf mounting.

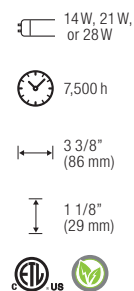

Product	Length/W	Finish
94ES1424100	24" / 14 W	silver
94ES2136100	36" / 21 W	silver
94ES2848100	48" / 28 W	silver



8 W, 12 W,
16 W or 20 W

10,000 h

7/8"
(22 mm)

1 5/8"
(41 mm)



T4 FLUORESCENT

Ideal fluorescent lighting for residential kitchens, bathrooms, wall units, etc.

+ Instant start, flicker-free with On/Off switch



Kit includes the fixture, a T4 cool white tube, power cord, switch, mounting brackets, screws and plexiglass cover.

	13 1/2" / 8 W	17 1/2" / 12 W	19 1/4" / 16 W	21" / 20 W	Finish
fixture	77491530	77491930	77492130	77492330	white
replacement tube	77481501	77481901	77482101	77482301	white



22 W, 24 W
or 28 W

10,000 h

7/8"
(22 mm)

1 5/8"
(41 mm)



T4 FLUORESCENT black

Ideal fluorescent lighting for residential kitchens, bathrooms, wall units, etc.

+ Instant start, flicker-free with On/Off switch



Kit includes the fixture, a T4 cool white tube, power cord, switch, mounting brackets, screws and plexiglass cover.

	29" / 22 W	34 1/2" / 24 W	46 1/4" / 28 W	Finish
fixture	77492390	77493190	77494390	black
replacement tube	77482201	77482401	77482801	black



HALOGEN

Required: Compact transformer: **7560** (60W max.), **7660** (60W max., RFI), **77120** (120W max. commercial)



Lighting Solutions

HALOGEN

Halogen fixtures generate a white, vibrant light, they last longer and produce more lumens per watt than the traditional incandescent versions. With an average life cycle of 2,000 to 4,000 hours, halogen solutions remain an excellent option for counter lighting.



HALOGEN triangular 20W

Designed for under-cabinet installation, its contemporary style will be sure to complement your decor.

- + Triangle made from high-quality materials
- + Easy to install with only 1 screw

Includes a 20W bulb (N° **3241** premium G4 bi-pin) and a 79" Quick Connect cable with plug to connect halogen lights and transformer.

- 3241**
20W
- 2,000 h
to 4,000 h
- 4 7/8"
(124 mm)
- 5 1/8"
(133 mm)
- 1 5/8"
(41 mm)
-

Product	Finish
7220170	stainless

REQUIRED Compact transformer: **7560** (60W max.), **7660** (60W max., RFI), **77120** (120W max. commercial)

OPTIONAL **7563** Terminal block, Connecting cable: **7510** (39"), **7517** (79"), **7516** (119")

See accessories p. 54 to 60.

HALOGEN



Required. Compact transformer: **7560** (60 W max.), **7660** (60 W max., RFI), **77120** (120 W max. commercial)



HALOGEN recessed or surface-mounted 20W

This discreet halogen fixture is designed for installation in or under kitchen cabinets and displays.

- + Ultra-polished aluminum reflector
- + Max. height 7/8" (22 mm) with trim ring

Includes a 20W bulb N° **3241** Premium G4 bi-pin/20W, trim ring for surface mounting, 72" Quick connect cable with plug for connections between halogen lights and transformer.

Product	Finish
10022030	white
10022090	black
100220130	brass
100220140	chrome
100220170	stainless

- 3241** 20W
- 2,000 h to 4,000 h
- 2 15/16" (75 mm)
- 5/8" (16 mm)
- 2 11/16" (68 mm)
-



HALOGEN recessed or surface-mounted 20W

Ideal for installation in wood or sheet metal, its versatility allows for the perfect lighting solution.

- + Easy bulb replacement
- + Max. height 1" (25 mm) with trim ring

Includes a 20W bulb (N° **3241** Premium G4 bi-pin/20W), trim ring for surface mounting, 72" Quick connect cable with plug for connections between halogen lights and transformer.

Product	Finish
1112130	brass
1112140	chrome
1112170	stainless

- 3241** 20W
- 2,000 h to 4,000 h
- 2 5/8" (67 mm)
- 5/8" (16 mm)
- 2 1/8" (54 mm)
-



HALOGEN recessed 10W or 20W

This economically priced fixture is suited for all lighting applications.

- + Frosted glass with aluminum reflector
- + Max. height 7/8" (22 mm) with trim ring

Includes a 10W or 20W bulb (N° **3210** G4 bi-pin 12V/10W), 79" Quick connect cable and connector.

Product 10W	Product 20W	Finish
711030	712030	white
711090	712090	black
7110140	7120140	chrome
7110170	7120170	stainless

- 3210** 10W ou **3241** 20W
- 2,000 h to 4,000 h
- 2 5/8" (67 mm)
- 7/8" (22 mm)
- 2 1/8" (54 mm)
-

REQUIRED Compact transformer: **7560** (60 W max.), **7660** (60 W max., RFI), **77120** (120 W max. commercial)
OPTIONAL **7563** Terminal block, Connecting cable: **7510** (39"), **7517** (79"), **7516** (119")



HALOGEN

Required: Transformer: 10016012 (60W max.)



HALOGEN puck light 20W

Make your furniture unique with Richelieu's new 20W furniture puck light! Richelieu's new low profile halogen puck design will help you add lighting in a few quick steps to your furniture plans.

- + Friction fit installation
- + All plastic housing




Includes a 20W G4 bulb, 12" Quick connect cable with plug for connections between lights and transformer.

 **3240**
20W

 2,000 h
to 4,000 h

 2 5/8"
(67 mm)

 5/8"
(16 mm)

 2 3/16"
(56 mm)



Product **Finish**

1001090 black

1001170 satin nickel

REQUIRED Transformer: 10016012 (60W max.)

OPTIONAL Connecting cable: 100140 (40"), 100179 (79"), Trim ring for surface mounting: 10018090 (black), 10018170 (satin nickel)

See accessories p. 54 to 60.


HALOGEN

 **Richelieu**
richelieu.com

B
GROUP



Required: **1020550** 3 5/8" can for MR16 (with transformer) or **1020060** 3 5/8" can for GU10

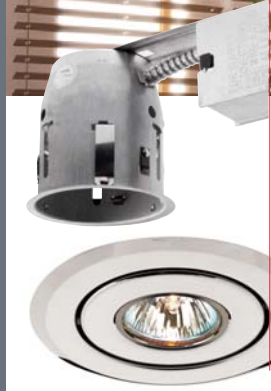


HALOGEN recessed and swivel 50 W (ceiling)

This halogen fixture is designed for ceiling installation, providing general lighting in kitchens, living rooms, hallways, or anywhere directional lighting is required.

- + Swivels to direct light where needed
- + Choose a casing: MR16 (N° **1020550**) for low-voltage (with transformer) or GU10 for line voltage (N° **1020060**)

- 01620**
MR16 20W
- 01635**
MR16 35W
- 101050**
GU10 50W
- 2,000 h
to 4,000 h
- 3 5/8"
(92 mm)
- 18°
-

Product	Finish
624030	white
6240195	brushed nickel
6240AB	antique brass
62400RB	oiled bronze

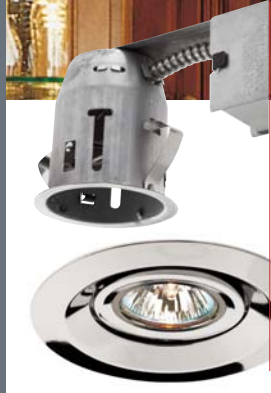

HALOGEN recessed 50 W (ceiling)

This halogen fixture is designed for ceiling installation, providing general lighting in kitchens, living rooms, hallways, or anywhere fashionable and functional lighting is required.

- + Made of die-cast aluminum
- + Choose a casing: MR16 (N° **1020550**) for low-voltage (with transformer) or GU10 for line voltage (N° **1020060**)

The recessed ceiling line is composed of many components including trims, bulbs, fixtures (recessed can), insulation boxes, and vapor barriers. Each component is sold separately.

- 01620**
MR16 20W
- 01635**
MR16 35W
- 101050**
GU10 50W
- 2,000 h
to 4,000 h
- 4 19/32"
(117 mm)
-

Product	Finish
6440030	white
64400139	aged silver
64400175	brushed chrome
64400195	brushed nickel

REQUIRED **1020550** 3 5/8" can for MR16 (with transformer) or **1020060** 3 5/8" can for GU10
OPTIONAL MR16 halogen bulb: **01620** (20W), **01635** (35W), GU10 halogen bulb: **101050** (50W), **10201000** Plastic vapor barrier, **1020400E** Insulation box



HALOGEN

Required: **1020550** 3 5/8" can for MR16 (with transformer) or **1020060** 3 5/8" can for GU10



 **01620**
MR16 20W

 **01635**
MR16 35W

 **101050**
GU10 50W

 2,000 h
to 4,000 h

 4 3/4"
(121 mm)



HALOGEN recessed shower trim 50W (ceiling)

Don't shower in the dark! Richelieu's damp-location-approved, frosted-lens recessed light trim is the perfect bathroom solution. It can also be used as a closet light.

+ Choose a casing: MR16 (N° **1020550**) for low-voltage (with transformer) or GU10 for line voltage (N° **1020060**)

Product	Finish
75000195	brushed nickel

REQUIRED 1020550 3 5/8" can for MR16 (with transformer) or 1020060 3 5/8" can for GU10

OPTIONAL MR16 halogen bulb: **01620** (20W), **01635** (35W), GU10 halogen bulb: **101050** (50W), **10201000** Plastic vapor barrier, **1020400E** Insulation box



HALOGEN

Required: 102065 4" can for PAR20



HALOGEN recessed 50W (ceiling)

This halogen fixture is designed for ceiling installation, providing general lighting in kitchens, living rooms, hallways, or anywhere directional lighting is required.

- + Swivels 20 degrees
- + Use the can PAR20 (N° 102065)
- + Doesn't need a transformer

- 01250**
PAR20 50W
- 2,000 h
to 4,000 h
- 5 1/8"
(130 mm)
- 20°
-

Product	Finish
7152030	white
71520140	chrome
71520195	brushed nickel
71520AB	antique brass

REQUIRED 102065 4" can for PAR20

OPTIONAL 01250 Halogen capsule bulb (50W), 10201000 Plastic vapor barrier, 1020400E Insulation box



HALOGEN

Required: 1020450 3 5/8" can for MR16 (with transformer) or 1020700 3" can for GU10



HALOGEN recessed 50 W (ceiling)

This halogen fixture is designed for ceiling installation.

- + Made of die-cast aluminum
- + Choose a casing: MR16 (N° 1020450) for low-voltage (with transformer) or GU10 for line voltage (N° 1020700)

Product	Finish
7355030	white
73550140	chrome
73550195	brushed nickel
73550AB	antique brass
735500RB	oiled bronze

- 01620 MR16 20 W
- 01635 MR16 35 W
- 101050 GU10 50 W
- 2,000 h to 4,000 h
- 3 3/4" (95 mm)
-



HALOGEN recessed 50 W (ceiling)

This halogen fixture is designed for ceiling installation.

- + Swivels to direct light where needed
- + Choose a casing: MR16 (N° 1020450) for low-voltage (with transformer) or GU10 for line voltage (N° 1020700)

Product	Finish
7240030	white
72400140	chrome
72400195	brushed nickel

- 01620 MR16 20 W
- 01635 MR16 35 W
- 101050 GU10 50 W
- 2,000 h to 4,000 h
- 3 23/32" (94 mm)
- 17°
-



HALOGEN recessed and swivel 50 W (ceiling)

Use this recessed trim for all your accenting needs.

- + Swivels to direct light where needed
- + Choose a casing: MR16 (N° 1020450) for low-voltage (with transformer) or GU10 for line voltage (N° 1020700)

Product	Finish
7724030	white
7724090	black

- 01620 MR16 20 W
- 01635 MR16 35 W
- 101050 GU10 50 W
- 2,000 h to 4,000 h
- 3 3/4" (95 mm)
- 17°
-

REQUIRED 1020450 3 5/8" can for MR16 (with transformer) or 1020700 3" can for GU10

OPTIONAL MR16 halogen bulb: 01620 (20W), 01635 (35W), GU10 halogen bulb: 101050 (50W), 10201000 Plastic vapor barrier, 1020400E Insulation box










HALOGENS recessed 50W (ceiling)

Brighten dark areas, emphasize works of art, light up your kitchen, or give any room its own unique atmosphere with recessed lighting!

- + 18° swivel focuses light wherever you need it
- + Fully assembled
- + No transformer needed

 Kit includes fully assembled 12-pack in bulk brown box, including 12 fixtures, 12 GU10 50W bulbs, and 12 trims.

-  **101050**
50 W
-  2,000 h
to 4,000 h
-  3 1/4"
(83 mm)
-  4 1/8"
(105 mm)
-  18°
-  

Product	Finish
101250030	white
1012500195	brushed nickel












HALOGEN recessed or surface-mounted 20W

Economically priced kit includes a full metal casing, recessed halogen fixture, 10' power cable with roll switch, transformer and bulbs.

- + Transformer is equipped with auto-reset protection against short circuits and overloads

OPTIONAL Connecting cable: **0110** (72")

 Includes 10' (3 m) power cable with roll switch, transformer, and bulbs (N° **3240** bi-pin type, 12 V).

-  **3240**
20 W
-  2,000 h
to 4,000 h
-  2 11/16"
(68 mm)
-  5/8"
(16 mm)
-  2 1/8"
(54 mm)
-   

Kits 1 X 20W	Kits 2 X 20W	Kits 3 X 20W	Trim ring for surface mounting	Finish
1003130	1003230	1003030	1003930	white
1003190	1003290	1003090	1003990	black
10031130	10032130	10030130	10039130	brass
10031140	10032140	10030140	10039140	chrome
10031195	10032195	10030195	10039195	nickel



HALOGEN

Kits

KITS



HALOGEN recessed 20W

Round 20W halogen light with transformer, bulb, cord and quick connection plug.



Kit includes a transformer, a 20W G4 bulb, cord and quick connection plug.



3240
20 W



2,000 h
to 4,000 h



2 5/8"
(67 mm)



3/4"
(19 mm)



2 1/4"
(57 mm)



Kits	Kits	Kits	Finish
1 X 20W	3 X 20W	5 X 20W	
	030130		white
	030190		black
0101140	0301140	0501140	chrome



HALOGEN recessed with swivel 20W or 50W

Multidirectional round 20W or 50W halogen light with transformer and quick connection plug.

+ 45° swivel



Kit includes an MR16 bulb, transformer, 10' primary cable and secondary 18" cable.



01620 (20W)
or **01650** (50W)



2,000 h
to 4,000 h



3 15/16"
(100 mm)



3"
(76 mm)



3 3/4"
(95 mm)



45°



Kits	Kits	Kits	Finish
1 X 20W	1 X 50W	3 X 50W	
	010590	030590	black
0103140	0105140	0305140	chrome



A GROUP



Use with LED Skate, Kite, Goccia, Leaf and Folio.

LED power supply

Product	Finish
51215 (15W max)	white
51230 (30W max)	white

+ 12 VDC



LED connecting cable

Product	Finish
51278 (78")	white



B GROUP



Use with LED Nova.

LED power cord

Product	Finish
4511240070 (70")	white

! Do not exceed 100W when mixing and matching sizes on one power cord.



LED connecting cable

Product	Finish
4511240006 (6")	white
4511240012 (12")	white
4511240020 (20")	white
4511240040 (40")	white



C GROUP



Use with LED Spot 1.6W, flexible tape light 0.8W, round and square light 1.2W, Stick2, Twinstick2, Lpad and Qpad.

LED power supply

Product	Finish
30624 (6W max. DO NOT USE with LED LPad et QPad)	white
32524 (30W max.)	white
37524 (75W max.)	white

+ Input voltage: 120 V~, 50/60 Hz.
+ Output voltage: DC 24 V



Remote control dimmer for LEDs

Product	Finish
310127889	white

+ Built-in memory function
+ Wireless control operates on a radio frequency of 2.4 GHz for interference-free operation
+ Depending on installation, the operating range can be up to 50 feet

! To use only with power supplies N° 30624, N° 32524 and N° 37524.



Motion activation switch for LEDs

Product	Finish
310127899	white

+ The switch is triggered by a person approaching and/or by door motion
+ Real detection distance between 2" (50 mm) and 6 5/16" (160 mm)

! There must be a distance of approximately 2" (50 mm) (depending on the reflection surface) between the closed door and the IR sensor.

To use uniuement with power supplies N° 30624, N° 32524 and N° 37524.



Dimmer

Product	Finish
310127880	white

+ Comes with a 79" main cable

! Both dimming control unit (N° 310127880) and rotary dimmer (N° 310127888) must be used together for the dimming function.
Use only with the following power supplies: N° 30624, N° 32524, N° 30624, N° 37524 and N° 788D18 Allowing for full dimming control.



LED terminal block

Product	Finish
310127000	white

! Use the terminal block with power supply N° 32524, N° 30624, or N° 37524.
Use a 98" connecting cable (N° 310127898) for additional space between LED light and power supply.



Rotary dimmer

Product	Finish
310127888	white

+ 0-10 V
+ Rotary dimmer that, once connected to the add-on dimming control, controls the power to the LED and allows it to dim 0-100%

! Use with the dimmer N° 310127880.



98" connecting cable

Product	Finish
310127898	white

! The LED cable to be use with the following power supplies: N° 32524, N° 30624 or N° 37524.



D GROUP



Use with LED Pro and Invoke.

LED power supply

Product	Finish
8990 (9W max.)	white

+ 110V, 50/60Hz
+ Power cord of 79" (2 m)

! Can control 1 to 3 high-powered 3W LEDs.





LED power supply

Product	Finish
1551218 (18W max.)	black
1551018 (18W max., with integrated passive IR sensor)	black
1551170 (18W max., with dimmer)	black
1551090 (18W max., with infrared IR sensor, 0-60 mm (+/- 10 mm))	black



- + Voltage: 12 V
- + 70" (1.77 m) power cord

Can control up to 6 lights

LED connecting cable

Product
899040 (40")
899079 (79")



To be used with power supply N° 8990, N° 89918, N° 1551018, N° 1551170 or N° 1551090 for additional connections between the power supply and LED lights (Pro and Invoke).



Use with LED Pixel OB®, Net SP®, Cubik, Shine.

LED power supply

Product	Finish
7779 (10W max.)	
7890 (10W max., dimmable)	



- + 110 V, 50/60 Hz
- + 79" (2 m) power cord

Can control 8 high-powered 1.2W LEDs.
N° 7890 to be used with N° 788170 stainless steel dimmer or N° 788140 chrome dimmer.

LED dimmer

Product	Finish
788170	stainless
788140	chrome



- + A full-range, 0-100% dimmer for perfect light levels all the time!

Use with power supply N° 7890

LED connecting cable

Product
899040 (40")
899079 (78")



Use with the following power supplies: N° 7779 or N° 7890



Use with recessed 3W LED high output, Big6 Two, Mini-Eye 1W.

LED power supply

Product	Finish
7880 (9W max.)	white



- + 110 V, 50/60 Hz
- + Terminal block attached for three 1 W LED lights; additional terminal block (N° 7773) available for up to 9 connections
- + 79" (2 m) power cord

To be used with item N° 7880 for additional connections between the power supply and LED lights: N° 76636 connecting cable, 36" (sold separately), N° 76672 connecting cable, 72" (sold separately).

Electronic power supply

Product	Finish
78818 (18W max.)	white



- + 110 V, 50/60 Hz
- + Overload, overheat, and short-circuit protection
- + 79" (2m) plug-in power cord with two attached Quick Connect terminal blocks for three LED lights each

Total of 6 outlets for a maximum of 18 W

Electronic dimmable power supply

Product	Finish
788D18 (18W max.) Requires N° 310127888	white



- + 110 V, 50/60 Hz
- + 79" plug-in power cord with two attached Quick Connect terminal blocks for three LED lights each
- + Total of 6 outlets for a maximum of 18 W

Total of 6 outlets for a maximum of 18 W

LED connecting cable

Product	Finish
76636 (36")	black
76672 (72")	black



Use with the following power supplies: N° 7779 or N° 7890



Use with LED Lumino, flexible tape light roll, LED Linea

Power supply

Product	Finish
2652412 (12W max.)	black
2651236 (36W max.)	white
2651260 (60W max.)	white



+ Voltage: 24V



Use with LED3 New Vision (N° 155123170) only.

3 to 18 W CC power supply

Product	Finish
71550 (18W max)	black



+ Includes required touch on/off
+ Output Voltage: 3~21Vdc

LED connecting cable

Product
7155040 (40")
7155079 (79")



Use with LED Piccolo and LED furniture light 2.2W.

Power supply

Product	Finish
1452412 (24W max)	black



+ 12 V
+ On/off roll switch located on the power cord



Use with LED slimite XL or fluorescent lamp Slimite T4 and Slimlite XL t5.

Power cable

Product	Finish
76490100 (72")	white
76490200 (72" with rotating switch)	white



Hardwire box

Product
76490400



Hardwire box with switch

Product
76490500



Connecting cable

Product	Finish
76490008 (6")	white
76490012 (12")	white
76490024 (24")	white
76490048 (48")	white
76490072 (72")	white



On/Off rocker switch

Product	Finish
76490300	white





A GROUP



Use with halogen recessed or surface mount lamps

Compact transformer

Product

7560 (60W max.)



7660 (60W max., RFI)

- + 79" power cord
- + Clamping voltage: 330 V
- + 3 outlets



Compact transformer with RFI

Product

77120 (commercial 120W max.)



- + Radio Frequency Interference (RFI) suppressor
- + For low-voltage halogen lighting



Terminal block

Product

7563

To be used if more than three 10W halogen lights need to be connected to one transformer. Allows connections of up to 6 or 12 10W halogen lights.



Connecting cable

Product

7510 (39")

7517 (79")

7516 (119")

To be used with N° 77120, N° 7660, or N° 7560 transformers for additional connections between a transformer and low-voltage halogen lights.



B GROUP



Use with round halogen light N° 1001090 (black) or N° 1001170 (satin nickel).

Transformer

Product

10016012 (60W max.)



- + Voltage: 12V
- + Roll switch located 3" from the plug on a 6" cord
- + Dimmable

3 lights max. per transformer.



Connecting cable

Product

100140 (40")

100179 (79")

To be used with N° 10016012 transformer for additional connections between a transformer and low-voltage halogen lights.



C GROUP



Use with recessed halogen light 50W, recessed and swivelling halogen 50W and shower recessed halogen 50W

MR16 halogen bulb

Product

01620 (20W)

01635 (35W)



GU10 halogen bulb

Product

101050 (50W)



Plastic vapor barrier

Product

10201000

Vapor barriers will reduce the chance of water vapor condensing and collecting in new insulation housing. Don't add a vapor barrier if there is existing insulation.



Insulated box, new construction

Product

1020400E

- + Unfinished
- + Length: 12 5/8" (321 mm)
- + Height: 6 7/8" (175 mm)
- + Width: 8 5/8" (219 mm)

If you have a new home or your ceiling has insulation on top, you'll also need an insulation box.



D GROUP



Use with recessed 50W halogen light and 4" PAR20 casing (No 102065)

Halogen capsylite bulb (50W)

Product

01250



SEE



- 10201000** Plastic vapor barrier
- 1020400E** Insulation box, new construction

E GROUP



Use with recessed 50W halogen light and 3 5/8" casing and MR16 transformer.

SEE



- MR16 halogen bulb: N° **01620** (20W), N° **01635** (35W),
- GU10 halogen bulb: N° **101050** (50W) N° **10201000**
- Plastic vapor barrier, N° **1020400E**
- Insulation box, new construction

SWITCHES AND DIMMERS


4 levels touch dimmer

Product
784190 




Just connect the touch control wire to any metallic surface such as a cabinet hinge, metal screw, or metal knob, etc., for fingertip control of the dimming and switching of your lights

- + Touch-sensitive dimmer provides three levels of brightness with a touch on/off function
- + Easy installation
- + 300 W maximum capacity

 Compatible with halogen, xenon and incandescent bulbs.


Rotary dimmer

Product
784030 



A full-range, 0-100% dimmer for perfect light levels all the time!


- + Easy installation, no wiring required!
- + 300 W maximum capacity

 Compatible with halogen, xenon and incandescent bulbs.

Push-button switch

Product
3121 



 Compatible with LED, halogen, fluorescent, xenon and incandescent light bulbs.


3 levels touch dimmer

Product
2500  



Touch-sensitive dimmer provides three levels of brightness.

- + Female connector: 24" (610 mm)
- + Power cord: 10' (3 m)
- + 300 W maximum capacity

 Compatible with halogen, incandescent, and xenon lights.


300 W dimmer switch

Product
010890  



Rotary dimmer.

- + Female connector: 18" (457 mm)
- + Power cord: 10' (3 m)
- + 300 W maximum capacity

 Can be used with LED, halogen, and incandescent lights.


Rotary switch

Product
3251  



Rotary switch with 2 outputs and 4 positions.

- + Power cord of 10' (3 m)
- + Female connector: 24" (610 mm)
- + Maximum panel thickness of 3/4" (18 mm)

 Can be used with halogen, xenon and incandescent lights.


Automatic switch

Product
DC413M41  



Install this automatic switch facing the inside of a cabinet door, and the lights will turn on and off when the door is opened and closed.

- + Connector: 24" (610 mm)
- + Power cord: 10' (3 m)

 Can be used with LED, halogen, fluorescent, xenon and incandescent lights.


Motion sensor

Product
78130 



Sensor for lights. Features a timer that adjusts from 10 seconds to 5 minutes. The perfect energy-saving closet solution! Automatically turns lights on and off with a maximum detection distance of 19.7' (6 m).

- + 300 W maximum capacity

 Can be used with LED, halogen, fluorescent, xenon and incandescent lights.

On/Off switch

Product
31221 



- + 300 W maximum capacity

 Can be used with LED, halogen, xenon, and incandescent lights.

On/Off switch - black

Product
31225 



- + Male connector: 3-1/2" (89 mm)
- + Female connector: 48" (1.2 m)
- + Power cord: 10' (3 m)

 Can be used with LED, halogen, xenon, and incandescent lights.

OUTLETS AND SWITCHES

Double outlet - oval

Product	Finish
235320083	brown
235320090	black
235320100	gray

+ Amperage: 15 A
+ Voltage: 125 V



Decora® tamper-resistant outlet

Product	Finish
235325083	brown
235325090	black
235325100	gray

+ Amperage: 15 A
+ Voltage: 125 V



Decora® tamper-resistant GFCI receptacle

Product	Finish
237599083	brown
237599090	black
237599100	gray

+ Amperage: 15 A
+ Voltage: 125 V



Single-pole toggle switch

Product	Finish
231451083	brown
231451090	black
231451100	gray

+ Amperage: 15 A
+ Voltage: 120 V



3-Pole toggle switch

Product	Finish
231453083	brown
231453090	black
231453100	gray

+ Amperage: 15 A
+ Voltage: 120 V

4-Pole toggle switch

Product	Finish
231104083	brown
231104090	black
231104100	gray

+ Amperage: 15 A
+ Voltage: 120 V

Decora® single-pole switch

Product	Finish
235601083	brown
235601090	black
235601100	gray

+ Amperage: 15 A
+ Voltage: 120 V



Decora® 3-pole switch

Product	Finish
235603083	brown
235603090	black
235603100	gray

+ Amperage: 15 A
+ Voltage: 120 V

Decora® 4-pole switch

Product	Finish
235604083	brown
235604090	black
235604100	gray

+ Amperage: 15 A
+ Voltage: 120 V

IlumaTech slide dimmer kit

Product	Finish
4253506	brown, black or gray

IlumaTech is packaged with three colors in one box: black, brown and gray.

+ Voltage: 120 V
+ Standard ON/OFF
+ Radio/TV filter



WIRE MANAGEMENT

Wire management molding

Product	Finish
PF3411	beige
PF3430	white

+ Dimensions: 1/2" x 11/16" (13 x 17 mm)
+ Length: 96" (2.438 m)
+ Materials: PVC with peel and stick tape



COMMUNICATION AND POWER ACCESS BOXES

Access boxes

Product	Description	Finish
10041090	square (6" x 6")	black
100410170	square (6" x 6")	stainless steel
10042090	rectangular (10 1/4" x 3 1/16")	black
100420170	rectangular (10 1/4" x 3 1/16")	stainless steel
10043090	double rectangular (10 3/4" x 6 1/2")	black
100430170	double rectangular (10 3/4" x 6 1/2")	stainless steel

- + Available in 2-gang configuration for any combination of data, voice, fibre optics, fax, audio, video or power
- + Includes duplex power receptacle
- + Field movable voltage barrier system
- + Foldaway cover/door for easy access



Coupler for above access boxes

Product	Description
10045190	RJ11
10045290	RJ45



Pop-Up Power Bar

Description	100492140	100492185	100492090
Outlet	2	2	2
USB	2	2	2
RJ45	N/A	N/A	2
Top	Aluminum	Aluminum	Plastic
Finish	Chrome	satın nickel	black



Power Bar with USB

Product	Finish
100313090	noir



- + Grounded outlets: 6
- + 2 powered USB charge ports 2.1 A
- + Length: 15 3/4" (400 mm)
- + Width: 2 1/8" (54 mm)



Coaxial/Telephone Cable Power Bars

Description	221190	431190	431290	431390	431490
Outlet	2	3	3	3	4
RJ11	N/A	1	1	1	1
RJ45	N/A	N/A	N/A	1	N/A



- Multiple outlets and coaxial cable for TV connection.
- + Cord length: 10'

Power Harness

Product	Finish
100461	mastic
10046190	black



- + 10' power cord
- + 15A circuit breaker
- + On/off switch



Round Power Station

Description	100213090	100413090
Outlet	3	3
USB	2	N/A
Universal outlet (RJ45+RJ11)	1	2
Finish	black	black



- + 10' (3 m) grounded power cord
- + Diameter: 4 11/32" (110 mm)

Richelieu's Power Station with USB

Description	201314100	201114100
Outlet	3	1
USB	2	2
Length	10 3/8" (264 mm)	5 7/8" (149 mm)
Width	4 1/4" (108 mm)	4 1/4" (108 mm)
Finish	gray	gray



DISPLAYS

Richelieu's wall-mounted lighting display

Product
1911601



The following items all come pre-mounted on a white panel display board, ready for installation in your showroom:

- + LED Skate in neutral white light output N° 109124030 (1 unit)
- + LED Kite in warm white light output N° 108122010 (1 unit)
- + LED Folio in neutral white light output N° 1091240109 (1 unit)
- + LED Cubik in cool white light output N° 460121170
- + The two necessary power supplies, N° 51215 and N° 7779
- + Brackets with mounting kit for installation

Richelieu's table top display

Product
DPTABLE

Richelieu makes it easy to add lighting to any showroom with this perfect tabletop display.

Display includes:

- + Sturdy base and convenient handle slot
- + 12" Linea with Power Supply
- + 12" Piccolo with Power Supply on separate on/off switch
- + Invoke swivel, Invoke black, and Pro with power supply and 3-step touch dimmer





Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

Legend



Diameter



Width



Height



Depth



Drill Hole



Degree
of Swivel



Average
Life



Energy Efficient



Dimmable



Touch Function



Battery Operated



Motion Sensor



USB



Included Product(s)



Attention!

Items to consider when creating
your lighting environment.



Used with...

Shows the versatility
of this accessory.

Index

Product	Page	Product	Page	Product	Page	Product	Page	Product	Page	Product	Page	Product	Page	Product	Page	Product	Page
1620	57	504602	22	3221212	14	16512736	21	76491312	39	100213090	60	235325083	59	766490600	40	712L124	22
1635	57	504620	22	3221239	14	26121090	27	76491313	39	100220130	46	235325090	59	1012500195	52	712T121	22
2500	58	504640	22	3221298	14	26121100	27	76492012	39	100220140	46	235325100	59	1081220109	8	712T122	22
3121	58	504679	22	4253506	59	26512712	21	76492013	39	100220170	46	235601083	59	1081220222	8	712T124	22
3251	58	512121	30	4253506	31	30141210	23	76492200	39	100313090	60	235601090	59	1081240109	8	712X121	22
7510	57	512122	30	4301030	33	30142010	23	76492201	39	100410170	60	235601100	59	1081240222	8	712X122	22
7516	57	612121	12	4301170	32	30145300	23	76492202	39	100413090	60	235603083	59	2641220412	21	712X124	22
7517	57	612122	12	4301320	34	33012001	25	76492203	39	100420170	60	235603090	59	2641221024	21	71520AB	50
7560	57	624030	48	4301620	34	33012020	25	76493400	39	100430170	60	235603100	59	2641240412	21	73550AB	51
7563	57	711030	46	5012121	30	33012040	25	76493401	39	100492090	60	235604083	59	2641241024	21	73550ORB	51
7637	39	711090	46	5012122	30	33012079	25	76493402	39	100492140	60	235604090	59	2651220412	21	7425T742	30
7639	39	712030	46	5042090	22	33012098	25	76493403	39	100492185	60	235604100	59	2651221024	21	7425X742	30
7660	57	712090	46	5044090	22	41970510	37	76494300	39	101121170	13	237599083	59	2651240412	21	788D18	55
7779	55	712121	22	5047990	22	41980510	37	76494301	39	101122170	13	237599090	59	2651241024	21	79990D06	38
7880	55	712122	22	6240195	48	41990510	37	76494302	39	101250030	52	237599100	59	2651270306	21	79990D12	38
7890	55	712124	22	6440030	48	42535030	31	76494303	39	108120410	7	300135030	31	2661220412	21	79990D24	38
8990	54	742120	30	7110140	46	42535195	31	76495900	39	108120450	7	300135195	31	2661221024	21	79990D36	38
10590	53	784030	58	7110170	46	50460121	22	76495901	39	108120560	7	310127000	54	2661240412	21	79990D72	38
14512	25	784190	58	7120140	46	50460122	22	76495902	39	108120600	7	310127880	54	2661241024	21	79990L06	38
14540	25	788140	55	7120170	46	50460124	22	76495903	39	108120860	7	310127888	54	3131220108	14	79990L12	38
14579	25	788170	55	7152030	50	50812121	30	76690000	40	108120900	7	310127889	54	3131220212	14	79990L24	38
30130	53	899040	55	7155040	56	50812122	30	76690006	40	108121160	7	310127898	54	3131222412	14	79990L36	38
30190	53	899040	55	7155079	56	51812121	30	76690012	40	108121200	7	310127899	54	3131240108	14	79990L72	38
30590	53	899079	55	7220170	45	51812122	30	76690020	40	108122010	6	313121170	13	3131240212	14	79990R06	38
30624	54	899079	55	7240030	51	64400139	48	76690040	40	108124010	6	313122170	13	3131242412	14	79990R12	38
31221	58	1001090	47	7355030	51	64400175	48	76690079	40	109122030	5	314121170	13	3221220308	14	79990R24	38
31225	58	1001170	47	7425742	30	64400195	48	76691300	40	109124030	5	314122170	13	3221220412	14	79990R36	38
31225	25	1003030	52	7641030	39	71202030	22	76691308	40	110122010	26	316121090	15	3221240308	14	79990R72	38
31225	25	1003090	52	7641330	39	71202090	22	76692300	40	110122185	26	316121170	15	3221240412	14	79990U06	38
32524	54	1003130	52	7642030	39	71204030	22	76692314	40	110124010	26	316122090	15	3301220106	25	79990U12	38
37524	54	1003190	52	7651330	39	71204090	22	76693500	40	118122010	6	316122170	15	3301220208	25	79990U24	38
42535	31	1003230	52	7724030	51	71207930	22	76693521	40	118124010	6	317121090	15	3301220212	25	79990U36	38
50012	30	1003290	52	7724090	51	71207990	22	76694700	40	119122030	5	317121170	15	3301240106	25	79990U72	38
51201	30	1003930	52	10016012	47	71242030	22	76694728	40	119124030	5	317122090	15	3301240208	25	90450-E13	42
51215	54	1003990	52	10018090	47	71242090	22	77481501	44	145121090	25	317122170	15	3301240212	25	90450-E24	42
51230	54	1020060	48	10018170	47	71244030	22	77481901	44	145121195	25	322122412	14	4084121090	36	90450-E36	42
51278	54	1020450	51	10022030	46	71244090	22	77482101	44	145122090	25	322124412	14	4511240006	54	90450-E48	42
71550	56	1020550	48	10022090	46	71247030	22	77482201	44	145122195	25	361121170	29	4511240012	54	90450-E60	42
76636	55	1020700	51	10030130	52	71247030	22	77482301	44	154121170	17	361122170	29	4511240020	54	94E1018090	42
76672	55	1086030	35	10030140	52	71247930	22	77482401	44	154122170	17	366121170	20	4511240040	54	94E1424090	42
78130	58	1087030	35	10030195	52	71247990	22	77482801	44	155121090	17	366122170	20	4511240070	54	94E1424100	43
78818	55	1087906	35	10031130	52	71520140	50	77491530	44	155121170	17	377121090	15	4511240413	11	94E2136090	42
100140	47	1112130	46	10031140	52	71520195	50	77491930	44	155122090	17	377121170	15	4511240823	11	94E2136100	43
100179	47	1112140	46	10031195	52	71851430	32	77492130	44	155122170	17	377122000	15	4511241435	11	94E2848090	42
100461	60	1112170	46	10032130	52	71851490	32	77492330	44	155123170	24	377 122 090	15	4511241847	11	94E2848100	43
101050	57	1452412	56	10032140	52	72400140	51	77492390	44	156121170	16	419705170	37	5121512413	9	94ELS0618100	27
101140	53	1551018	55	10032195	52	72400195	51	77493190	44	156122170	16	419805170	37	5121512414	10	94ELS0824100	27
102065	50	1551090	55	10039140	52	73550140	51	77494390	44	159121010	12	419905170	37	5121512415	9	94ELS1436100	27
103140	53	1551170	55	10039140	52	73550195	51	79981208	38	159122010	12	455121010	18	5121512416	10	94ELS1848100	27
105140	53	1551218	55	10039195	52	74201742	30	79982314	38	201114100	60	455122010	18	7423812742	30	94ES1424100	43
131230	41	1911601	60	10041090	60	74212742	30	79983421	38	201121170	20	456121140	19	0-10890	58	94ES2136100	43
221190	60	2089090	28	10042090	60	75000195	49	79984628	38	201122170	20	456122140	19	0-110	52	94ES2848100	43
300135	31	2651200	21	10043090	60	76490000	39	79985935	38	201314100	60	457121140	18	0-1250	57	DC413M41	58
301140	53	2651201	21	10045190	60	76490008	56	79990000	38	231104083	59	457121185	18	0-1250	50	DPTABLE	60
305140	53	2651236	56	10045290	60	76490012	56	79990006	38	231104090	59	457122140	18	0-1620	48	PF3411	59
431190	60	2651240	21	10046190	60	76490024	56	79990012	38	231104100	59	457122185	18	0-1635	48	PF3430	59
431290	60	2651245	21	10201000	57	76490048	56	79990024	38	231451083	59	460121170	19	1020400E	57		
431390	60	2651260	56	10880229	6	76490072	56	79990036	38	231451090	59	460122170	19	500T121	30		
431490	60	2651279	21	10880335	6	76490100	56	79990872	38	231451100	59	742312742	30	500T122	30		
500120	30	2652412	56	10880441	6	76490200	56	79991208	38	231453083	59	744121030	33	500X121	30		
500121	30	3131201	14	10880554	6	76490300	56	79992314	38	231453090	59	744121090	34	500X122	30		
500122	30	3131212	14	15514170	17	76490400	56	79993421	38	231453100	59	744122040	34	6240AB	48		
500420	30	3131239	14	15552090	17	76490500	56	79994628	38	235320083	59	744122090	34	6240ORB	48		
501140	53	3131298	14	15552170	17	76491012	39	79995935	38	235320090	59	744124040	34	712L121	22		
504600	22	3221201	14	15662170	16	76491013	39	82123040	28	235320100	59	744124090	34	712L122	22		

CANADA

Tel.: 1 800 361-6000
Fax: 1 800 363-0193

ALBERTA

Calgary
Edmonton

BRITISH COLUMBIA

Kelowna
Vancouver
Victoria

MANITOBA

Winnipeg

NEW BRUNSWICK

Moncton

NEWFOUNDLAND

St. John's

NOVA SCOTIA

Halifax

ONTARIO

Barrie
Kitchener
Mississauga
Ottawa
Sudbury
Thunder Bay
Toronto

QUÉBEC

Laval
Montréal
Québec

SASKATCHEWAN

Regina
Saskatoon

USA

Tel.: 1 800 619-5446
Fax: 1 800 876-7454

CONNECTICUT

Hartford

FLORIDA

Dania Beach
Hialeah
Jacksonville
Orlando
Pompano Beach
Riviera Beach
Sarasota
Tampa

GEORGIA

Atlanta
Savannah

ILLINOIS

Chicago

INDIANA

Indianapolis

KENTUCKY

Louisville

MASSACHUSETTS

Boston

MICHIGAN

Detroit

NEW JERSEY

Avenel
Lincoln Park

NEW YORK

New York
Syracuse

NORTH CAROLINA

Charlotte
Greensboro
Raleigh

OHIO

Cincinnati

SOUTH CAROLINA

Greenville

TENNESSEE

Nashville

WASHINGTON

Seattle

