


Toner Cartridge Bag


The Toner Cartridge Bag is an opaque construction that provides moisture barrier protection. This bag features a tough polyester outer layer, an aluminum layer for moisture protection, and a heat sealable black polyethylene. Open Top and ZipTop reclosable styles are available.

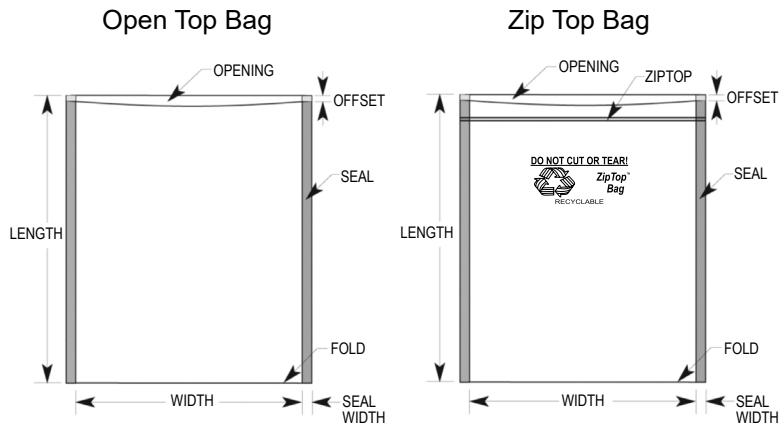

Tolerance: Width $-0, +1/4$ "
 Length $\pm 1/8$ " Offset 0 to $1/4$ "
 Seal width $3/8$ " with a tolerance of $\pm 1/8$ "

Polyester

Aluminum Shield



Heat Sealable
Polymer

RoHS, REACH and Conflict Minerals, Statement

See the SCS RoHS, REACH, and Conflict Minerals Statement:
http://staticcontrol.com/PDF/Regulatory_Statement_SCS_Bags.pdf

See the SCS Limited Warranty:

StaticControl.DescoIndustries.com/Limited-Warranty.aspx

Physical	Typical Value	Testing Method
Moisture Vapor Transmission Rate (MVTR)	< 0.05 grams/100 sq. in./24 hrs.*	MIL-STD-3010C Method 3030
Tensile Strength	6000 PSI, 41 MPa	ASTM D882
Puncture Resistance	13 lbs, 58 N	MIL-STD-3010 Method 2065
Seal Strength	11 lbs, 49 N	ASTM D882
Thickness	1.9 mils, 0.05 mm $\pm 15\%$	MIL-STD-3010 Method 1003
Heat Sealing Conditions		Typical Value
Temperature	250°F – 400°F, 121°C – 190°C	
Time	0.5 – 3.0 seconds	
Pressure	30 – 60 PSI, 206 – 414 KPa	

*Standard deviation of 0.007 grams/100 sq. in./24 hrs.

Bag is free of amines, silicones and heavy metals.

This product is intended for commercial use only. This product is not on the Qualified Product Listing under the Defense Standardization Program.

Specifications and procedures subject to change without notice.

TONER CARTRIDGE BAG		
926 JR Industrial Drive, Sanford, NC 27332 WEB SITE: StaticControl.com PHONE (919) 718-0000	DRAWING NUMBER TONER CARTRIDGE BAGS	DATE September 2021

