CUSHIONED STATIC SHIELDING FILM





Electrical Properties

Static Control Properties

Packaging Materials for ESD Sensitive Items Static Control Film - Level 3 (except transparency) Meets Requirements of:

ANSI/ESD S541 (ANSI/ESD S20.20) ANSI/ESD S11.4

Typical Values Test Procedures/Method

 Surface Resistance:
 Outer Surface
 1 x 10⁴ to < 1 x 10¹¹ ohms
 ANSI/ESD STM11.11

 Inner Surface
 1 x 10⁴ to < 1 x 10¹¹ ohms
 ANSI/ESD STM11.11

 Discharge Shielding
 <20 nJ</td>
 ANSI/ESD STM11.31, EIA 541

Physical Properties

Material Thickness:


Thickness Nominal 0.150" (3.8mm) ±10% MIL-STD-3010, 1003
Puncture Resistance >20 lbs MIL-STD-3010, 2065

Cleanliness

Silicone Not detected ASTM E 168

Chemical Properties

Film is free of amines, N-octanoic acid, silicones and heavy metals.

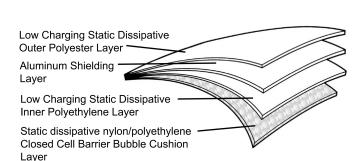

Tolerances: Width ± 0.25" Length -0 yd, +10 yd

ANSI/ESD S541 Section 6.2 Outside an EPA

"Transportation of sensitive products outside of an EPA shall require packaging that provides:

- 1. Low charge generation
- 2. Dissipative or conductive materials for intimate contact
- 3. A structure that provides electrostatic discharge shielding."

This product is intended for commercial use only. This product is not on the Qualified Product Listing under the Defense Standardization Program.

RoHS 2, REACH and Conflict Minerals Statement

None of the RoHS 2 restricted materials, or REACH substances of very high concern as of 2017/01/12, or Conflict Minerals are intentionally added in manufacturing this product. Ref: European Directive 2011/65/EC Article 4.1. and Regulation (EC) No. 1907/2006/CE. See SCS Warranty, Limitation of Liability and Remedies



Mixed Unsortable Plastic Scrap

Mixed unsortable plastic scrap shall contain assorted plastics of multiple grades that are co-extruded, bonded or laminated together which are unsortable into individual grades

SCS film is recyclable



Specifications and procedures subject to change without notice.

CUSHIONED STATIC SHIELDING FILM



926 JR Industrial Drive, Sanford, NC 27332

WEB SITE: StaticControl.com PHONE (919) 718-0000 DRAWING NUMBER 2300R Film June 2017