

INSTALLATION INSTRUCTIONS


SSB-023, SSM-023, SLB-023 and SLM-023 Interface Brackets

SSB-023, SSM-023, SLB-023 and SLM-023 Interface Brackets are designed for use with Chief® Series Projector Mounts. See the specific installation instructions provided with the mount for additional installation information.

Unpack carton and verify kit contents. If any listed parts are missing, immediately contact a Chief Customer Service representative.

WARNING: IMPROPER INSTALLATION CAN LEAD TO EQUIPMENT FALLING CAUSING SERIOUS PERSONAL INJURY AND DAMAGE TO EQUIPMENT! DO NOT substitute hardware. Use only hardware supplied by manufacturer!

- | | |
|-----------------------------|---|
| (1) Interface Bracket | (4) Screw, Phillips Pan Head, Machine, M4 x 8mm |
| (6) 10-24 Thumb Nuts ** | (1) Screw, Phillips Flat Head, Machine, M4x 20mm **** |
| (1) All-Points Security Kit | (1) 1/2" x .194" x 3/8" Nylon Spacer **** |
| | (4) Washer, Flat, M4 |

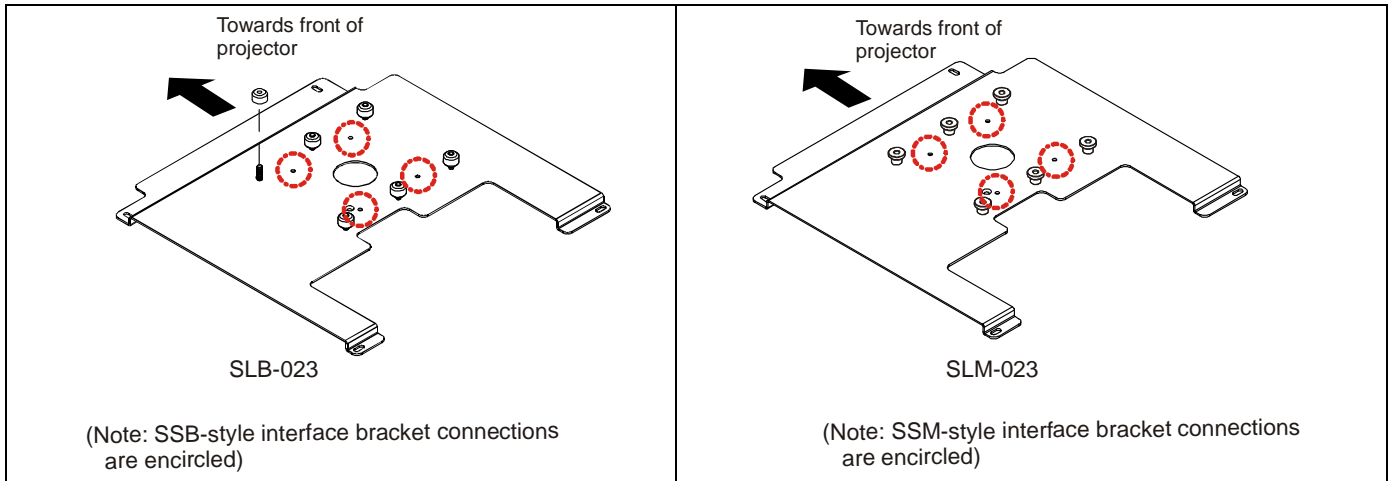

Only used when installing SLB/SSB interface brackets. **Used when mounting surface of projector is recessed.

NOTE: Specific to SSB-style and SSM-style interface bracket installation, all appropriate screws come pre-installed as reflected in the encircled locations above. DO NOT attempt to substitute and USE ONLY this pre-installed hardware for SSB-style and SSM-style interface bracket installation.

Installation Instructions

WARNING: OVER TIGHTENING OF SCREWS CAN DAMAGE PARTS AND CAN LEAD TO SERIOUS PERSONAL INJURY AND DAMAGE TO EQUIPMENT! DO NOT over tighten screws when installing interface bracket.

NOTE: Step 1 is only required when installing an SLB/SSB interface bracket. If an SLM/SSM bracket is being installed, proceed to step 2.

1. Screw thumb screws onto 10-24 x 5/8" Phillips pan head screws. DO NOT fully tighten thumb screws at this time.
2. Turn projector upside down.
3. Place 3/8" spacer over center-threaded insert in bottom of projector.
4. Place interface bracket onto projector bottom, align center hole in bracket with spacer and the mounting holes in bracket with threaded inserts in projector.
5. Place M4 x 20mm Phillips flat head screw over center-mounting hole (leave loose).
6. Using M4 x 8mm Phillips pan head screws with M4 flat washers and the M4 x 20mm Phillips flat head screw, secure interface bracket to projector. Tighten all fasteners at this time.

NOTE: Security screws can be substituted when mounting interface bracket to projector by using the parts and installation instructions in the All-Points Security Kit.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved.

Milestone AV Technologies, and its affiliated corporations and subsidiaries (collectively, "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

CHIEF
Our Mounts. Your Vision.

Chief Manufacturing, a products division of Milestone AV Technologies
8401 Eagle Creek Parkway, Savage, MN 55378
• P: 800.582.6480 / 952.894.6280 • F: 877.894.6918 / 952.894.6918

8850-000020 Rev01
©2009 Milestone AV Technologies,
a Duchossois Group Company

05/09

Touchboards
205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

