


SMART Board® 6000S Pro series

SBID-6065S-CPW

SBID-6075S-CPW

SBID-6086S-CPW

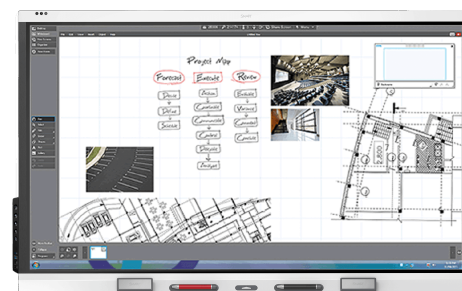

DISPLAY

Screen sizes (diagonal)	65", 75", 86"
Backlight	LED
Aspect ratio	16:9
Maximum display resolution	4K UHD (3840 × 2160)
Refresh rate	60 Hz
Lifespan	≥ 50,000 hours
Brightness (maximum)	≥ 350 cd/m ²
Response time	≤ 8 ms
Viewing angle	178°
Glass	Fully heat-tempered, anti-glare
Glass thickness	4 mm
Frame color	White
Convenience buttons	Power, home, volume, screen shade, freeze frame
Sensors	Proximity, ambient light, infrared, room temperature and humidity ¹
Audio	2 integrated 20 W speakers

INTERACTIVE EXPERIENCE

Touch technology	HyPr Touch™ with InGlass™
Touch features	Tool Explore™ Simultaneous Tool Differentiation™ Object Awareness™ Pen ID™ Silktouch™
Typical response time	9 ms
Frame rate	150 Hz
Accuracy	1.5 mm (over 90% area)
Minimum object size	5 mm
Multitouch capabilities	20 – Windows® and Mac 10 – Chrome OS™
Tools included	Pens (×2) Erasers (×2)
Tool holders	Intelligent, magnetic, frame-mounted
Optional tools	Multicolor four-pen bundle

SOFTWARE

SMART Meeting Pro® Room license	Included with purchase of a SMART Pro Service Plan
SMART Meeting Pro Personal licenses (×10)	Included with purchase of a SMART Pro Service Plan
SMART TeamWorks™ Room edition subscription	Included with purchase of a SMART Pro Service Plan
SMART Ink® and SMART Product Drivers	Included

smarttech.com
smarttech.com/contact

© 2021 SMART Technologies ULC. All rights reserved. SMART Board, SMART Meeting Pro, SMART TeamWorks, SMART Ink, HyPr Touch, Tool Explorer, Simultaneous Tool Differentiation, Object Awareness, Pen ID, Silktouch, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. The Adopted Trademarks HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: www.smarttech.com/patents. Models and specifications may vary by region. Please contact your local representative for details. Contents are subject to change without notice. May 19, 2021.

¹Temperature and humidity data is not available when iQ features are disabled.

PC COMPUTING

OPS support	✓
OPS-C support	✓
PC module power supported OPS	60 W
Optional computing modules	SMART OPS PC with Windows 10 Pro SMART Chromebox

INPUTS	Front	Back
OPS PC accessory slot (60 W devices)	–	1
HDMI® 2.0 with HDCP 1.4 and HDCP 2.2 support	1	2
VGA video	–	1
Stereo 3.5 mm	–	1
RS-232	–	1
RJ45	–	2
USB Type-C 4K @60Hz Display Port Alternate Mode, USB3 Dual Role Data Transfer Functionality, touch, and digital audio; 60W power delivery	1	–
USB 2.0 Type-A	–	1
USB 3.0 Type-A	1	1
USB 3.0 Type-B	1	3

OUTPUTS	Front	Back
HDMI 2.0	–	1
Stereo 3.5 mm	–	1
S/PDIF	–	1
RS-232	–	1

INCLUDED CABLES AND ACCESSORIES	Qty
Country-specific power cable	1
16' 5" (5 m) USB 2.0 cable	1
Pens (red and black)	2
Erasers	2
External dual-band 2.4 and 5 GHz antennae	2
Remote control	1
AAA batteries	2
WM-SBID-200 wall mount	1
Illustrated installation instructions	1
Important information document	1

CONNECTIVITY

Wired	RJ45 (x2) 100baseT
--------------	--------------------

STORAGE AND OPERATING REQUIREMENTS

Power requirements	100V to 240V AC, 50 Hz to 60 Hz
Operating temperature	41–95°F (5–35°C)
Storage temperature	–4–140°F (–20–60°C)
Humidity	5–80% relative humidity, non-condensing

POWER CONSUMPTION

Typical	65": 92 W 75": 141 W 86": 172 W
Standby	< 0.5 W

CERTIFICATION AND COMPLIANCE²

US / Canada	UL, FCC, ISSED, CONEG Packaging, Proposition 65
EU / EEA / EFTA / UK	CE, UKCA, LVD, CB, EMCD, RED, REACH, RoHS, Battery, WEEE, Packaging, POP, Ecodesign
Australia / New Zealand	RCM
Performance standards	ENERGY STAR®, HDMI

PURCHASING INFORMATION

Order number: SBID-6065S-CPW	SMART Board 6065S-C Pro interactive display – White
Order number: SBID-6075S-CPW	SMART Board 6075S-C Pro interactive display – White
Order number: SBID-6086S-CPW	SMART Board 6086S-C Pro interactive display – White
Order number: TS-4PEN-MC	Tool Explorer multicolor 4-pen bundle (orange, purple, green, blue) with magnetic penwell
Optional accessories	See smarttech.com/accessories

WARRANTY

SMART Assure warranty	Includes advanced hardware replacement and access to onsite support. Terms and conditions vary by region. Contact your local reseller or distributor for information and visit smarttech.com/warranty .
------------------------------	--

²Product availability may vary by region.

This product has received additional certifications not listed here.

CABLE REQUIREMENTS

HDMI	Certified premium high speed HDMI (18 Gbps) Maximum length: 23' (7 m)
USB 2.0	USB 2.0 certified Hi-Speed (480 Mbps) support Maximum length: 16' (5 m)
USB 3.0	USB 3.0 certified SuperSpeed (5 Gbps) support Maximum length: 9' (3 m)
USB Type-C	USB 3.2 Gen 1 certified SuperSpeed (5 Gbps) support Maximum length: 6' (2 m)
More information	See smarttech.com/kb/171414


INSTALLATION, DIMENSIONS, AND WEIGHTS

NOTES

- All dimensions $\pm 1/8"$ (0.3 cm). All weights ± 2 lb. (0.9 kg).
- Product ships upright.

SBID-6065S-CPW

Dimensions

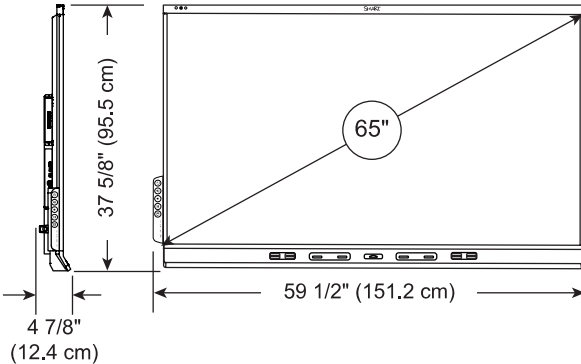

Weight

114 lb. (51.5 kg)

Shipping dimensions (including pallet)

67 1/8" $\times$ 46 1/2" $\times$ 10 3/8"
(170.4 cm $\times$ 118.1 cm $\times$ 26.4 cm)

Shipping weight

157 lb. (71 kg)

VESA mount


M8, 600 $\times$ 400 mm

Handles

2

SBID-6075S-CPW

Dimensions

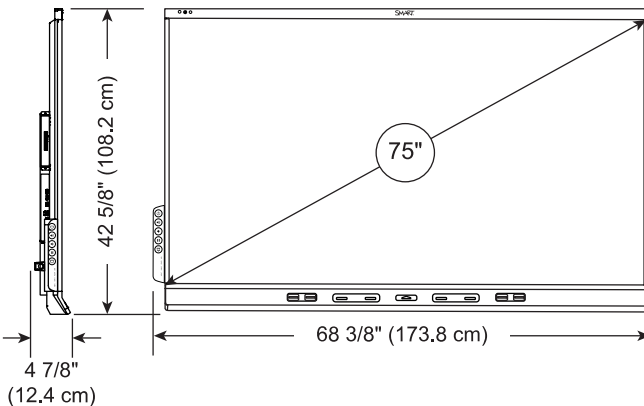

Weight

143 lb. (65 kg)

Shipping dimensions (including pallet)

76" $\times$ 51 1/2" $\times$ 10 3/8"
(193.1 cm $\times$ 130.8 cm $\times$ 26.4 cm)

Shipping weight

187 lb. (85 kg)

VESA mount


M8, 600 $\times$ 400 mm

Handles

2

SBID-6086S-CPW

Dimensions

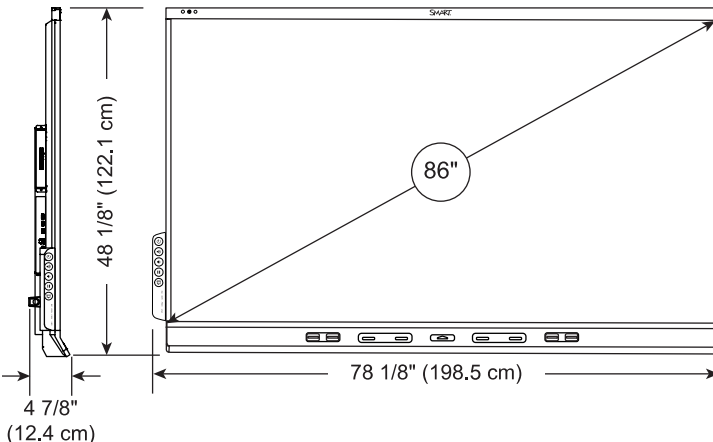

Weight

186 lb. (84.5 kg)

Shipping dimensions (including pallet)

86" $\times$ 57" $\times$ 10 3/8"
(218.6 cm $\times$ 144.7 cm $\times$ 26.4 cm)

Shipping weight

240 lb. (109 kg)

VESA mount

M8, 600 $\times$ 400 mm

Handles

2