




# SP323 Clamp Type Temperature Probe

### Features:


- Temperature Range: -40 to +185 °F (-40 to +85 °C)
- Clamp Range: 1/4 inch to 1 1/2 inch (6mm to 38mm)
- Connect to Smart Device and use with the TPI View App
- Temperature measurement on air conditioning, heating, and refrigeration systems
- View "LIVE" Temperature Readings and instantly Save, e-mail and/or Print them
- Save, e-mail and/or Print "Differential" Temperature readings with one or two SP323 probes
- Perform, Save, e-mail and/or Print differential temperature readings such as Radiator Balancing or Flow & Return on Boilers or Heat Pumps
- Remote Data Logging Function with Multiple instruments logging at the same time
- Store ALL GPS tagged Test Results within the TPI View Job Management
- Use in conjunction with the SP670 high pressure smart probe to perform Superheat and Subcooling measurements

## Clamp Type Temperature Probe

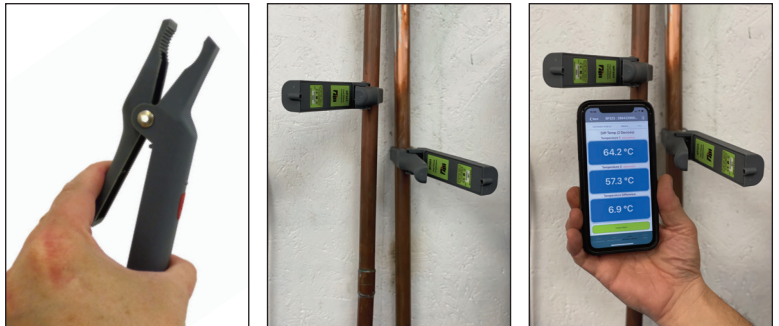

### TPI View App


powerful App to use with TPI Smart Probes for HVAC applications.

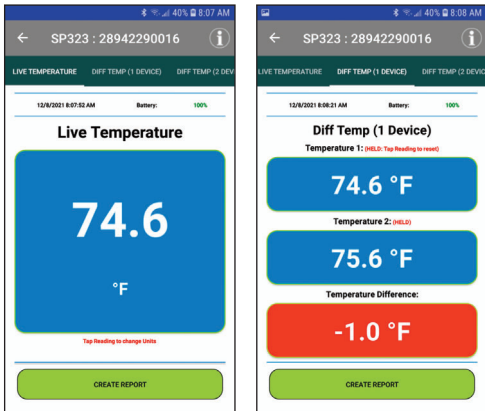

Scan the code, get the FREE App



Temperature Range	-40°F to 185°F (-40°C to 85°C)
Clamp Pipe Size	1/4 inch to 1 1/2 inch (6mm to 38mm)
Resolution	0.1°F / 0.1°C
Accuracy	32°F to 185°F (0°C to 85°C) = +/- 0.9°F (+/- 0.5°C) <32°F (<0°C) = +/-1.8°F (+/-1.0°C)
Data Logging	10,000 readings in 1 sec to 59 min 59 sec intervals
Battery Life	Approximately 170 hours
Battery Type	AAA x 3 alkaline
Operating Temperature	-4 °F ~ 140 °F (-20 °C ~ 60 °C)
Storage Temperature	About 170 hour.
Humidity	0 ~ 80 %RH
Weight	5.64oz (160g)
Bluetooth	5.0 (350 foot range depending on obstacles)



IC (Industry Canada) ID: 5123A-BGM113



Test the TPI Advantage: Value, Performance, Service, Safety

[www.testproductsintl.com](http://www.testproductsintl.com) 800-368-5719