


## Magnetic mounting bases

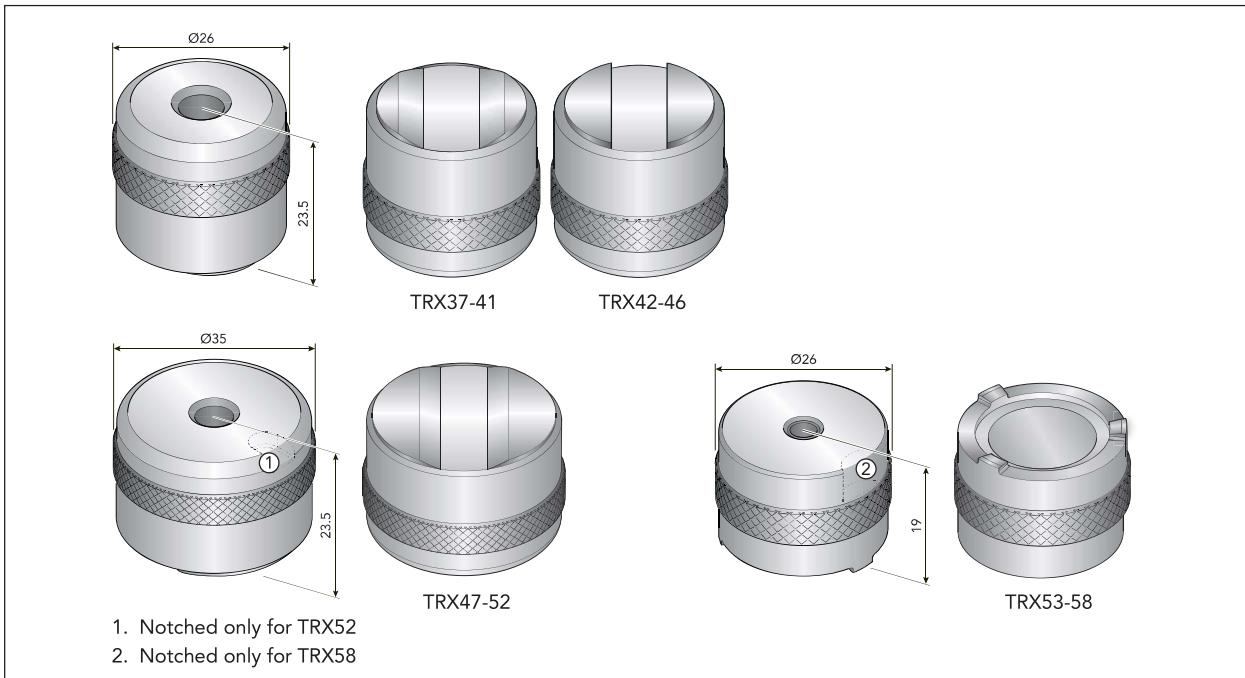

Two-rail, 25 mm diameter, 13 kg (29 lbs) pull strength

The two rail type magnetic mounting bases are usually utilized on curved surfaces, such as motor and compressor housings, although they are also suitable for flat surfaces.

TRX37	Magnetic mounting base, M6
TRX38	Magnetic mounting base, M8
TRX39	Magnetic mounting base, M10
TRX40	Magnetic mounting base, UNF 1/4
TRX41	Magnetic mounting base, UNC 5/16

Flat, 25 mm diameter, 13 kg (29 lbs) pull strength

The flat magnetic mounting bases are optimal for smooth, flat surfaces.

TRX42	Magnetic mounting base, M6
TRX43	Magnetic mounting base, M8
TRX44	Magnetic mounting base, M10
TRX45	Magnetic mounting base, UNF 1/4
TRX46	Magnetic mounting base, UNC 5/16

Two-rail, 35 mm diameter, 25 kg (55 lbs) pull strength

The two rail type magnetic mounting bases are usually utilized on curved surfaces, such as motor and compressor

housings, although they are also suitable for flat surfaces. A large diameter enables magnetic mounting on two heat sinks for an electric motor, for example.

TRX47	Magnetic mounting base, M6
TRX48	Magnetic mounting base, M8
TRX49	Magnetic mounting base, M10
TRX50	Magnetic mounting base, UNF 1/4
TRX51	Magnetic mounting base, UNC 5/16
TRX52	Magnetic mounting base for triaxial transducers, UNF 10-32

Three-rail, 25 mm diameter, 10 kg (22 lbs) pull strength

The three rail type magnetic mounting base are usually utilized on curved or uneven surfaces.

TRX53	Magnetic mounting base, M6
TRX54	Magnetic mounting base, M8
TRX55	Magnetic mounting base, M10
TRX56	Magnetic mounting base, UNF 1/4
TRX57	Magnetic mounting base, UNC 5/16
TRX58	Magnetic mounting base for triaxial transducers, UNF 10-32

## Technical specifications

Material: stainless steel  
Temperature: up to 100 °C  
Grip: knurled edge

## Options

16065 Mounting disc for 26 mm diameter magnetic mounting base (TRX37-46 and TRX53-58)  
18033 Mounting disc for 35 mm diameter magnetic mounting base (TRX47-52)