

SR555E



 Display size
40"-55"

 Max load
75lb (43.1kg)
per display

Additional Features

- ✓ Displays can be located anywhere along the column for perfect viewing height (up to 60" at center)
- ✓ Integrated cable management protects, contains and conceals cables for a clean, professional installation
- ✓ Maneuvers easily on 4" (102mm) swivel casters, two locking
- ✓ Corner bumpers protect walls and doorways from damage
- ✓ Fully welded base structure provides rigidity, stability and quick assembly
- ✓ Textured black powder coat finish helps to hide finger prints and dust while stainless steel accents provide an attractive appearance
- ✓ Open frame adaptor design to help prevent display component input interference
- ✓ Upright structure houses components in either 2RU 19" rack mount configuration or a shelf inside the lockable compartment
- ✓ 6 Outlet surge protector with 15ft cord housed inside the enclosure
- ✓ Upper compartment doubles as a work surface for laptops or keyboard/mouse and test monitor
- ✓ Universal mount fits displays with mounting patterns from 200 x 200mm up to 400 x 400mm


SMARTMOUNT®

Flat Panel Video Conferencing Cart

FOR TWO 40" TO 55" DISPLAYS

The SR555E SmartMount® Video Conferencing Cart offers an array of features perfect for any setting where telecommunication is required. The mobility of the cart eliminates the need for multiple video conferencing systems, lowering your overall system cost. The structure is optimized to hold two 40"-55" displays, providing clear visibility for all participants. The camera locates anywhere above either display, for near perfect eye contact during your meetings. A lockable storage area houses all components inside the enclosure and the upper door doubles as a laptop workstation when needed.

The mobility of Peerless-AV's video conferencing carts allows mobile video collaboration in your desired location.

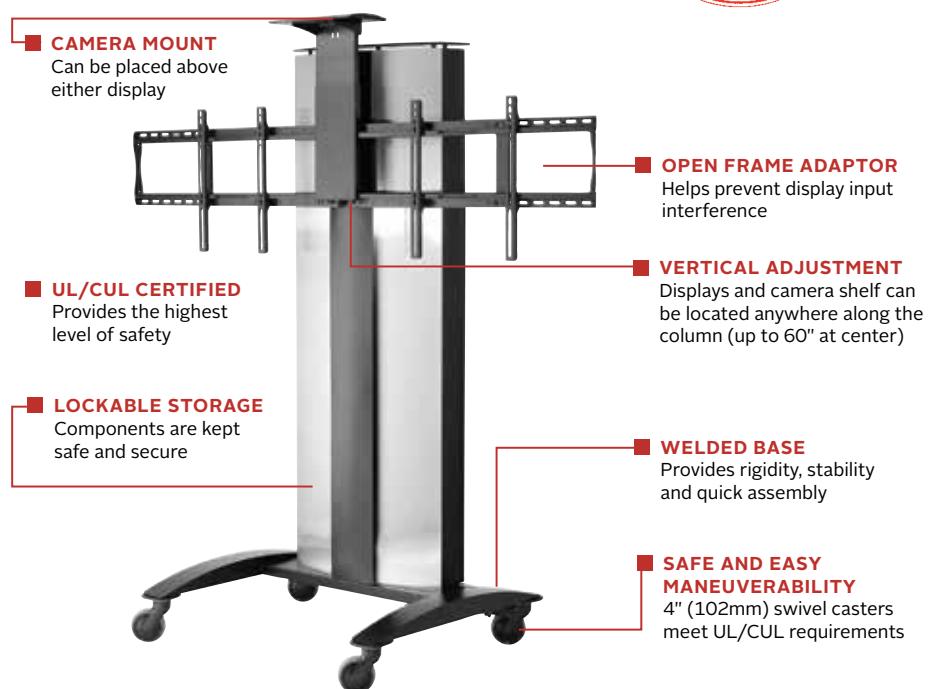

Lockable enclosure



(2) 2RU rack mount locations provide ample space for rack mountable components



Locking upper door provides ideal work surface when open and secured storage when closed



Corner bumpers protect walls and doorways from damage



SR555E SmartMount® Flat Panel Video Conferencing Cart for 40" to 55" Displays

Product Specifications

	DIMENSIONS (W X H X D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
SR555E	70.25" x 78.10" x 29.00" (1784 x 1983 x 737mm)	180lb (81.8kg)	75lb (43.1kg) per display	Textured Powder Coat	Black with brushed stainless steel front

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
SR555E	46.00" X 38.00" X 24.00" (1168 x 965 x 610mm)	195lb (88.6kg)	735029305040	Assembled base, lower storage enclosure, upper storage enclosure, dual screen universal display adaptor, camera shelf, (2) swivel casters, (2) locking swivel casters, (4) base bumpers, hardware & instructions	1


Accessories

ACC310: Feet Accessory
 ACC-GS1E: Tempered Glass Shelf




205 Westwood Ave, Long Branch, NJ 07740
 Phone: 866-94 BOARDS (26273) / (732)-222-1511
 Fax: (732)-222-7088 | E-mail: sales@touchboards.com


All dimensions = inch (mm)

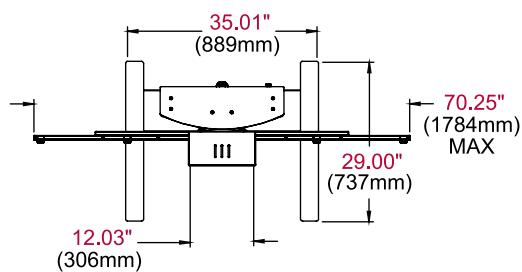


TOP VIEW




TOP INSIDE VIEW

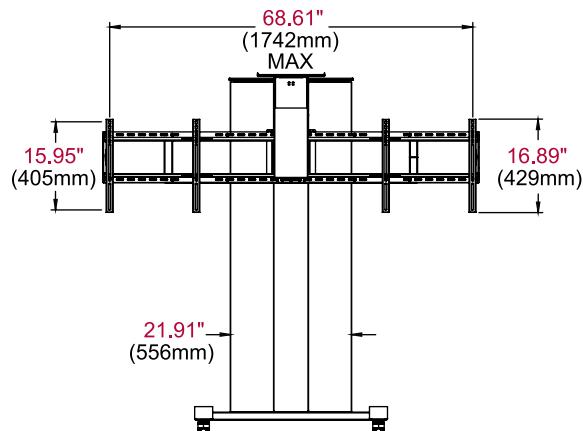

FRONT VIEW

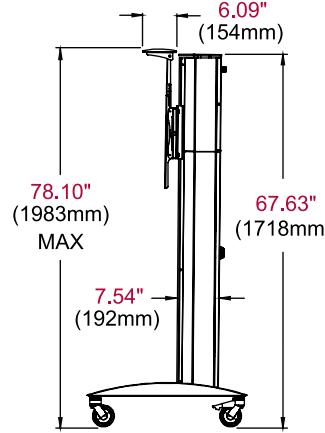

SIDE VIEW

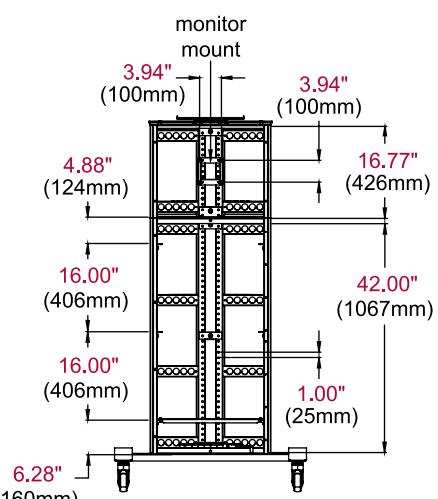

BACK INSIDE VIEW

Architect Specifications

The SmartMount® Flat Panel Video Conferencing Cart shall be a Peerless-AV model SR555E and shall be located where indicated on the plans.. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
 2300 White Oak Circle
 Aurora, IL 60502 USA
(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV Europe
 Unit 3 Watford Interchange
 Colonial Way, Watford
 Herts, WD24 4WP
 United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV de México
 Ave de las Industrias 413
 Parque Industrial Escobedo
 Escobedo, N.L.,
 Mexico 66050
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360

