

SR555M



 Display size
40"-55"

 Max load
75lb (43.1kg)
per display

SMARTMOUNT®

Flat Panel Video Conferencing Cart

FOR TWO 40" TO 55" DISPLAYS


The SR555M SmartMount® Flat Panel Video Conferencing Cart has been designed to include all of the features you may need, making it perfect for any location. The mobility of the cart eliminates the need for multiple video conference systems, lowering your overall system cost. The structure is optimized to hold two 40"-55" displays, providing clear visibility for all participants. The camera locates anywhere above either display, for near perfect eye contact during your meetings. Additionally, the integrated cable management contains and conceals unsightly cables, helping you complete a clean and professional installation.

The mobility of Peerless-AV's video conferencing carts allows mobile video collaboration in your desired location.



Additional Features

- ☒ Display can be located anywhere along the column for perfect viewing height (up to 60" at center)
- ☒ Integrated cable management protects, contains and conceals cables for a clean, professional installation
- ☒ Maneuvers easily on 4" (102mm) swivel casters, two locking
- ☒ Fully welded base structure provides rigidity, stability and quick assembly
- ☒ Textured black powder coat finish helps to hide finger prints and dust
- ☒ Open frame adaptor design to help prevent display component input interference
- ☒ Shelf can be positioned anywhere along the column by simply lifting and repositioning
- ☒ Camera mount can be located anywhere above either display
- ☒ Universal mount fits displays with mounting patterns from 200 x 200mm up to 400 x 400mm

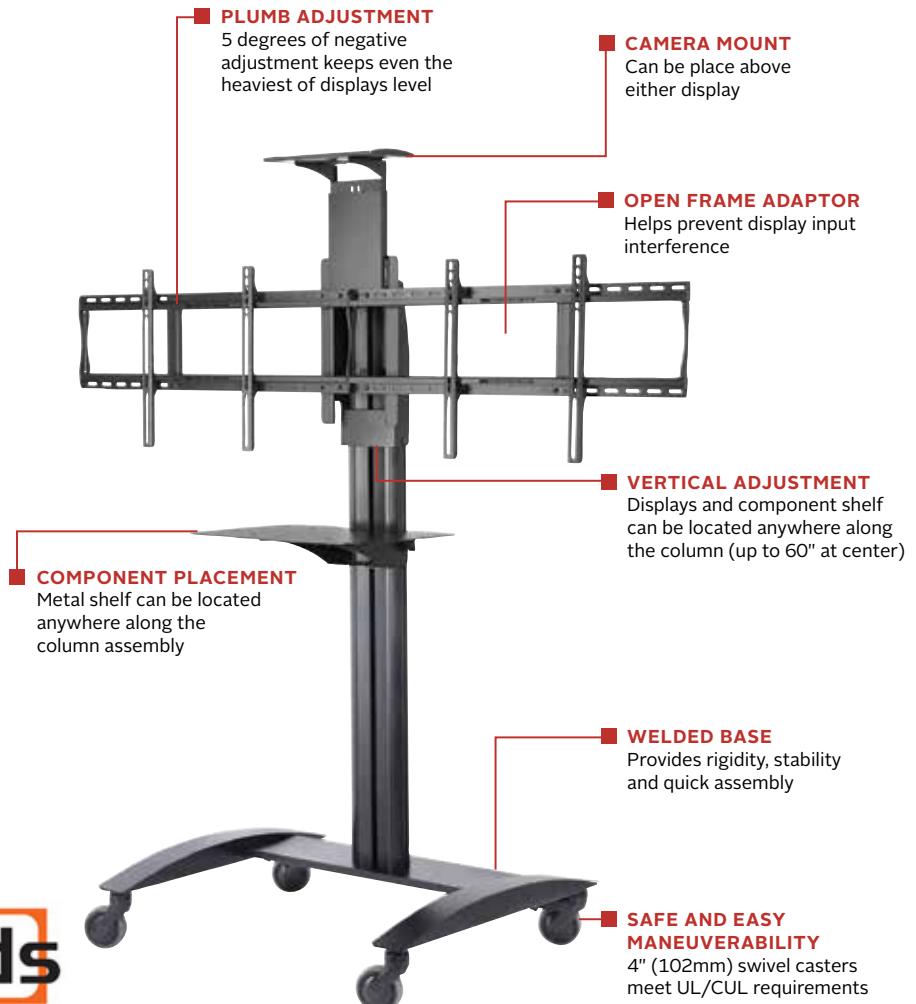

Touchboards



205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

info@peerless-av.com
peerless-av.com

peerless-AV®

SR555M SmartMount® Flat Panel Video Conferencing Cart for 40" to 55" Displays

Product Specifications


	DIMENSIONS (W X H X D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
SR555M	70.25" x 78.10" x 29.00" (1784 x 1983 x 737mm)	90lb (40.9kg)	75lb (34.1kg) per display	Textured Powder Coat	Black

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
SR555M	47.50" x 7.25" x 38.50" (1207 x 184 x 978mm)	98lb (44.5kg)	735029305057	Assembled base, aluminum column, dual screen universal display adaptor, metal component shelf, camera shelf, (2) swivel casters, (2) locking swivel casters, hardware & instructions	1

Accessories

ACC310:	Feet Accessory	ACC-GS1:	Tempered Glass Shelf
ACC316:	Safety Belt	ACC-LA:	Laptop Arm
ACC320:	Electrical Outlet Strip with Cord Wrap	ACC-MS:	Metal Shelf
ACC-BPR:	Bumper Accessory for legs		

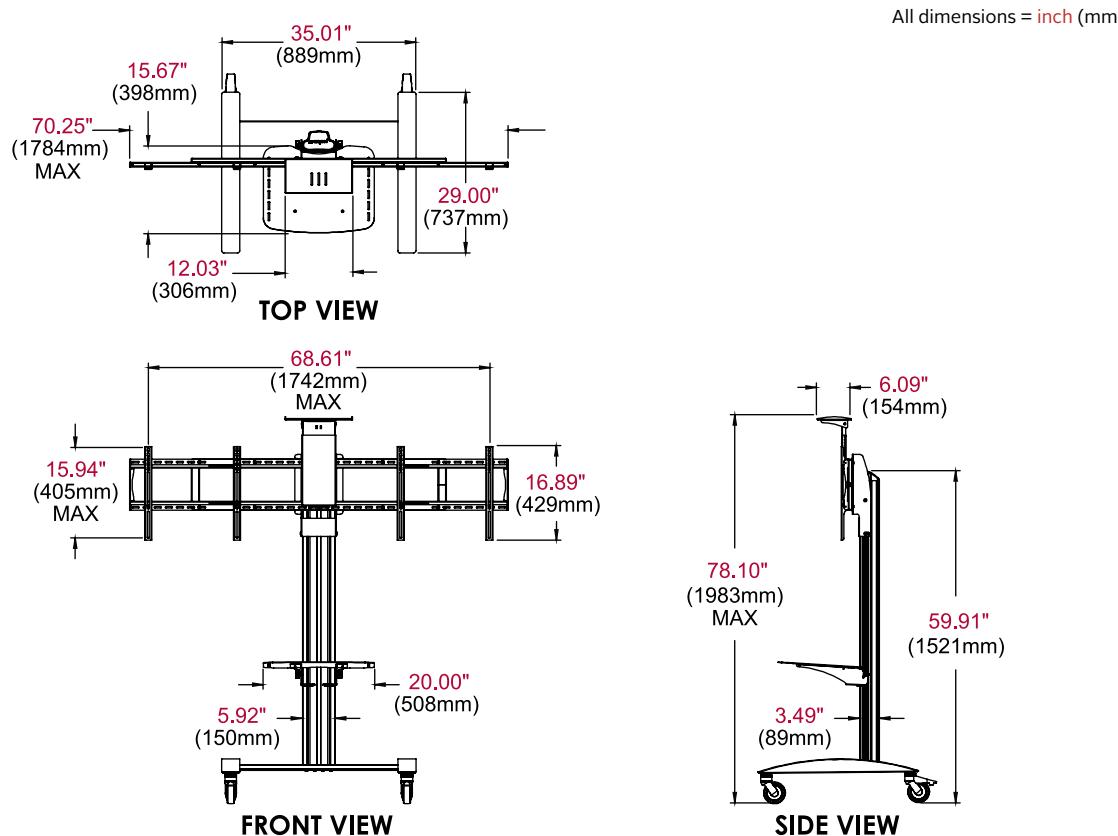

Architect Specifications

The SmartMount® Flat Panel Video Conferencing Cart shall be a Peerless-AV model SR555M and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502 USA
(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV Europe
Unit 3 Watford Interchange
Colonial Way, Watford
Herts, WD24 4WP
United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV de México
Ave de las Industrias 413
Parque Industrial Escobedo
Escobedo, N.L.,
Mexico 66050
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360

peerless-*AV*

LIT-1253 rev.3