


SERIES 2300

DRYWALL/HVAC LIFT

Perfect For One Man Drywall,
Light Fixture & Ductwork Installation

- Solid, safe construction (CE)
- Two speed winch handle
- Quick, tool-free assembly
- One person operation
- Tilts 65° for drywall installation
- Lifts loads of 150 lbs (70 kg)
- Available in 11 ft (3.4 m) & 15 ft (4.5 m) heights
- Lightweight

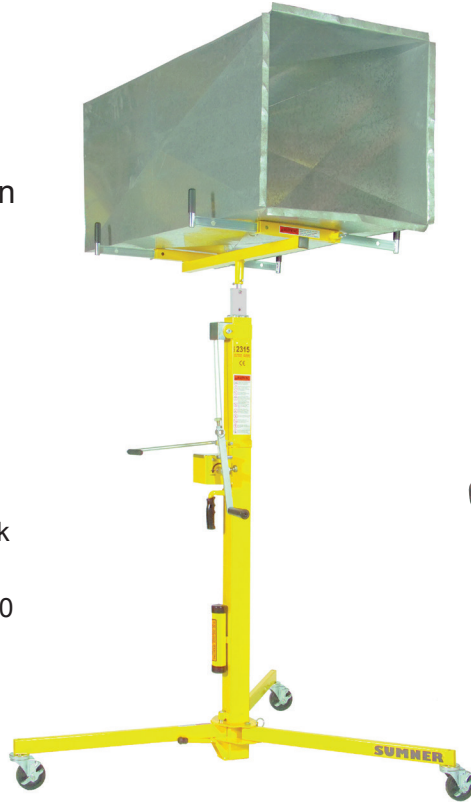

Drywall lift truck available!
Part No. 784510

Cradle tilts up to 45° for cathedral ceilings.

Loads at a convenient 34" (86 cm).



2300 Features

Self-braking winch with two speed winch handle. No spinning wheels, no free fall, no pinched fingers!



Lo Speed





Hi Speed



Stored Position


Fold-up steering lever allows operator to stand back and guide load to exact location

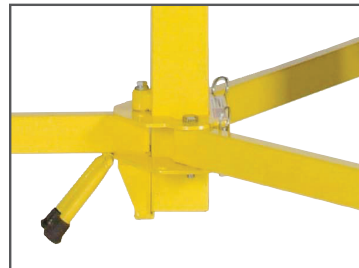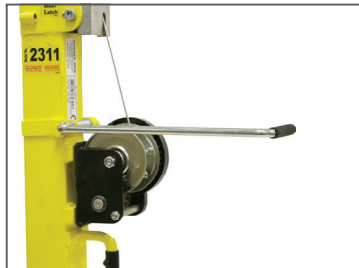

Back stop brake prevents lift from backing up while unloading drywall panels

Series 2300 Features

Cradle arm can be set to multiple positions (up to 65 degrees) using plunger pins, or cradle can float freely.

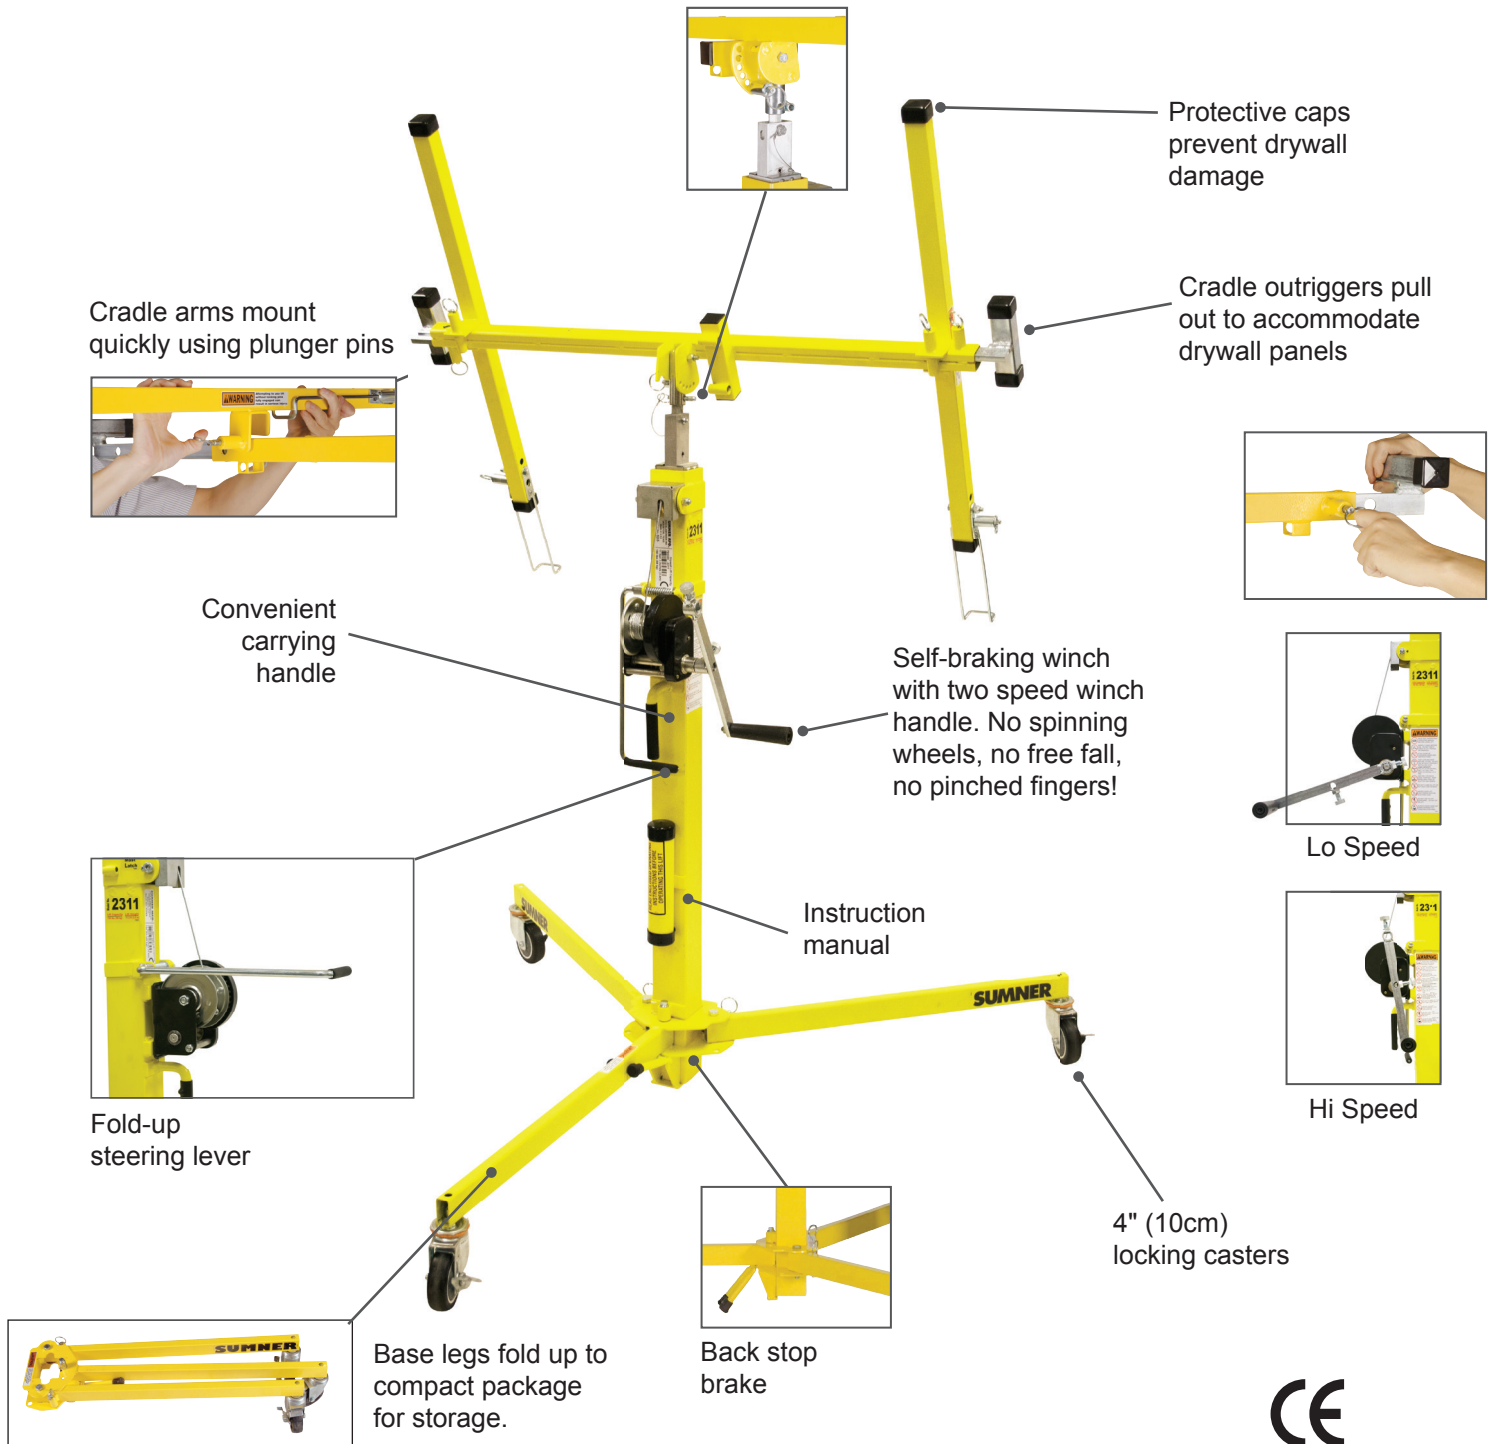

Part #	Description	Load Height (maximum)		Load Height (minimum)		Load Capacity		Max. Drywall Dimensions		Base Height		Base Footprint (open)		Lift Weight	
		Feet	Meter	Inch	cm	Lb	Kg	Feet	Meter	Inch	cm	Inches	M-eters	lbs	kg
784345	2311 Drywall Lift	11' 2-3/4"	3.4	34"	86	150	70	4 x 12	1.2 x 3.7	7"	18	55 x 55 x 52	1.4 x 1.4 x 1.3	109	49.4
784346	2315 Drywall Lift	14' 9-3/4"	4.5	48"	122									N/A	115
784332	2315 HVAC Lift							87	39.5						

For more information visit sumner.com

© 2017 Sumner Manufacturing, Co., LLC. 2300Lift_Brochure. *Trademark of Sumner Manufacturing Company, LLC.

SUMNER*

A Southwire Company