

What's in the Box?

PART NO.	QTY	DESCRIPTION
V2V-AV2H	1	SVideo, Composite Video and Audio to HDMI Converter
PS5VDC2A	1	5 Volt 2 Amp Power Supply

Technical Specifications

AUDIO	
Signal Type	Stereo Unbalanced
Input Interface	3.5 mm Jack Socket (Female)
VGA VIDEO	
Format	VGA RGB Analog (75Ω, 0.7Vp-p)
Resolution	Up to 1600x1200 @ 85Hz/2048x1536 @ 60Hz
Input Interface	HD-15 Female
H Frequency Range	30-95KHz
V Frequency Range	50-180Hz
HDMI VIDEO	
Format	HDMI 1.3b [Deep Color, xvYcc color space supported]
DVI Compliance	Single-link DVI-D 1.1
HDCP Compliance	1.0/1.1
Video Bandwidth	Single-link 340MHz [10.2Gbps]
Resolution	480i,480p,720i,720p,1080i,1080p
Output Interface	(1) HDMI[7.1ch audio & video]
Connector	Type A[19-pin female]
Maximum Distance	25 ft.
OTHER	
Power	External 100-240 VAC/5VDC2A @10W
Dimensions	
Weight	0.71 lb
Operating Temp.	0-55 °C (32-131°F)
Storage Temp.	-20-85 °C (-4-185 °F)
Humidity	Up to 95%

© Copyright 2011 Smart-AVI, All Rights Reserved

NOTICE

The information contained in this document is subject to change without notice. Smart-AVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for any particular purpose.

Smart-AVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced or translated into another language without prior written consent from Smart-AVI.

For more information, visit www.smartavi.com.

Rack Mountable Option



Our SmartRack is the perfect solution to allow virtually all SmartAVI devices to be custom mounted in a standard 19" server rack. The SmartRack is fully adjustable and can secure/organize several devices.

Smart-AVI
SMART AUDIO VIDEO INNOVATION

Installation Manual

CVH-01



VGA and Audio to HDMI Converter



Smart-AVI
SMART AUDIO VIDEO INNOVATION

SmartAVI, Inc. / Twitter: smartavi
11651 Vanowen St. North Hollywood, CA 91605
Tel: (818) 503-6200 Fax: (818) 503-6208
<http://www.SmartAVI.com>

www.smartavi.com

Introduction

The CVH-01 converts Analog VGA Video and Stereo Audio to HDMI


Features

- Connects old systems to newer HDMI displays
- Converts analog video signals to digital HDMI signals
- Can be used as VGA to DVI converter
- Highly precise 10-bit A/D conversion of each color channel
- Ensures to send high-definition signal without signal loss
- Supports Plug-and-play function, no software installation required
- Supports signal high-definition display for multiple sources, such as DVD players
- Satellite receivers, digital projectors, A/V receivers, and set up boxes
- Cost-effective solution (no need to buy HDTV sources)

Applications

- Home Theater
- PC Networking
- Conference Center Systems
- Point of Sale
- Camera Surveillance
- Video Phone
- Control Room Systems
- Recording Studios

Product - Installation Diagram

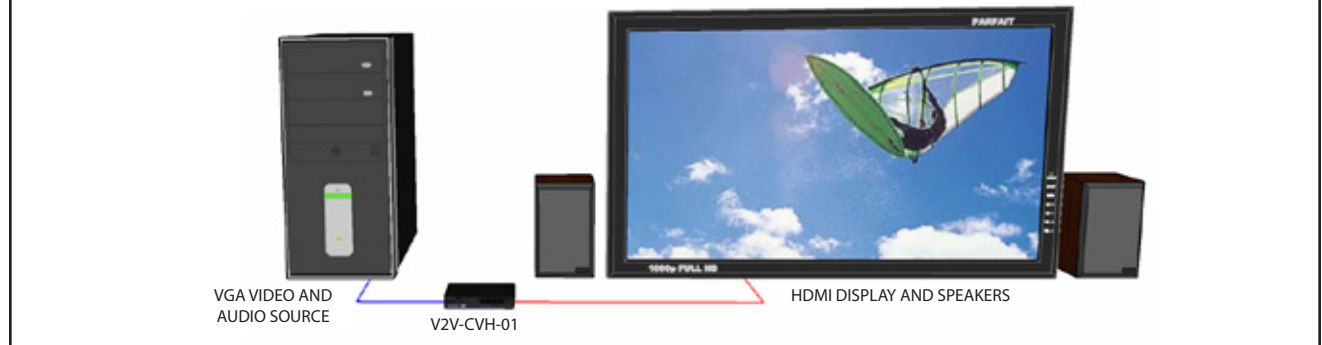

Installation

1. Connect a VGA video and audio input device.
2. Connect an HDMI display to the HDMI output on the CVH-01.
3. Connect the power cord to the CVH-01.
4. Power on the input device and the display.