

4-Port Video WUXGA Splitter


Send One VGA Signal to Four Displays

The VS4P is a 4-port video WUXGA splitter that allows a computer to display VGA video on four monitors simultaneously.

- Split WUXGA signal into four ouputs
- Resolutions up to 1600x1200 @ 85Hz and up to 2048x1536 @ 60Hz
- Easy installation
- 300 MHz Bandwidth
- Compact metal enclosure



SPECIFICATIONS

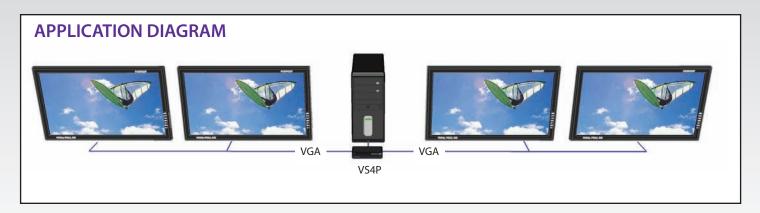

VIDEO		
Format	VGA RGB Analog (75Ω, 0.7Vp-p)	
Resolution	Up to 1600x1200 @ 85Hz 2048x1536 @ 60Hz	
Input Interface	(4) HD-15 Female	
Output Interface	(1) HD-15 Male	
H Frequency Range	30-95KHz	
V Frequency Range	50-180Hz	
OTHER		
DDC Signal	5 Volts [peak-to-peak], TTL	
TDMS Signal	1.2 Volts[peak-to-peak], TTL	
Power	External 5VDC2A @ 10W	
Dimensions	7.75"W x 1.625"H x 3.375"D	
Weight	0.5 lbs.	
Approvals	Device: CE, ROHS Power Supply: C-UL US, CE	
ORDERING INFORMATION		
Part No. Desci	Description	
VS4PS WUXGA	WUXGA 4-Port Splitter. Includes: [VS4P and PS5VDC2A]	



Many leading companies have recognized and embraced the innovation of SmartAVI's technologies and have successfully incorporated them into their organizations. Clients of SmartAVI include:



SmartAVI, Inc. / Twitter: smartavi - 11651 Vanowen St. North Hollywood, CA 91605 Tel: (818) 503-6200 Fax: (818) 503-6208 - http://www.SmartAVI.com



