

Premium flexible barrier hose with standard fittings



# Soft Magic® Barrier Hose

Rated for R-410A, CFC, HCFC  
and HFC refrigerants


**FOR U.S. JOBS**  
UNIWELD EMPLOYS OVER 300 WORKERS

**RATED FOR  
R410A  
\*2 YEAR  
WARRANTY**



Maximum Working Pressure: 800 PSI  
Burst Pressure: 4000 PSI

Standard Fitting  
(actual size)

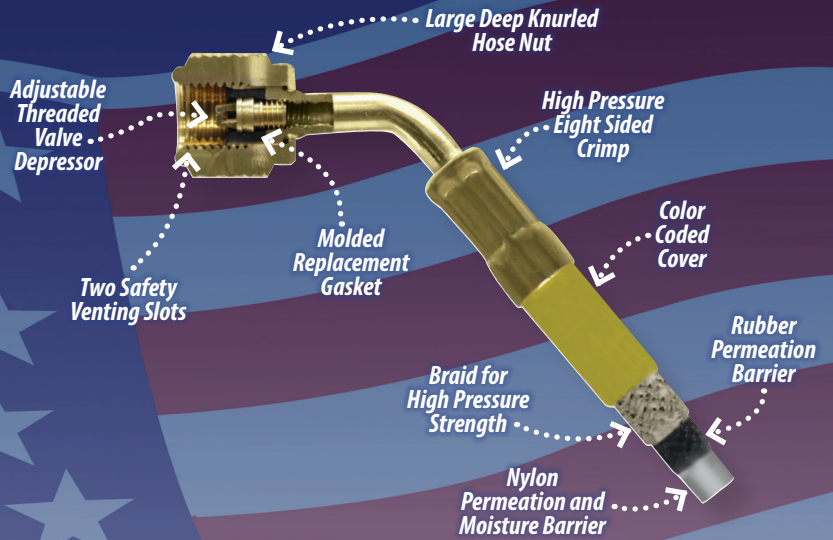

**5 HVAC/R TOOLS**

	Length		Red	Yellow	Blue	Hose Set 1 Each R, Y, B Part#
			Part#	Part#	Part#	
Soft Magic® Barrier Hoses with Standard Fittings	6"	15cm	H06SMBR	H06SMBY	H06SMBB	HC353SMB Hose Set: [2] 3 ft. hoses and [1] 5 ft. Hose
	12"	30cm	H1SMBR	H1SMBY	H1SMBB	
	24"	60cm	H2SMBR	H2SMBY	H2SMBB	
	36"	90cm	H3SMBR	H3SMBY	H3SMBB	HC3SMB
	48"	120cm	H4SMBR	H4SMBY	H4SMBB	HC4SMB
	60"	150cm	H5SMBR	H5SMBY	H5SMBB	HC5SMB
	72"	180cm	H6SMBR	H6SMBY	H6SMBB	HC6SMB
	96"	240cm	H8SMBR	H8SMBY	H8SMBB	HDC5MB Hose Set: [3] 5 ft. 1/4" Hoses and [1] 5 ft. 3/8" Hose
	25'	7.50m	H25SMBR	H25SMBY	H25SMBB	
	50'	15.00m	H50SMBR	H50SMBY	H50SMBB	
100'	30.00m	H100SMBR	H100SMBY	H100SMBB		

Part#	Description
H1476	Pkg. of (6) Gaskets and (3) Depressors
HX14N-10	Pkg. of (10) Gaskets
HX14N-100	Pkg. of (100) Gaskets
H76S-10	Pkg. of (10) Valve Depressors

See HVAC/R Price List for details.



92655  
Soft Magic®  
Barrier Hose  
Display Rack  
(Holds up to  
50 Hoses)

**60**



Uniweld Products, Inc. Fort Lauderdale, FL 33312 U.S.A. Customer Service: 800.323.2111  
info@uniweld.com • www.uniweld.com