



Technical Specifications

55462

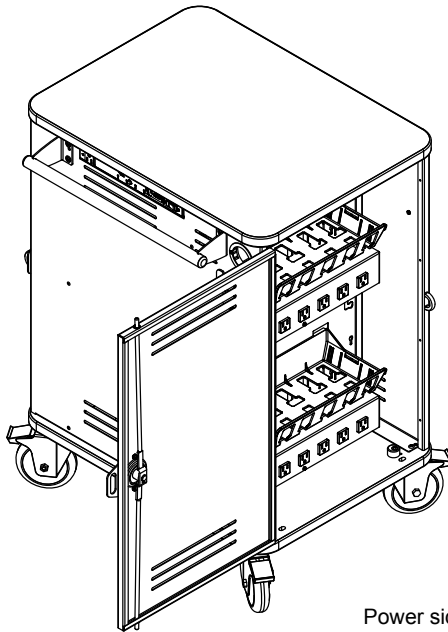

Power side

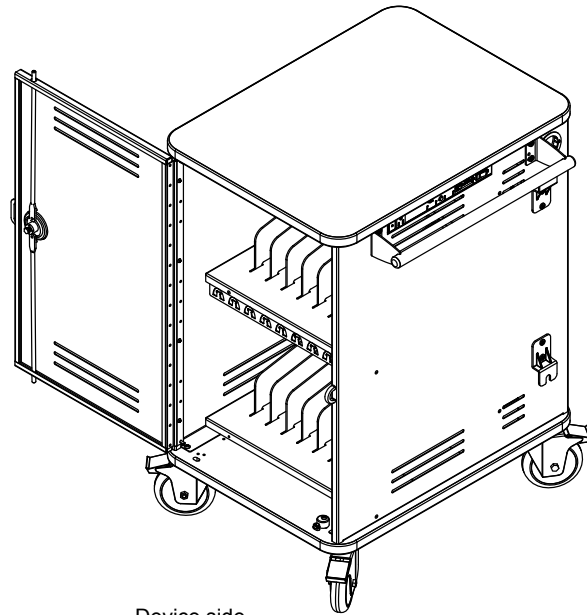

Device side

Use the Pro20 Cart to store, transport, and charge up to 20 notebooks or laptops. An optional current-sensing charger provides adaptive switching. Padded shelves and flexible dividers protect the notebooks. The overhead wire management aids the wiring integration and allows the charging plugs to hang in front of each laptop. The cart's compact footprint and handle provide easy mobility. The Pro20 Cart is made with heavy-gauge steel for security and powder-coated for a durable, long-lasting finish. A dual-bolt lock with hasp on the doors increase security of the notebooks.



Intertek

Features and Benefits

- Stores, charges, and transports up to 20 of the largest notebooks (laptops) commonly used in education
- 1.688"W x 17.450"D x 12.438"H storage bay
- Small cart footprint (21"W x 28"D) saves valuable space
- Durable ABS plastic dividers and shelf padding protect notebooks from scratching (dividers are removable to provide storage space for thicker devices)
- Doors provide easy-access to device and power-side of cart (can be flipped to be hinged from the left or right)
- Double bolt keyed locks and heavy-gauge steel doors provide security
- Hasp locks provide an additional level of security and the ability to use your padlocks of choice (not included), or secure the unit to a wall
- Notebooks and students are separated from all line voltage
- Superior, all-metal overhead cord management system keeps charge cords organized above each storage bay
- Ventilated doors and side panels keep notebooks and chargers cool, preventing overheating, and extending device life
- Replaceable, IEC quick-release 8' nominal 14 AWG, 3-wire power cord and external cord wrap brackets provide easy power access
- Four inboard locking casters provide easy rolling, and quiet transport (5" balloon wheel, 4" balloon wheel options available)
- One all steel handle provides control and maneuverability
- Worksurface and base panel 3mm vinyl edging protects walls and furniture
- Cart ships fully-assembled with handle for quick, simple integration and deployment
- Durable powder coated steel chassis provides a long-lasting finish
- Scratch and impact-resistant high-pressure laminate top provides a durable, useful worksurface for instructors
- ETL recognized (certified to UL 60950-1) in the US and Canada for the cart and electrical system
- Warranted to be free of all defects in materials and workmanship for 10 years, electrical system 2 years
- Designed and assembled in Chippewa Falls, WI, USA

Available with:

- PowerProdigy™ charger that senses current from both power units and distributes power (up to 10A) to the least-charged devices first (where charging is needed most) ***For most power adapters up to 65W**
- Power switch provides continuous power to both power units (non current-sensing) ***For most power adapters up to 65W**
- Basic Timer provides cycling power to both power units (non current-sensing) ***For most power adapters up to 65W**
- Two 14-outlet, (125V~/12A, 60Hz) universal power units work with both inline, and wall adapters
- External power switch provides easy-access for safe power connection / disconnection
- Two auxiliary outlets (always on) for teacher laptop, WiFi access point, or other accessory (1 external, 1 internal)
- Large, removable QuickBrick™ wiring trays with retaining straps for charge adapters allow wiring to be completed outside the cart at the comfort of a workstation or desk to provide quick and easy integration

This cart is designed to hold up to 20 notebooks or laptops.

55468-AAD - with 4" Balloon Wheels, PowerProdigy™ charger
55468-ABD - with 5" Balloon Wheels, PowerProdigy™ charger
55462-AAB - with 4" Balloon Wheels, Power Switch
55462-ABB - with 5" Balloon Wheels, Power Switch
55462-AAL - with 4" Balloon Wheels, Basic Timer
55462-ABL - with 5" Balloon Wheels, Basic Timer

Color Options

Laminate:
White Fiesta



Metal:
Warm Gray



Construction

- The worksurface and base panel is constructed from 1" NAF (No Added Formaldehyde) composite board with .030" high-pressure laminate on one face, and a balancing phenolic backer on the opposing face
- Worksurface and base panel edges are covered with 3mm vinyl edgeband
- 16-gauge side panels, shelves, and doors
- All metal components are finished with a scratch-resistant powder coat epoxy
- This cart is factory-assembled, packaged, and shipped on its own skid

Specifications

Capacity	20 Notebooks or Laptops	
Storage bays (nominal)	1.688"W [4.29 cm] x 17.450"D [44.32 cm] x 12.438"H [31.59 cm]	
Electrical	• (2) 14-outlet power units (outlets rotated 90°) • 125V~/12A, 60Hz • 15-amp breaker • IEC quick-release (replaceable) 8' nominal [244 cm], 14 AWG, 3-wire power cord	• Locking power-side door isolates and separates electrical line voltage from students • ETL recognized (certified to 60950-1)
Charging options	(See p.4 for specs)	
Wheels	5" Balloon Wheels - Weight capacity 300 lb [136 kg] each 4" Balloon Wheels (total locking) - Weight capacity 250 lb [114 kg] each	
Certifications / Compliance	• ETL recognized • SCS Indoor Advantage Certified	• Meets or exceeds applicable ANSI-BIFMA test standards
Unit weight (nominal)	146 lb [66.3 kg]	
Shipping weight (nominal)	178 lb [80.8 kg]	


Specifications subject to change without notice

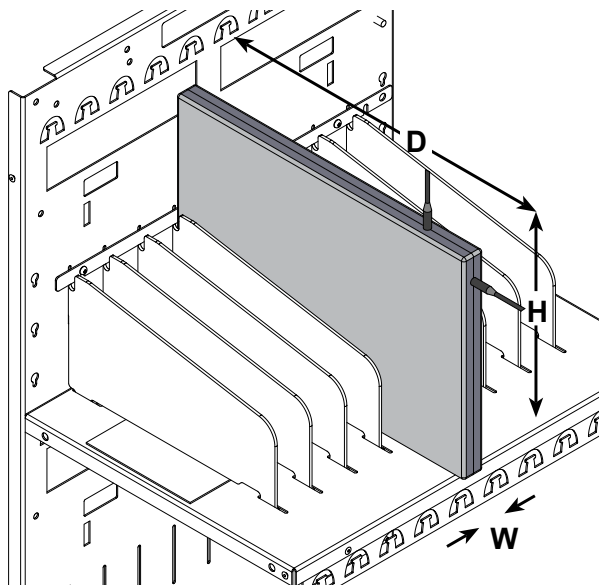


Double-bolt lock with padlock hasp (on both doors)
(padlocks not included)

Devices must be placed in the bays with the charge plug on one of the two exposed edges shown.

ORDER CODE A = 4" Balloon Wheel

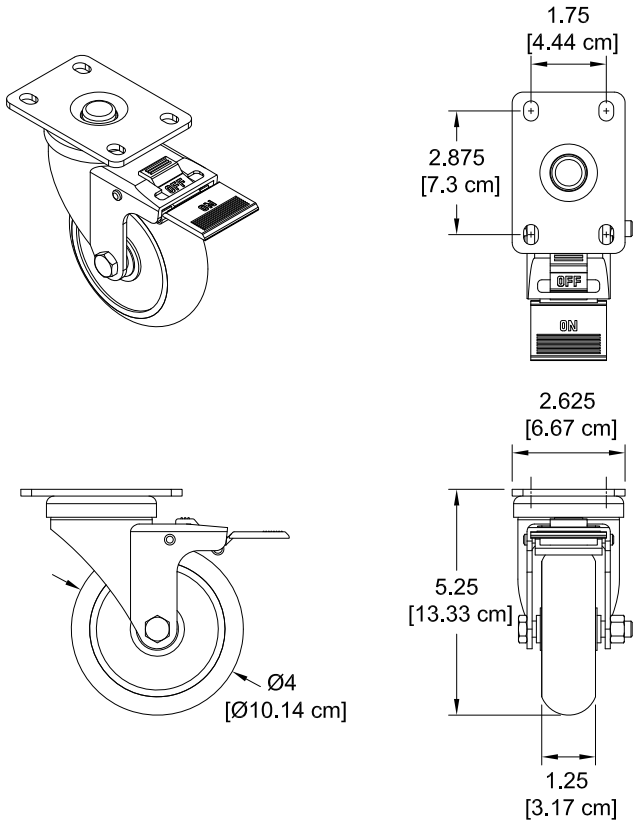

ORDER CODE B = 5" Balloon Wheel

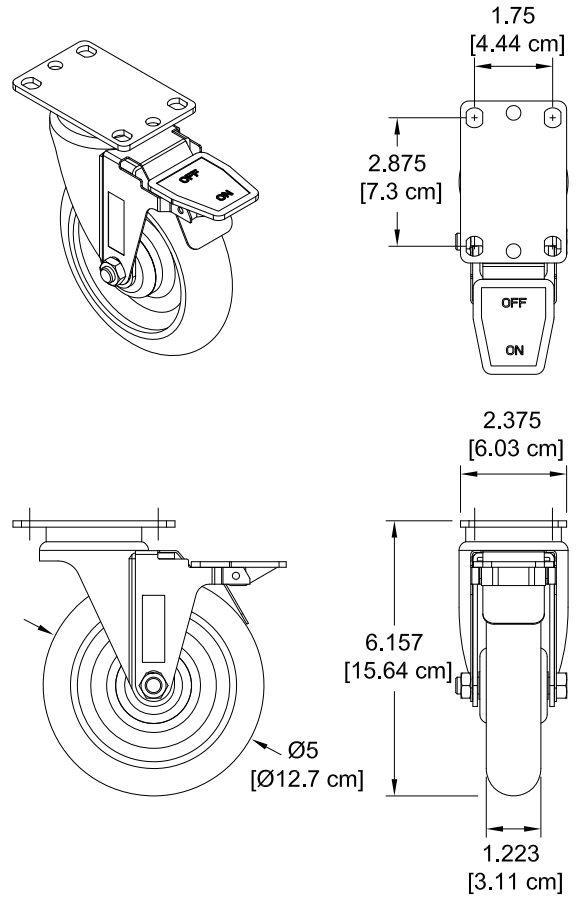


PowerProdigy™ Charger (D)

Use with higher amp-draw devices. On a fully-loaded Pro20, the PowerProdigy™ Charger can be used with **most power adapters up to 65W.**

- Smart charging senses current and distributes power to the power units requiring it most
- Four green LED lights indicate charging activity status of each power unit
- Four timed power unit-dedicated outlets (labeled A, B, C, D) controlled by logic board
- Two auxiliary outlets (1 external, 1 internal)
- ETL recognized (certified to 60950-1)


Input:	125V~/12A, 60Hz
Breaker:	15A, 250 VAC
Cycling interval:	15 minutes
Cycling outlets:	4 timed (A, B, C, D) up to 10A
Auxiliary outlets:	1A each (controlled by main power switch)
Power Cord:	IEC quick-release (replaceable) 8' nominal, 14 AWG, 3-wire
Power switch:	15A (externally accessible)

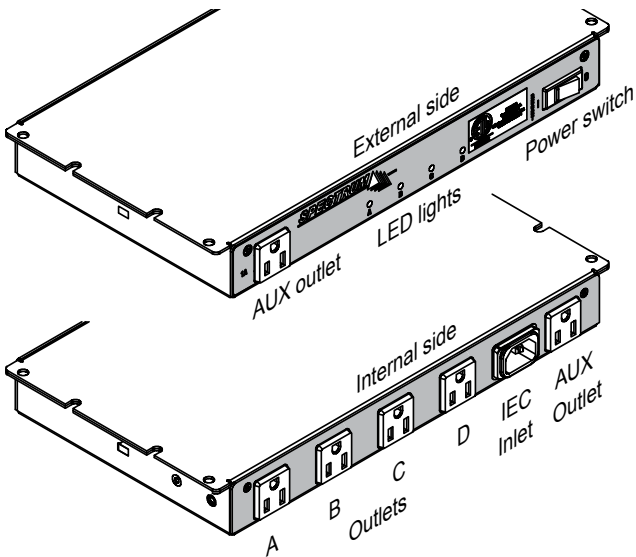**Power Switch (B)**

The Power Switch provides continuous power to all power units. Use with lower amp-draw devices. On a fully-loaded Pro20, the Power Switch can be used with **most power adapters up to 65W.**

- Four continuous power-unit dedicated outlets (labeled A, B, C, D)
- Two auxiliary outlets (1 external, 1 internal)
- ETL recognized (certified to 60950-1)


Input:	125V~/12A, 60Hz
Breaker:	15A, 250 VAC
Outlets:	4 timed (A, B, C, D) up to 10A
Auxiliary outlets:	1A each (controlled by main power switch)
Power Cord:	IEC quick-release (replaceable) 8' nominal, 14 AWG, 3-wire
Power switch:	15A (externally accessible)

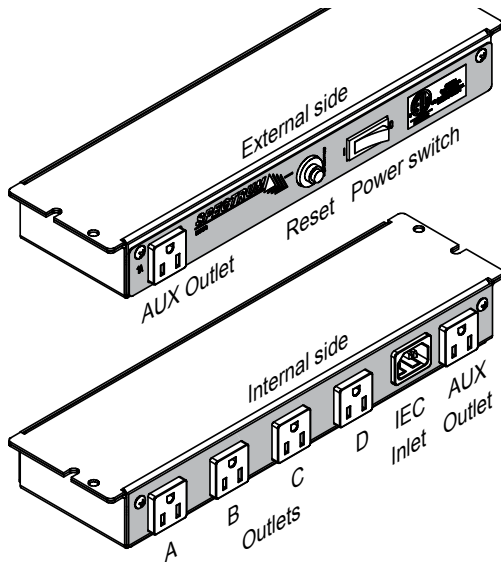**Basic Timer (L)**

The Basic Timer charges one half of the devices for 15 minutes, then charges the second half of the devices for another 15 minutes. This cycling occurs automatically and is not adjustable. On a fully-loaded Pro20, the Basic Timer can be used with **most power adapters up to 65W.**





- Two timed power-unit dedicated outlets (labeled A, B) (up to 10A power output)
- Two green LED lights indicate charging activity status
- One auxiliary outlet (external)
- ETL recognized (certified to 60950-1)

Input:	125V~/12A, 60Hz
Breaker:	15A, 250 VAC
Cycling interval:	15 minutes
Cycling outlets:	4 timed (A, B) up to 10A
Auxiliary outlet:	1A (controlled by main power switch)
Power Cord:	IEC quick-release (replaceable) 8' nominal, 14 AWG, 3-wire
Power switch:	15A (externally accessible)

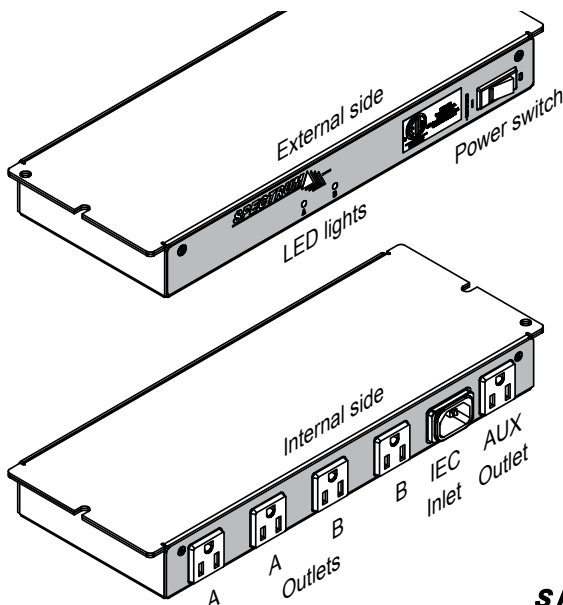


External power switch,
LED indicators, and
AUX outlet


Pro20 Notebook Cart
(Shown with 5" balloon wheels)

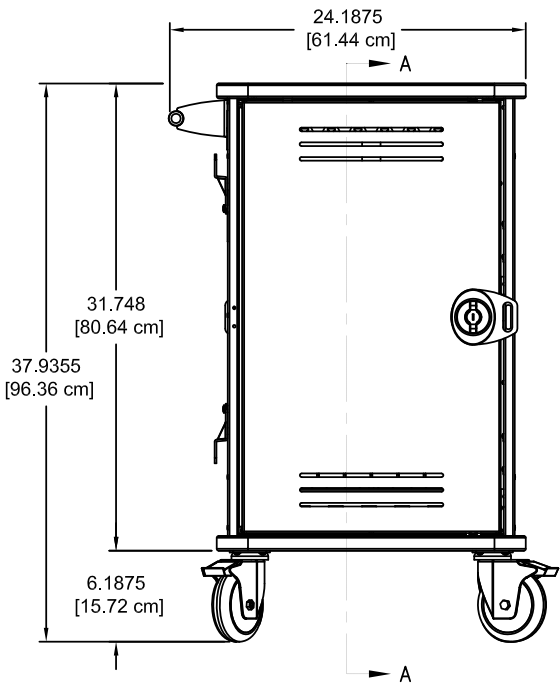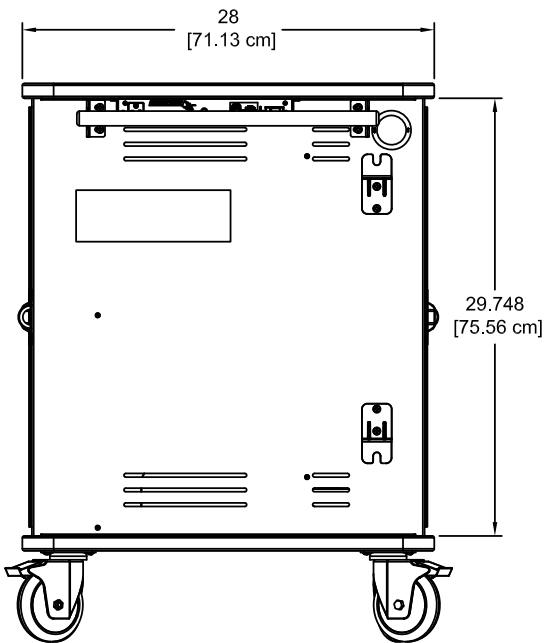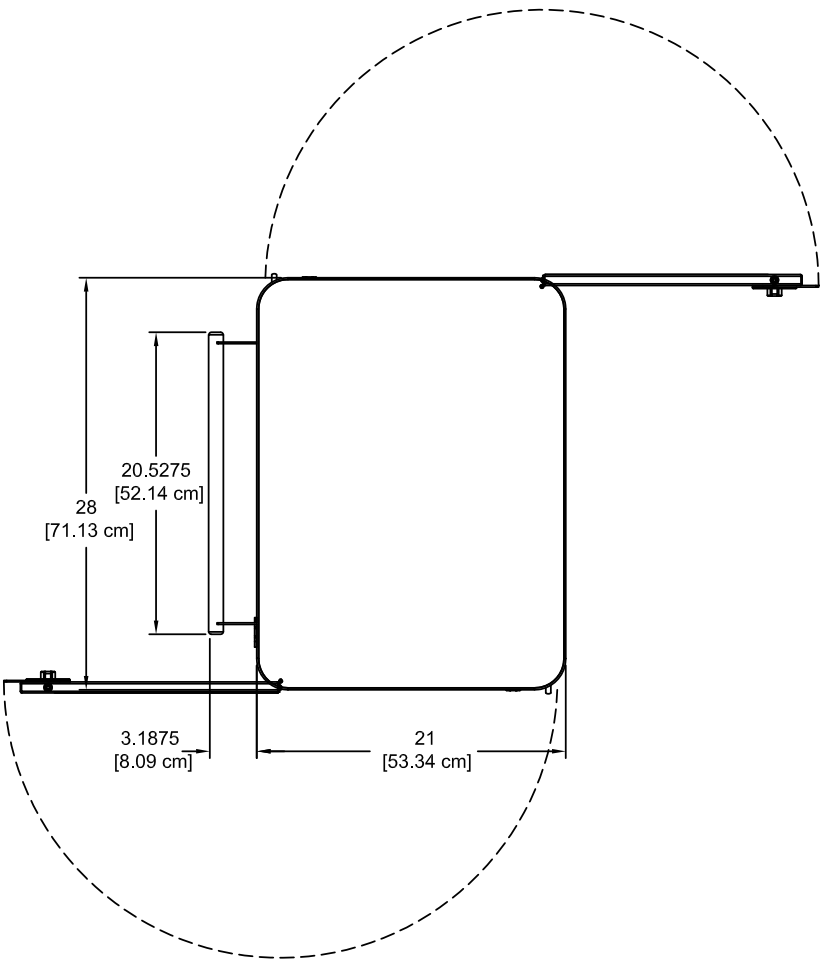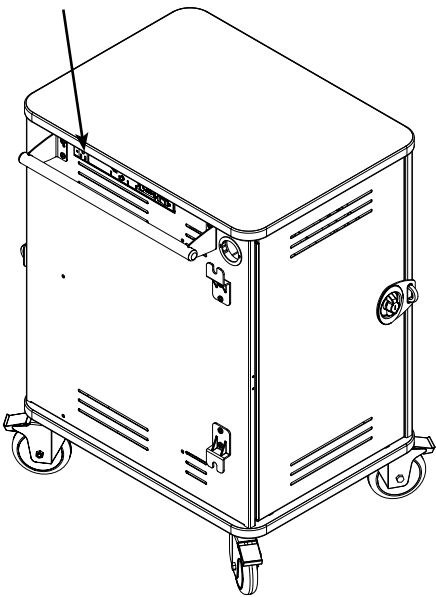


Section view A-A

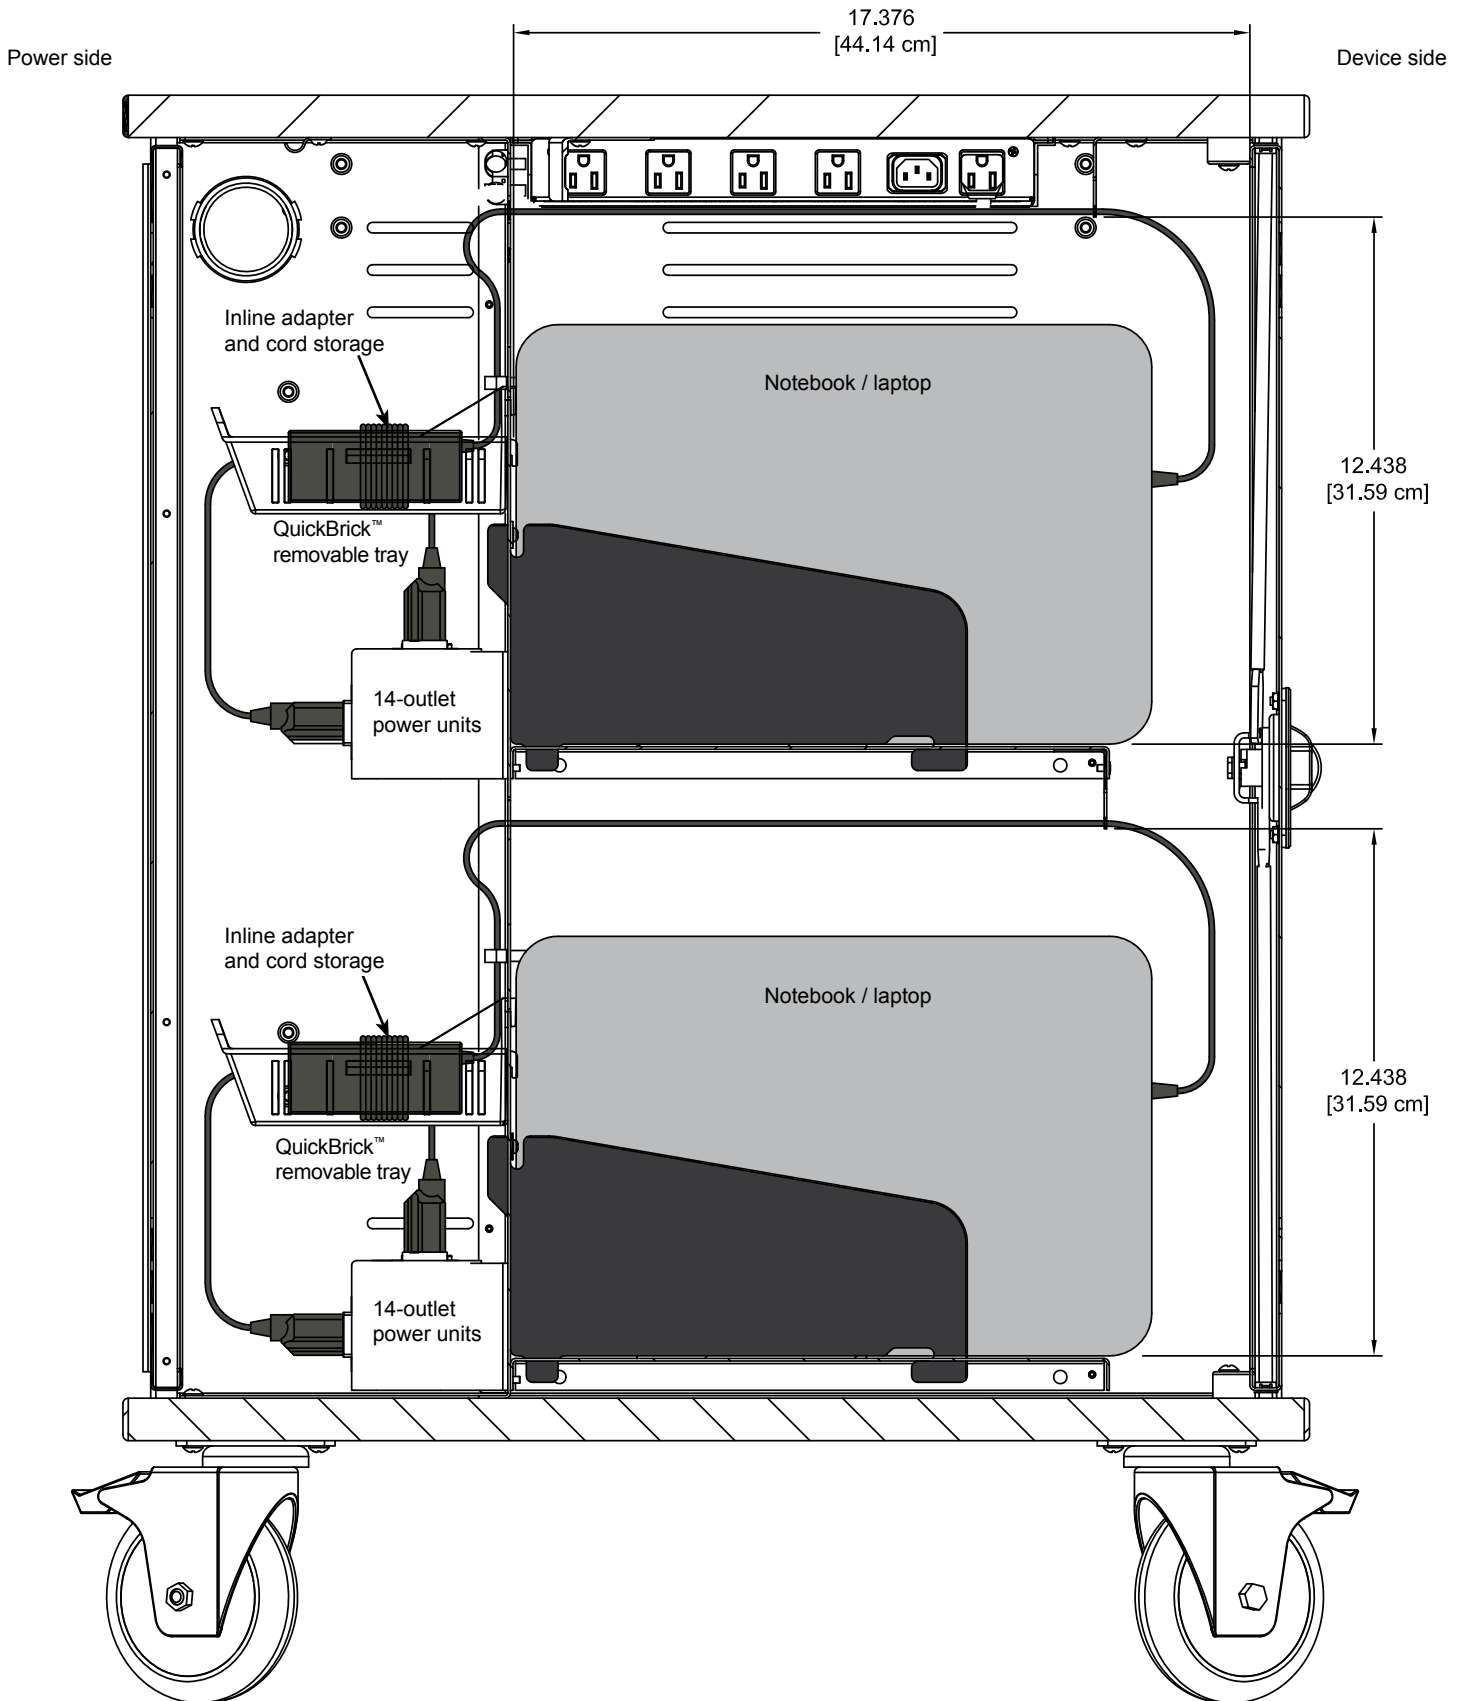


Device side view
(shown without door)

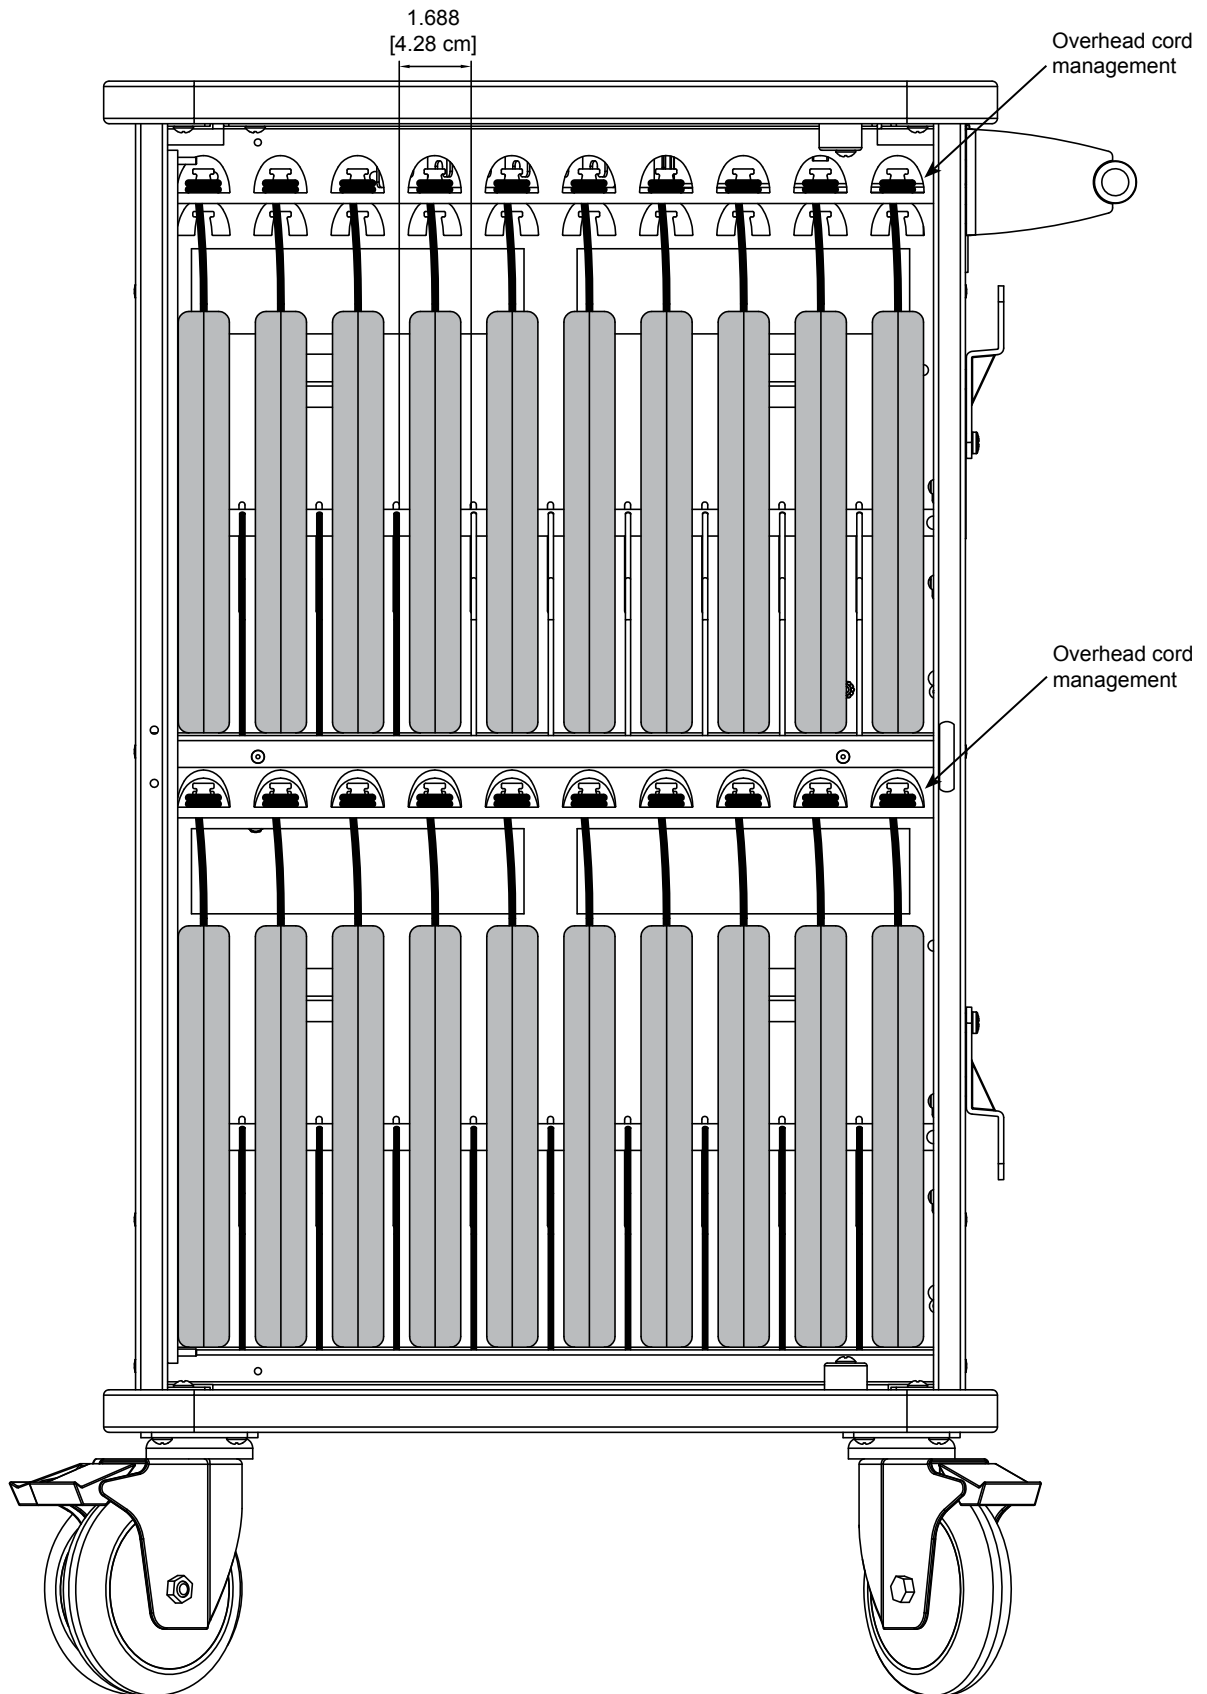


Power-side wiring diagram
(shown without door)

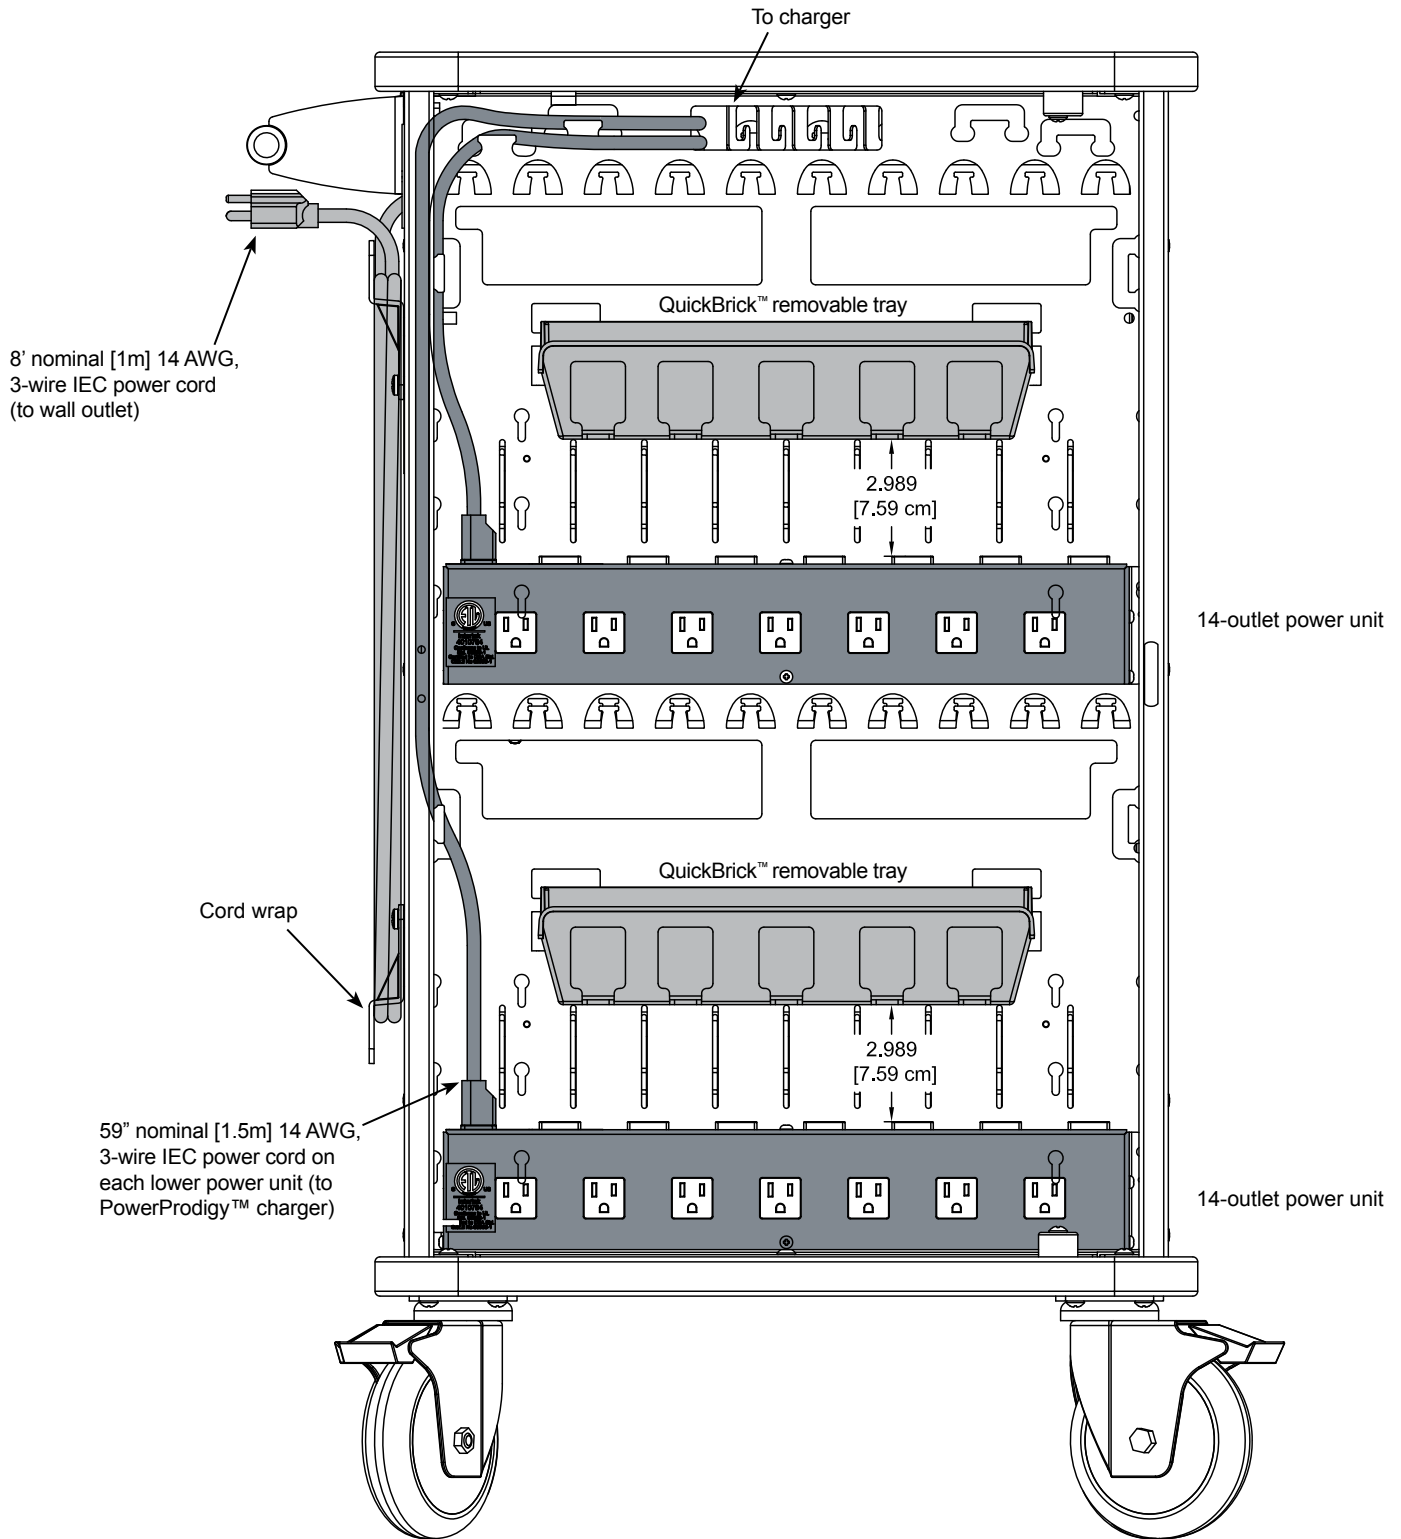

Note: Cart includes two QuickBrick™ removable trays with a hook and loop retaining strap for charge adapters for fast and easy wiring for quick deployment and cord storage.

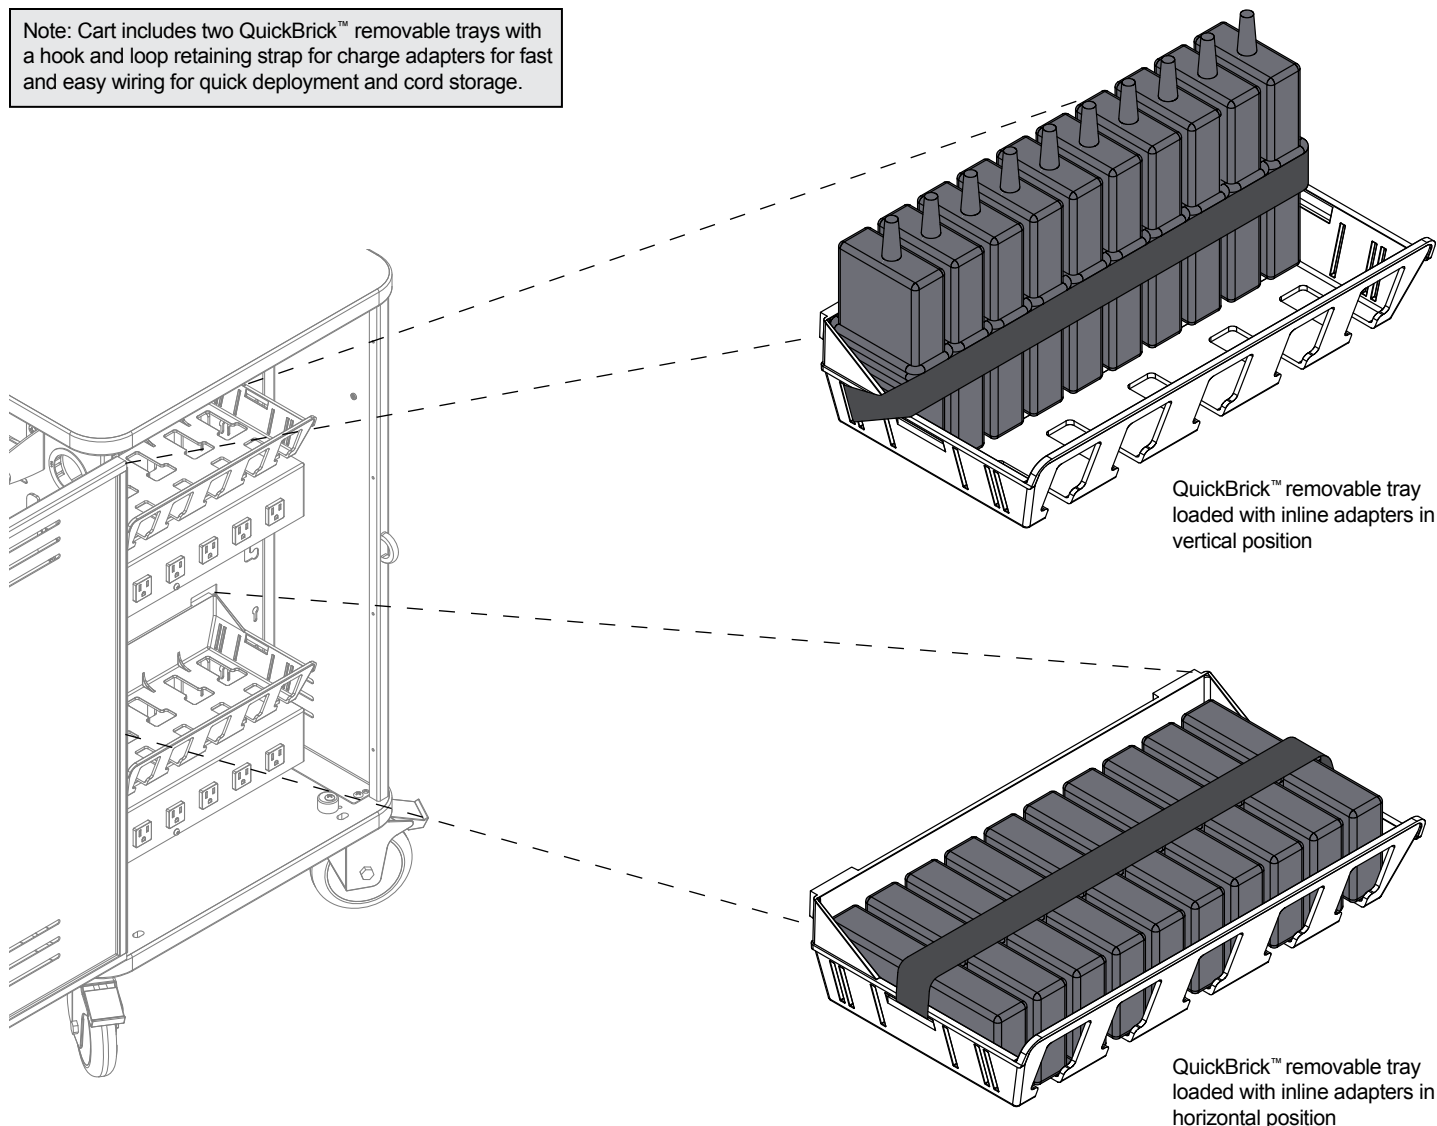

Accessories



Slot labels for Pro20 - 55478

- Black numbers on transparent adhesive backer
- 1-10 label, 11-20 label



Hook-and-loop Strap Kit - 95004

(16) .75" [1.91 cm] x 12" [30.48 cm],
and (32) .75" [1.91 cm] x 5" [12.7 cm]

Warranty

WE WILL MAKE IT RIGHT FOR YOU!

Spectrum is committed to provide complete customer satisfaction. Each of our products is manufactured from the best materials available and each product is stringently monitored throughout the production process through our P.A.C.E. program (Product Assurance to meet Customer Expectations).

We expressly warrant that Spectrum products will be of good quality and workmanship and free from defect for the period set out in the warranty table below from the date of delivery. This warranty shall not apply to defects or damage resulting from misuse, abuse, neglect, improper care, modification or repair not authorized by Spectrum, or any other cause outside the control of Spectrum. Spectrum will, at its sole option, either repair or replace the defective product.

This warranty is exclusive; no other warranty, written or oral, is expressed or implied. This warranty is given by Spectrum to Buyer and to no other person or legal entity. No Spectrum dealer, distributor, agent or employee is authorized to make any modification or addition to this warranty.

NOTWITHSTANDING ANYTHING TO THE CONTRARY, SPECTRUM WILL NOT UNDER ANY CIRCUMSTANCES BE LIABLE FOR INDIRECT OR LIQUIDATED DAMAGES, INCLUDING CONSEQUENTIAL, INCIDENTAL AND SPECIAL DAMAGES. IN NO EVENT SHALL SPECTRUM'S LIABILITY, WHETHER UNDER CONTRACT OR WARRANTY, IN TORT OR OTHERWISE, EXCEED THE PURCHASE PRICE RECEIVED BY SPECTRUM FOR THE PRODUCT AT ISSUE AND "RECALL ACTION" EXPENSES. SPECTRUM SHALL NOT BE SUBJECT TO ANY OTHER OBLIGATIONS OR LIABILITIES, WHETHER ARISING OUT OF BREACH OF CONTRACT, WARRANTY, TORT (INCLUDING NEGLIGENCE AND STRICT LIABILITY) OR OTHER THEORIES OF LAW, WITH RESPECT TO PRODUCTS SOLD OR SERVICES RENDERED BY SPECTRUM, OR ANY UNDERTAKINGS, ACTS OR OMISSIONS RELATING THERETO.

Our Customer Service Department is ready to provide immediate attention to any questions, comments or concerns. They are available to answer your calls Monday through Friday from 7 am to 5 pm CST. In addition your product comments or concerns are welcome via e-mail at: spectrum@spectrumfurniture.com.

Warranty Table

Item	Warranty Period effective 1/1/2015
Adjustable Crank / Electric Desk Legs	• 1 Year
Flat Panel Desk Gas Cylinders	
Chairs - Adjustable Height Chair Parts – including frames, gas cylinders, wood and plastic parts, control handles, casters - Adjustable Height Chair Upholstery - In-Stock Upholstery - Graded-In Fabrics and Customer Owned Material	• 7 Years • 2 Years • 2 Years • No Warranty
Height Adjustable Columns and Lifts	• 1 Year
General Use Casters	
Electrical (including timers and LINAK actuators)	• 2 Years
Keyboard / Mouse Trays	• 1 Year
Flat Panel Monitor Arms - Flat Panel Monitor Arm – General Parts - Flat Panel Monitor Arm – Gas Cylinders	• 5 Years • 2 Years
Desks and Lecterns - Computer Desk Chassis - Cart Chassis - Lectern Chassis	• 10 Years

