

MICROMETER HEADS

263 AND 1263 MICROMETER HEADS

0-1"/0-25MM

- Reading surfaces satin-finished for easy readability
- No-glare, satin chrome finish on the 263, rust-resistant, stainless steel on the 1263
- Available with reverse reading, if needed
- Ring-type knurled lock nut for quick and sure locking
- Choice of smooth friction thimble for uniform pressure, combination ratchet and speeder for uniform pressure and quicker adjustment, or a plain micrometer head that depends on your own "feel"
- Spindle face available plain or with carbide
- Furnished with 1/2" (12.7mm) or 3/8" (9.5mm) diameter clamping surface

263 and 263M Micrometer Heads

Cat. No.	EDP	Range	Graduation
263P	51251	0-1"	.001"
263P-38	67108		
263P-38TN	67110		
263L	51253		
263XL	51265		
263L-38	67109		
263L-38TN	67111		
263RL	51254	0-1"	.0001"
263FL	51256		
RV263RL	57071		
T263P	51258	0-1"	.0001"
T263L	51260		
T263XL	65054		
T263RL	51261	0-25mm	0.01mm
263MP*	51275		
263ML*	51276		
263MRL*	51257		
263MXL*	65055	0-25mm	0.001mm
V263MRL*	55962		
RV263MRL*	64948		
V263MXRL*	65056		


1263 and 1263M Stainless Steel Micrometer Heads

Cat. No.	EDP	Range	Graduation
1263L	53200	0-1"	.001"
1263RL	53201	0-1"	.0001"
T1263RL	53203	0-1"	.0001"
V1263MRL*	64345	0-25mm	0.001mm


*0-25mm models specify clamping diameter 12 or 12.7mm. 12.7mm sent unless otherwise ordered.




263RL

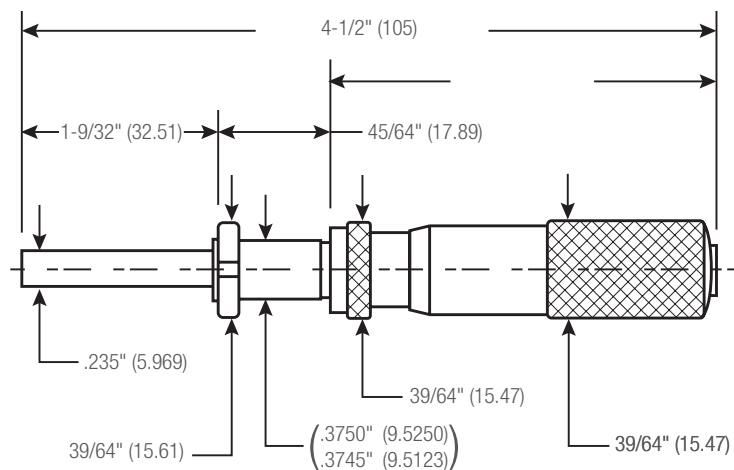

263L-38TN (0-1") dimensions

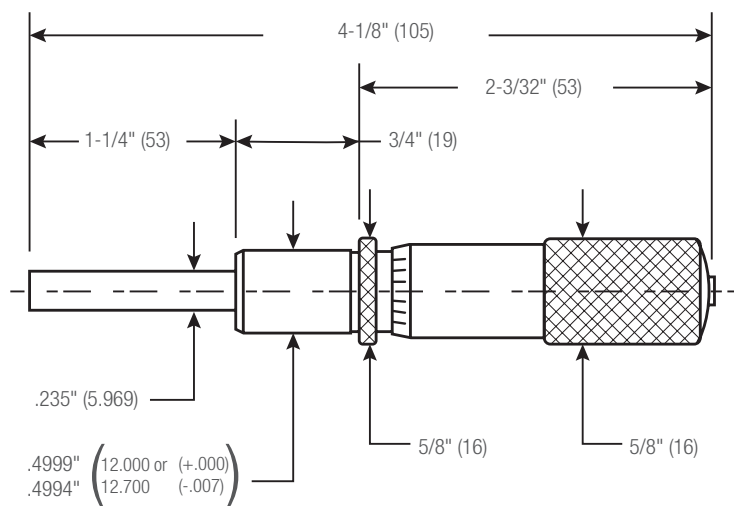

263P (0-1") and 263MP (0-25mm) dimensions

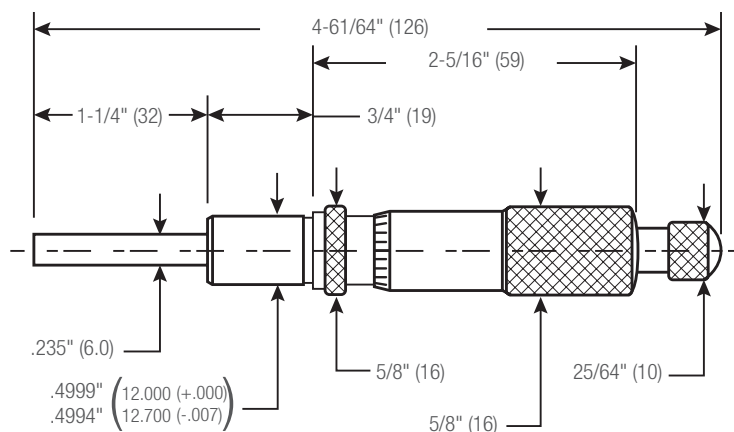

263RL (0-1") and 263MRL (0-25mm) dimensions