

DIAL INDICATORS

253 DIAL INDICATOR SETS

INCH AND MILLIMETER READING

These sets provide in one handy, compact kit three 25 Dial Indicators to handle most gaging jobs at a minimum cost. Sets are ideal for tool and die shops, machine shops and toolrooms having occasional work where a heavy investment in dial indicators would not be practical. The indicators are furnished with jewel bearings.

253 Dial Indicator Sets

Cat. No.	EDP	Description
S253Z	51218	Set of 3 Inch Reading Dial Indicators: 25-111J, 25-131J and 25-441J
S253MZ	56283	Set of 3 Millimeter Reading Dial Indicators: 25-161J, 25-181J and 25-881J

Sets furnished in attractive, protective case.



655 DIAL INDICATORS

AGD GROUP 3

RANGES UP TO 1" AND 25MM

These indicators have a shockless, hardened steel gear train and jewel bearings. They are furnished with a lug-on-center back. Antimagnetic and special non-shock mechanisms are options available for all models. For more information on these and other attachments, accessories and contact points, refer to the end of the AGD Dial Indicator listings. For dial styles, see previous pages.

If lift lever is desired, indicator must be ordered with case stem cap.

655 Dial Indicators

Cat. No.	EDP	Graduation	Range One Rev.	Total	Dial Reading	Stem Dia.
655-161J	53533	0.002mm	0.2mm	0.5mm	0-10-0	.375" (9.5mm)
655-161J-8	64659					
655-261J	53603	0.002mm	0.2mm	0.5mm	0-20	.375" (9.5mm)
655-261J-8	64660					
655-181J	53535	0.01mm	1.0mm	2.5mm	0-50-0	.375" (9.5mm)
655-181J-8	64661					
655-281J	53605	0.01mm	1.0mm	2.5mm	0-100	.375" (9.5mm)
655-281J-8	64868					
655-881J	56229	0.01mm	1.0mm	25mm	0-100	.375" (9.5mm)
655-881J-8	64869					

655 Dial Indicators


Cat. No.	EDP	Graduation	Range One Rev.	Total	Dial Reading
655-118J	53507	.0001"	.008"	.020"	0-4-0
655-111J	53505	.0001"	.010"	.025"	0-5-0
655-211J	53537				0-10
655-511J	53615	.0001"	.010"	.200"	0-5-0
655-611J	53617				0-10
655-124J	53509	.00025"	.010"	.025"	0-5-0
655-224J	53539				0-10
655-128J	53511	.00025"	.020"	.050"	0-10-0
655-228J	53541				0-20
655-129J	53513	.00025"	.030"	.075"	0-15-0
655-229J	53543				0-30
655-134J	53517	.0005"	.020"	.050"	0-10-0
655-234J	53587				0-20
655-136J	53519	.0005"	.030"	.075"	0-15-0
655-236J	53589				0-30
655-138J	53521	.0005"	.040"	.100"	0-20-0
655-238J	53591				0-40
655-131J	53515	.0005"	.050"	.125"	0-25-0
655-231J	53585				0-50
655-142J	53525	.001"	.020"	.050"	0-10-0
655-242J	53595				0-20
655-143J	53527	.001"	.030"	.075"	0-15-0
655-243J	53597				0-30
655-144J	53529	.001"	.040"	.100"	0-20-0
655-244J	53599				0-40
655-145J	53531	.001"	.050"	.125"	0-25-0
655-245J	53601				0-50
655-141J	53523	.001"	.100"	.250"	0-50-0
655-241J	53593				0-100
655-341/5J	53607	.001"	.100"	.500"	0-50-0
655-441/5J	53611				0-100
655-341J	53609	.001"	.100"	1.000"	0-50-0
655-441J	53613				0-100



655-111J



655-161J-8

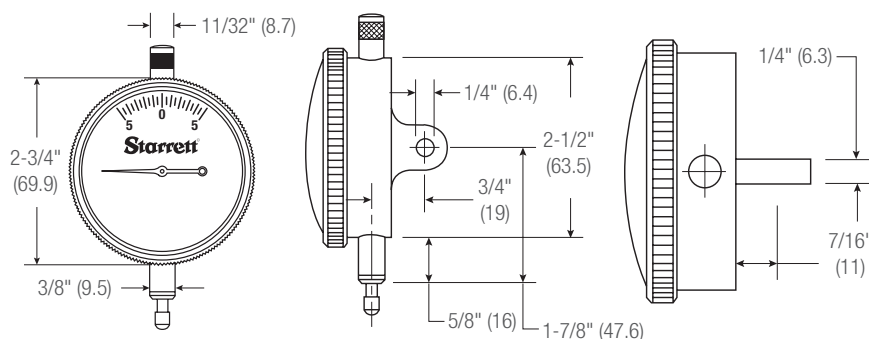

655-131J with top lift

655-341J with stem cap

