

SPECIAL FUNCTION INDICATORS

COUNTERSINK GAGES

687 COUNTERSINK GAGE 82°


688 COUNTERSINK GAGE 90°

689 COUNTERSINK GAGE 100°

Starrett Countersink Gages are offered in three different angles so that the gage sets on the angular side of the countersink, as opposed to a chamfer gage which sets on the top edge of the chamfer.

This gage directly reads the large diameter of the countersink in .002" or 0.05 mm increments. A set master ring is furnished with each gage for calibration and setting. Press the button on top of the indicator to firmly depress the gage head into the countersink. When the gage is removed, the indicator reading is held in place until the reset button is activated.

All ground surfaces are of hardened tool steel. Indicators are AGD design.

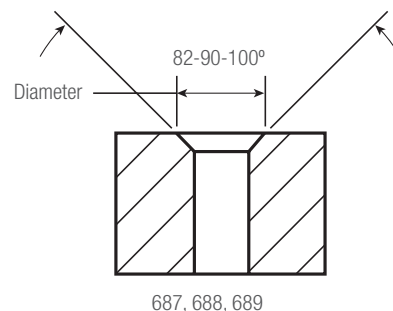

Inch Reading Countersink Gages

82° Angle		90° Angle		100° Angle		Range
Cat. No.	EDP	Cat. No.	EDP	Cat. No.	EDP	
687-1Z	63698	688-1Z	63702	689-1Z	63706	.020-.170"
687-2Z	63699	688-2Z	63703	689-2Z	63707	.160-.360"
687-3Z	63700	688-3Z	63704	689-3Z	63708	.360-.560"
687-4Z	63701	688-4Z	63705	689-4Z	63709	.560-.780"

Millimeter Reading Countersink Gages with Yellow Dials

82° Angle		90° Angle		100° Angle		Range
Cat. No.	EDP	Cat. No.	EDP	Cat. No.	EDP	
687M-1Z	65003	688M-1Z	65007	689M-1Z	65011	0.5-4.3mm
687M-2Z	65004	688M-2Z	65008	689M-2Z	65012	4-9mm
687M-3Z	65005	688M-3Z	65009	689M-3Z	65013	9-14.2mm
687M-4Z	65006	688M-4Z	65010	689M-4Z	65014	14.2-19.8mm

Check Gage Stand for Chamfer, Countersink and Hole Gages

Cat. No.	EDP	Description
695	63875	8-3/16" H x 6" W x 4" D (212 x 150 x 100mm) Hold Downs - 5" (125mm) on Center - 1/4" (6.3mm) Holes


Also available with electronic indicators. Please specify.



687



688

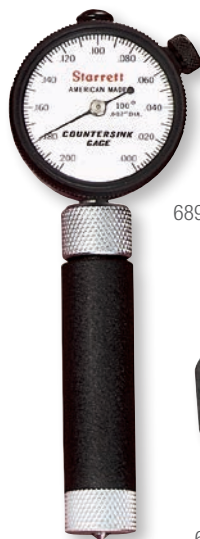

689



687-3Z Countersink Gage with 695 Check Stand with F2720-4IQ Electronic Indicator

