


THREADED ADAPTERS

These threaded adapters are used to mate dissimilar threaded connectors. Included are couplers, male-to-male and male-to-female thread adapters.

COUPLERS

- For mating two male threaded adapters
- Threaded attachment
- Operating Temperatures 32° to 158°F (0° to 70°C)

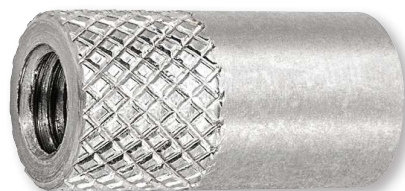

Female to Female Threaded Couplers

Model No.	Dimensions		Thread A	Thread B	Supply
	Length	Thread A			
MLX-25037	0.75 in	#10-32 UNF-2B	1/4-28 UNF-2B	1	1
MLX-25038	0.75 in	#10-32 UNF-2B	M6 x 1-6H	1	1
MLX-25039	1.0 in	5/16-18 UNF-2B	M6 x 1-6H	1	1
MLX-25040	0.75 in	1/4-28 UNF-2B	M6 x 1-6H	1	1
MLX-25041	1.25 in	5/16-18 UNF-2B	M10 x 1.5-6H	1	1
MLX-25042	1.25 in	1/2-20 UNF-2B	M10 x 1.5-6H	1	1
MLX-25064	0.75 in	M6 x 1-6H	M6 x 1-6H	1	1
MLX-25065	1.25 in	M10 x 1.5-6H	M10 x 1.5-6H	1	1
MLX-25066	0.75 in	#10-32 UNF-2B	#10-32 UNF-2B	1	1
MLX-25067	0.75 in	1/4-28 UNF-2B	1/4-28 UNF-2B	1	1
MLX-25068	1.00 in	5/16-18 UNF-2B	5/16-18 UNF-2B	1	1
MLX-25069	1.25 in	1/2-20 UNF-2B	1/2-20 UNF-2B	1	1

FEMALE TO MALE THREAD ADAPTER

- Has one female and one male thread
- Threaded attachment
- Operating Temperatures 32° to 158°F (0° to 70°C)



Female to Male Thread Adapters

Model No.	Dimensions		Female Thread	Male Thread	Supply
	Length	Female Thread			
MLX-25043	0.75 in	#10-32 UNF-2B	M6 x 1-6g	1	1
MLX-25044	0.75 in	M6 x 1-6H	#10-32 UNF-2A	1	1
MLX-25045	0.75 in	1/4-28 UNF-2B	M6 x 1-6g	1	1
MLX-25046	0.75 in	M6 x 1-6H	1/4-28 UNF-2A	1	1
MLX-25047	1.00 in	5/16-18 UNC-2B	M6 x 1-6g	1	1
MLX-25048	0.875 in	M6 x 1-6H	5/16-18 UNC-2A	1	1
MLX-25049	1.125 in	5/16-18 UNC-2B	M10 x 1.5-6g	1	1
MLX-25050	1.25 in	M10 x 1.5-6H	5/16-18 UNC-2A	1	1
MLX-25051	1.25 in	1/2-20 UNF-2B	M10 x 1.5-6g	1	1
MLX-25052	1.25 in	M10 x 1.5-6H	1/2-20 UNF-2A	1	1

SET SCREWS

- For general thread adapters
- Threaded attachment
- Operating Temperatures 32° to 158°F (0° to 70°C)



Set Screws

Model No.	Dimensions		Thread	Supply
	Length	Thread		
MLX-51000195	20mm	M4 x 0.7	1	1
MLX-51000187	25mm	M6 x 1	1	1
MLX-51000188	25mm	M10 x 1.5	1	1
MLX-51000196	25mm	M12 x 1.75	1	1

MALE TO MALE THREAD ADAPTER

- Has two dissimilar male threads
- Threaded attachment
- Operating Temperatures 32° to 158°F (0° to 70°C)



Male to Male Thread Adapter

Model No.	Dimensions		Thread A	Thread B	Supply
	Length	Thread A			
MLX-25053	0.75 in	M4 x 0.7-6g	M6 x 1-6g	1	1
MLX-25054	0.875 in	M10 x 1.5-6g	M6 x 1-6g	1	1
MLX-25055	0.75 in	#10-32 UNF-2A	1/4-28 UNF-2A	1	1
MLX-25056	0.875 in	#10-32 UNF-2A	5/16-18 UNC-2A	1	1
MLX-25057	0.875 in	5/16-18 UNC-2A	1/4-28 UNF-2A	1	1
MLX-25058	0.875 in	1/4-28 UNF-2A	1/2-20 UNF-2A	1	1
MLX-25059	1.00 in	5/16-18 UNC-2A	1/2-20 UNF-2A	1	1
MLX-25060	0.75 in	#10-32 UNF-2A	M6 x 1-6g	1	1
MLX-25061	0.75 in	1/4-28 UNF-2A	M6 x 1-6g	1	1
MLX-25062	1.00 in	5/16-18 UNC-2A	M10 x 1.5-6g	1	1
MLX-25063	1.00 in	1/2-20 UNF-2A	M10 x 1.5-6g	1	1