
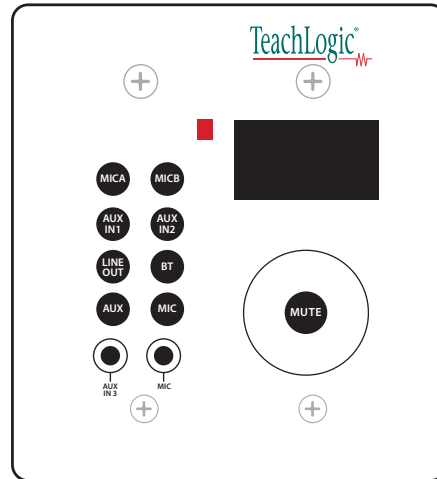


# Amplifier/Receiver

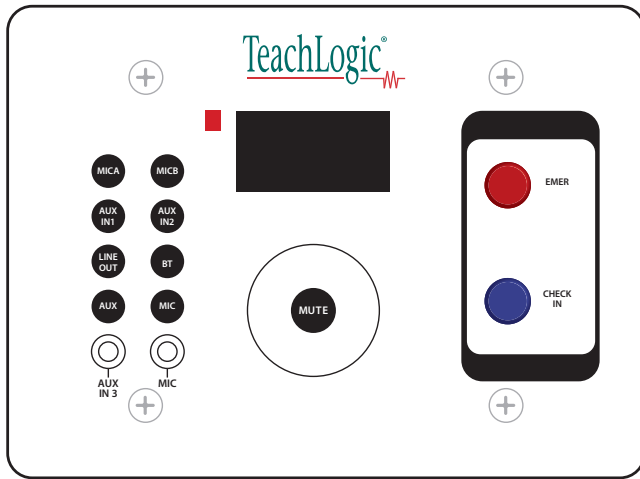

## CPS-120/CPR-125

Wall panel controller for Matrix™ amplifier

### Specifications

	CPR-125	CPS-120
Mic A	Microphone A select	Microphone A select
Mic B	Microphone B select	Microphone B select
Line In 1	Line input 1 select	Line input 1 select
Line In 2	Line input 2 select	Line input 2 select
Line Out	Line output select	Line output select
BT	Bluetooth select	Bluetooth select
Aux In 3	Auxiliary Input 3 select	Auxiliary Input 3 select
Mic	Microphone Input select	Microphone Input select
Mute	Audio Mute button	Audio Mute button
Aux In 3	Auxiliary input jack (3.5mm)	Auxiliary input jack (3.5mm)
Mic	Microphone input jack (3.5mm)	Microphone input jack (3.5mm)
Emer	Emergency alert button	
Check In	Check in button	
Display	LCD display	LCD display
Panel Connector	RJ-45 jack	RJ-45 jack
Cat 5 Connectivity	45 ft between Matrix amplifier and controller	
Dimensions	4.75"W x 6.5"H x 1 7/8"D	4.75"W x 4.75"H x 1.975"D
Weight	9 oz	8 oz

### Features

- Standard surface mount box included

#### CPS-120

- Fits into a standard 2-Gang low voltage trim ring for flush mounting

#### CPR-125

- Fits into a standard 2-Gang low voltage trim ring for flush mounting