



**TLC-1000-U2-10**

**TLC-1000-U3-10**

**USB PTZ Camera for Middle and Small Meeting Room**

# To Make Collaboration Easy and Affordable

TLC-1000-U3-10/TLC-1000-U2-10 is ideal used for video conferencing in the middle and small meeting room. It is equipped with Panasonic's advanced sensor, 10x optical zoom lens, to output crystal clear image with realistic color, even in low light or high contrast of brightness and darkness environment.

It works with any of your favorite conferencing software, totally plug and play, use-friendly.

10x

62.5° FOV

USB3.0  
USB2.0

1080p30



## Compatible With





With Panasonic 5MP sensor, to deliver sharp and high definition image with realistic color; Support WDR, backlight compensation, noise reduction, to adjust image for different working environment




Uses truly 10x optical zoom lens, with 62.5 degree wide angle FOV, to capture details in middle and small room



USB3.0 or USB2.0 video output 1080p30 resolution, plug and play, work with any of your favorite video conferencing software



Matched with IR remote controller, to control PTZ movement, 10 presets and adjust functions as preference in the OSD menu

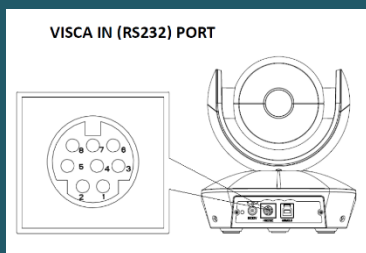

Support RS232 and RS485 control for different control application and other devices connection



Smart, compact and decent mechanism, to bring smooth, silent and accurate PTZ movement, to make sure everyone is participated in the meeting.

Specification		
Mode Number	TLC-1000-U3-10	TLC-1000-U2-10
Camera		
Sensor	1/2.8 inch high quality 5MP HD CMOS sensor,	
Video System	USB3.0: 1920*1080p30/25, 1280*720p60/50/30/25, 1024*768p30,800*600p30,1024*576p30,960*540p30,576*448p30, 768*448p30 USB2.0: 1280*720p25,800*600p30,1024*576p30, 960*540p30,576*448p30,768*448p30, 640*360p30,512*288p30	1920x1080P30, 1280x720P30, 640x480P30
Video Format	YUY2	MJPEG
Lens Zoom	10x optical zoom, 12x digital zoom	
Focal length	f= 4.7(wide)~47mm(Tele)	
View Angle	6.43° (wide) ~ 62.5° (Tele)	
SNR	>50dB	
Noise Reduction	2D/3D	
Minimum LUX	0.1 LUX	
White Balance	Auto/Manual/Indoor/Outdoor/Push/Sodium/Fluorescent	
Focus	Auto / Manual	
Iris	Auto / Manual	
Electronic Shutter	Auto / Manual	
BLC	Supported	
Mechanism		
Pan Rotation Angle	-170° ~ +170°	
Tilt Rotation Angle	-30° ~ +90°	
Pan Rotation Speed	0°~120°/s	
Titl Rotation Speed	0°~80°/s	
Preset	128 presets via RS232, 10 presets via remote controller	
Control	RS232/RS485/USB/Remote Controller	
Video Port:	USB3.0	USB2.0
Input voltage	DC12V	
Camera Dimension	148mm×132mm×161mm	
Package Dimension	28x24x24cm	
Package Content	Camera, Remote Controller, RS232 cable, USB3.0 cable, Power Supply	

## Used For:



**Back of TLC-1000-U2-10**



**Back of TLC-1000-U3-10**



**Telecam Technology Co.,Ltd**

Add.:6 Floor, Building A, Shuanghuan Information Technology Industrial Park, No.8, Baoqing Rd,  
Longgang District,Shenzhen,518116,China

Tel: +86-755-33275155

<https://www.telycam.com>