
4K USB3.0 SERIES

TLC-200-U3-110 4K USB3.0 UHD Video Conferencing Camera





Telycam

TLC-200-U3-110 4K USB3.0 UHD Video Conferencing Camera



TLC-200-U3-110 is a professional 4K Ultra HD video conferencing camera, no PSU requested, power/control/video from USB3.0 and USB2.0, ideal option for video conferencing in huddle room and small space.



PRODUCT ADVANTTAGE



- Adopt the most advanced image DSP and 1/2.5" 8.51MP sensor.
- Used high quality 12MP optical full glass lens, output ultra-high definition and crisp image.
- Power via USB, a single USB cable for video output, camera control and power supply directly, friendly-use and flexible operation.
- Fast video switch: only 1 second.
- Unique and patent camera housing and mechanism design.
- Field firmware upgrade to simplify compatibility.
- Matched with full function IR remote controller, to control camera' s electronic PTZ movement.
- 2 years warranty

PRODUCT FEATURES

- 4x digital zoom
- Support max 3840x2160@30 UHD resolution
- 110 degree view angle without distortion
- Electronic pan/tilt design, no mechanism problem
- 10 presets available
- Support WDR, 2D noise reduction
- Support image flip function, camera can be installed upside down.

Dimension (unit: mm)

I/O Interface

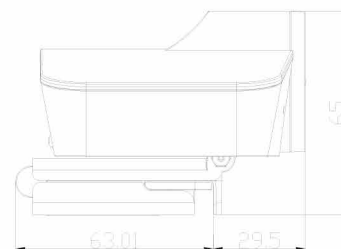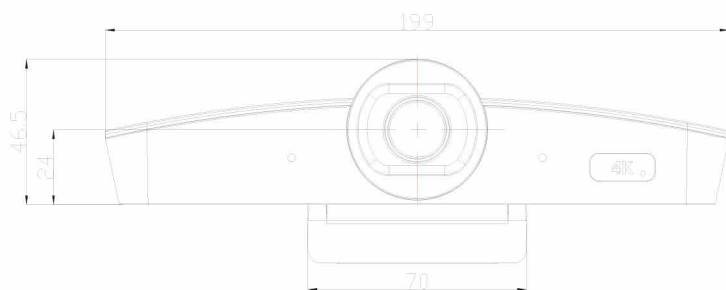

PARAMETERS

Model Number	TLC-200-U3-110			
Sensor	1/2.5 inch high quality 8.51MP CMOS sensor			
	USB3.0		USB2.0	
	MJPG	YUV	MJPG	YUV
Video Format	3840*2160P30/25/15; 2560*1440P30/25/15; 1080P30/25/15; 720P30/25/15; 160*120P30/25/15; 176*144P30/25/15; 320*240P30/25/15; 352*288P30/25/15; 640*480P30/25/15; 640*480P30/25/15; 1600*896P30/25/15; 1024*576P30/25/15; 960*540P30/25/15; 848*480P30/25/15; 960*540P30/25/15; 848*480P30/25/15; 800*600P30/25/15; 800*448P30/25/15; 800*600P30/25/15; 800*448P30/25/15; 640*360P30/25/15; 480*270P30/25/15; 320*180P30/25/15;	1080P30/25/15; 720P30/25/15; 160*120P30/25/15; 176*144P30/25/15; 320*240P30/25/15; 352*288P30/25/15; 640*480P30/25/15; 1024*576P30/25/15; 960*540P30/25/15; 848*480P30/25/15; 800*600P30/25/15; 800*448P30/25/15; 640*360P30/25/15; 480*270P30/25/15; 320*180P30/25/15;	3840*2160P30/25/15; 2560*1440P30/25/15; 1080P30/25/15; 720P30/25/15; 160*120P30/25/15; 176*144P30/25/15; 320*240P30/25/15; 352*288P30/25/15; 640*480P30/25/15; 640*480P30/25/15; 1600*896P30/25/15; 1024*576P30/25/15; 960*540P30/25/15; 848*480P30/25/15; 960*540P30/25/15; 848*480P30/25/15; 800*600P30/25/15; 800*448P30/25/15; 800*600P30/25/15; 800*448P30/25/15; 640*360P30/25/15; 480*270P30/25/15; 320*180P30/25/15;	1080P5; 720P15/5; 160*120P30/25/15; 176*144P30/25/15; 320*240P30/25/15; 352*288P30/25/15; 640*480P30/25/15; 1600*896P5; 1024*576P25/15; 960*540P30/25/15; 848*480P30/25/15; 800*600P30/25/15; 800*448P30/25/15; 640*360P30/25/15; 480*270P30/25/15; 320*180P30/25/15;
Zoom	4x digital zoom			
Horizontal view angle	110°			
F.no.	2.0			
Focal distance	f = 2.22mm			
Preset	Remote: 10;			
Control interface	USB			
Noise reduction	2D			
Minimum Lux	0.1 lux			
White balance	Auto / Manual/Auto Tracking/OnePush/Indoor/Outdoor			
Anti-Flicker	OFF/50Hz/60Hz			
Gamma	Support			
In-ceiling Mount	Support			
Mirror	Support			
Focus	Fixed			
Iris	Fixed			
Electronic shutter	Auto/Manual			
BLC	Support			
Image Flip	Support			
USB power	Support			
Input Voltage	5V 900mA			
Dimension (W x H x W)	220mm×173mm×117mm			