


Thermo Scientific Orion Star A111

Basic pH benchtop meter

Thermo Scientific™ Orion™ Star A111 pH Benchtop Meters make it easy and affordable to take simple, accurate pH measurements.

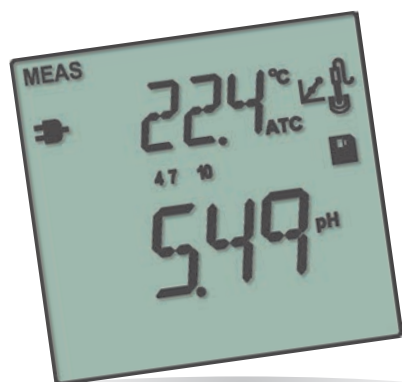

Thermo Scientific Orion Star A111 pH Benchtop Meters combine simplicity with accuracy. A large LCD displays pH or mV readings along with temperature. Icons provide quick updates on battery life, electrode status and calibration information. Simple button layout and onscreen messages help with calibration and setup menu choices.

Features and Benefits

- Large, informative screen clearly shows the main information, including pH or mV reading, temperature in °C or °F, meter mode, calibration information and power source
- Don't miss a reading—AUTO-READ™ locks in the stable reading on your screen and ready indicator alerts when continuous readings are stable
- Up to 3 point pH calibration with easy recall of calibration point and slope data

- Automatic recognition of USA/NIST and DIN buffers or manual option for custom buffer values
- Non-volatile memory holds up to 50 data points
- Included electrode arm and holder make it easier to maintain and place probes into samples
- Plug the meter into almost any power outlet with the included universal power adapter, or use four AA batteries (sold separately) for added flexibility
- The IP54-rated housing handles splashes and can be wall-mounted if table space is limited
- 3 year meter replacement warranty

Thermo
SCIENTIFIC

Thermo Scientific Orion Star A111 pH Benchtop Meter

| Specifications | |
|--------------------|---|
| pH | Range: -2.00 to 16.00 Resolution: 0.1, 0.01 Relative Accuracy: ±0.01 pH Calibration Points: Up to 3 |
| mV | Range—mV: ±1600.0 mV Range—RmV: ±1999.9 mV Resolution: 0.1 mV Relative Accuracy: ±0.2 mV or ±0.05 % of reading whichever is greater Relative mV Calibration: Yes |
| Temperature | Range: -5 to 105 °C, 23 to 221 °F Resolution: 0.1 °C, 0.1 °F Relative Accuracy: ±0.1 °C, ±0.1 °F Temperature Compensation: Automatic or manual Temperature Offset Calibration: Yes |
| Datalogging | Number of Points: 50 Log Function: Manual, Automatic with AUTO-READ |
| Inputs | pH Electrode: BNC ATC Probe: 8-pin mini-DIN |
| Power | AC Adapter: Included—universal, 100-240 VAC Battery Power: Optional—4 AAs Battery Life: 2000 hrs |



Redesigned electrode arm and holder

Meter Ordering Information

| Part No. | Description |
|------------------|---|
| STARA1110 | Orion Star A111 pH Benchtop Meter - Electrode stand, universal power adapter, literature and test certificate |
| STARA1115 | Orion Star A111 pH Benchtop Meter Standard Kit - 9157BNMD Orion Triode refillable, epoxy-body pH/ATC electrode - 916099 Orion 60 mL pH buffer kit - Electrode stand, universal power adapter, literature and test certificate |
| STARA1116 | Orion Star A111 pH Benchtop Meter TRIS-Compatible Kit - GD9156BNWP Orion Green double junction refillable, epoxy-body pH electrode - 927007MD Orion stainless steel ATC probe - Electrode stand, universal power adapter, literature and test certificate |
| STARA1117 | Orion Star A111 pH Benchtop Meter ROSS TRIS-Compatible Kit - 8157BNUMD Orion ROSS Ultra Triode refillable epoxy-body pH/ATC electrode - 810199 Orion ROSS pH buffer kit - Electrode stand, universal power adapter, literature and test certificate |

Accessories Ordering Information

| Part No. | Description |
|------------------|--|
| STARA-BEA | Orion Star A series electrode arm, holder and benchtop meter-attachable base plate |
| STARA-HB | Orion Star A series freestanding base for electrode arm and holder |
| 9172BNWP | Orion Sure-Flow refillable, glass-body pH electrode |
| 9165BNWP | Orion Sure-Flow refillable, epoxy-body pH electrode |
| 9107BNMD | Orion Triode gel-filled, epoxy-body pH/ATC electrode |
| 927007MD | Orion stainless steel ATC temperature probe |
| 910104 | Orion pH 4.01 buffer, 475 mL |
| 910107 | Orion pH 7.00 buffer, 475 mL |
| 910110 | Orion pH 10.01 buffer, 475 mL |
| 910001 | Orion pH electrode storage solution, 475 mL |
| 810001 | Orion ROSS pH electrode storage solution, 475 mL |
| 9678BNWP | Orion Sure-Flow refillable epoxy-body ORP electrode |
| 967901 | Orion ORP standard solution, 475 mL |

For more information, contact your local Thermo Scientific products dealer or call our customer and technical service experts at 1-800-225-1480 (for the US and Canada) or visit www.thermoscientific.com/water.

thermoscientific.com/water

© 2016 Thermo Fisher Scientific Inc. All rights reserved.

All trademarks are the property of Thermo Fisher Scientific and its subsidiaries unless otherwise specified.



Water and Lab Products

North America

Toll Free: 1-800-225-1480
Tel: 1-978-232-6000
info.water@thermofisher.com

Germany

Tel: (49) 6184-90-6000
info.water.uk@thermofisher.com

India

Tel: (91) 22-4157-8800
wai.asia@thermofisher.com

Japan

Tel: (81) 045-453-9175
wai.asia@thermofisher.com

China

Tel: (86) 21-68654588
wai.asia@thermofisher.com

Singapore

Tel: (65) 6778-6876
wai.asia@thermofisher.com

Australia

Tel: (613) 9757-4300
In Australia: (1300) 735-295
InfoWaterAU@thermofisher.com

S-STARA111-E 0216 RevD

Thermo
SCIENTIFIC

A Thermo Fisher Scientific Brand