Key Features

32"

DISPLAY

IPS


PANEL

Pantone Validated Display | Designer Mode | Factory Calibrated | vDisplayManager | Reduce Clutter with Single-Cable Solution



## Product **Description**

Engineered to deliver unmatched color accuracy crucial for professional applications, the ViewSonic<sup>®</sup> VP3256-4K UHD monitor displays your work with the vivid and lifelike color it deserves. With a SuperClear<sup>®</sup> IPS panel for 100% sRGB and a sleek 3-sided frameless design, the VP3256-4K provides a near-seamless viewing experience. The VP3256-4K is equipped with USB-C for single cable connectivity to deliver video, audio, and 60W of power delivery. To ensure precise, uniform color, each of our monitors is factory calibrated to deliver an amazing Delta E <2, so you can be confident what you see on screen is what your customers will see, as well.

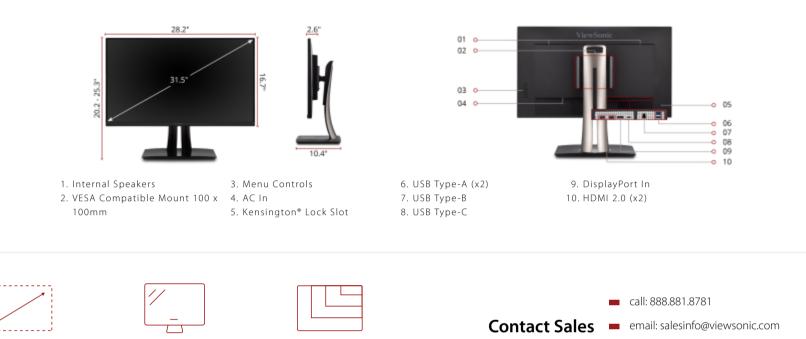

3840 x 2160

RESOLUTION

visit: viewsonic.com





Display:		Operating Conditions:	
Display Size (in.):	32	Temperature:	32-104° F (0 - 40° C)
Viewable Area (in.):	31.5	Humidity (non-condensing):	20-90%
Panel Type:	IPS	Mount:	
Resolution:	3840 x 2160	VESA Compatible:	100 x 100 mm
Resolution Type:	4K (3840x2160)	Video Signal:	
Static Contrast Ratio:	1,000:1	Frequency Horizontal:	TMDS, PCI-E, Micro-Packet: 15 ~ 136 KHz
Dynamic Contrast Ratio:	20,000,000:1	Frequency Vertical:	TMDS, PCI-E, Micro-Packet: 24 ~ 75 Hz
Light Source:	LED	Ergonomics:	
Brightness:	350 cd/m2	Height Adjust:	130 mm / 5.1 in
Colors:	1.07B	Swivel:	120°
Color Space Support:	10 bit (8 bit + A-FRC)	Pivot (Right/Left):	90° / 90°
Aspect Ratio:	16:9	Tilt (Forward/Back):	5° / 21°
Response Time (Typical GTG):	5ms	Weight (imperial):	
Viewing Angles:	178º horizontal, 178º vertical	Net (lbs):	24.0
Backlight Life (Hours):	30,000	Net Without Stand (lbs):	15.8
Panel Surface:	Anti-Glare type, Hard-coating (3H), Haze 25%	Gross (lbs):	33.7
Compatibility:		Weight (metric):	
PC Resolution (max):	3840 x 2160	Net (kg):	10.9
Mac <sup>®</sup> Resolution (max):	3840 x 2160	Net Without Stand (kg):	7.2
Connector:	5040 X 2100	Gross (kg):	15.3
USB Type A(2), USB Type B(1), USB Type C(1), HDMI 2.0 ln(2), DisplayPort(1)		Dimensions (imperial) (WxHxD):	
Audio:		Packaging (in.):	33.1 x 20.5 x 12.8
Internal Speakers:	3W (x2)	Physical (in.):	28.2 x 20.2~25.4 x 10.4
Power:		Physical Without Stand (in.):	28.2 x 16.7 x 2.6
Eco Mode (Conserve):	32W	Dimensions (metric) (WxHxD)	
Eco Mode (optimized):	39W	Packaging (mm):	840.0 x 520.0 x 326.0
Consumption (typical):	46W	Physical (mm):	715.0 x 514.0~644.0 x 265.0
Consumption (max):	125W	Physical Without Stand (mm):	715.0 x 423.0 x 66.0
Voltage:	100-240 VAC	General:	
Stand-by:	0.5W	Regulations: cTUVus, FCC-B, ICES003, CEC, MX-CoC, Mexico Energy	
Power Supply:	Internal	PACKAGE CONTENTS: VP3256-4K, Power Cable, USB-C Cable, HDMI cable	
Additional Hardware:		Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.	
Kensington Lock Slot:	1	Warranty: Three-year limited warranty on parts, labor and backlight	
Controls:		UPC: 766907014532	
Physical Controls:	Key 1 (power), Key 2, Key 3, Key 4, Key 5 (favorite)	Accessories: LCD-MA-001, MH32S1	
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu		

Copyright © ViewSonic Corporation 2000-2022. All rights reserved. (10/27/2022 10:50 AM PST)



