



Key Features

Pre-Installed DisplayItXpress Digital Signage Software |
Powerful Octa-Core SoC | Ultra HD Video Playback | Slim,
Compact Industrial Design | Versatile Connectivity




Product Description


For extreme reliability and stunning 4K Ultra HD multimedia playback, the ViewSonic® NMP520-WX network media player delivers dynamic messaging to large format displays. Equipped with the latest Rockchip RK3368 Octa Core Cortex-A53 64-bit SoC, the NMP520-WX delivers high performance in a small package. It's slim, compact design is ideal for out-of-site installation behind digital signage. Despite its size, there are full connectivity ports such as HDMI 2.0, USB 2.0, Wired Gigabit-LAN, Wireless LAN, Bluetooth, Variable Audio Out and SD Card Reader. Thanks to 16GB of built-in memory, this media player can store and play hours and hours of stunning high-definition content. What's more, with Android 5.1.1 OS, the NMP520-WX is compatible with industry standard digital signage software. Perfect for retail, hospitality, and point-of-sale advertising, the NMP520-WX is the media player you can trust to deliver reliable messaging and dynamic multimedia for any of your large format displays. Includes DisplayItXpress CMS Software and license for one device.

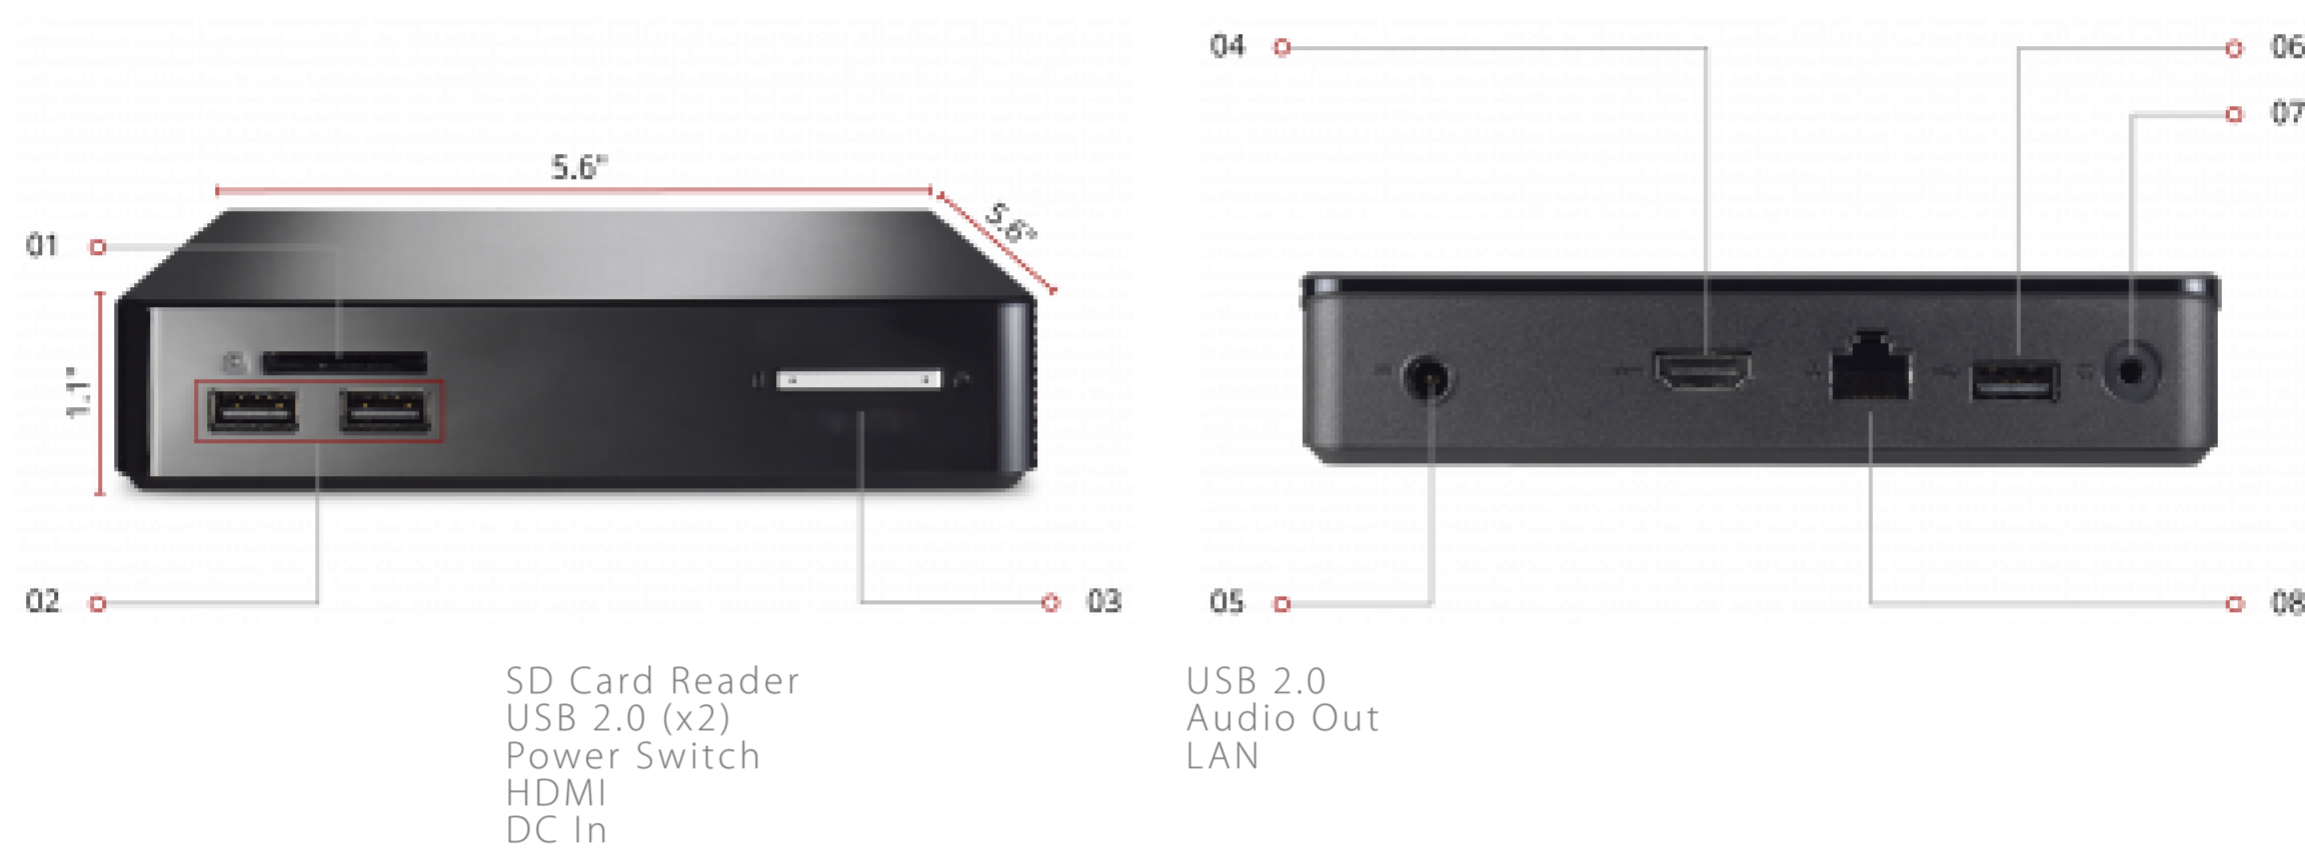

Rockchip RK3368
Octa-Core Cortex-A53
64-bit



Android™ 8.1



16GB
eMMC

System:

Media Player Type:	Media Player
CPU Processor Type:	Rockchip RK3368 Octa-Core Cortex-A53 64-bit
CPU Processor Speed:	1.5GHz
Operating System:	Android™ 8.1
Display Output:	1 HDMI 2.0 (up to 4Kp60)
Real-time Clock (RTC):	Yes

Graphics:

Graphic Chipset:	PowerVR SGX6110 GPU (Supports H.265 4K@60fps)
------------------	---

Memory:

RAM:	2GB
Memory Type:	DDR3L SDRAM

Networking:

Ethernet LAN:	Gigabit ethernet
Wifi:	Intel® 802.11b/g/n/ac
Bluetooth:	Bluetooth 4.0

Storage:

Storage Capacity:	16GB
Storage Type:	eMMC

Connector:

HDMI 2.0(1), Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), USB 2.0 Type A(3), SD Card Slot(1)

Power:

Consumption (typical):	8W
Consumption (max):	24W
Voltage:	12V DC; 2A
Stand-by:	<0.5W

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	30-80%

Mount:

VESA Compatible:	75 x 75 / 100 x 100 mm
------------------	------------------------

Dimensions (imperial) (WxHxD):

Physical (in.):	5.6 x 1.1 x 5.6
Packaging (in.):	11.0 x 2.0 x 7.5

Dimensions (metric) (WxHxD):

Physical (mm):	141.0 x 29.0 x 141.0
Packaging (mm):	279.4 x 50.8 x 190.5

Weight (imperial):

Net (lbs):	0.6
Gross (lbs):	2.0

Weight (metric):

Net (kg):	0.3
Gross (kg):	0.9

General:

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

Regulations: CE, FCC, BSMI, RCM, CCC, R&TTE, CB, BSMI, ETL, RoHS, EuP Lot 6

PACKAGE CONTENTS: NMP520-WX, Power Adapter, VESA Mount Bracket, Screws, Quick Start Guide

Warranty: One-year limited warranty on parts and labor

UPC: 766907005677

Accessories:

CDE3204, CDE4302, CDE4803-H, CDE5010, CDE5510, CDE6510, CDE7500, CDE8600, CDE9800, CDM4300R, CDM4300T, CDM4900R, CDM5500R, CDM5500T, CDX4952, CDX4952-B4, CDX4952-B9, CDX5552, CDX5552-B4, CDX5552-B9, CDX5562, CDX5562-B4, CDX5562-B9, EP4320-2, EP5500D-1, EP5500D-2, EP5500D-4, EP5540, EP5540T, cde4803, cdp9800