



Key Features

Bright Images in any Environment | Up to 20,000 hours
lamp life | Easy LAN Control | SuperColor: Amazing Color
Accuracy



Product Description


The ViewSonic® PG706WU WUXGA projector features 4,000 lumens, 1920x1200 native resolution, an intuitive, user-friendly design, and a sleek white chassis. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment. Equipped with Crestron® LAN controller, this projector makes it easy for IT admin to remotely control and manage multiple projectors from their workstations. With 1.1x optical zoom, vertical keystone, and extensive connectivity, the PG706WU provides flexible and quick set-up. What's more, an energy-saving SuperEco™ feature reduces power consumption and extends the lamp life by up to 20,000 hours. The PG706WU is the ideal projector for both high-definition presentations and vibrant multimedia entertainment.

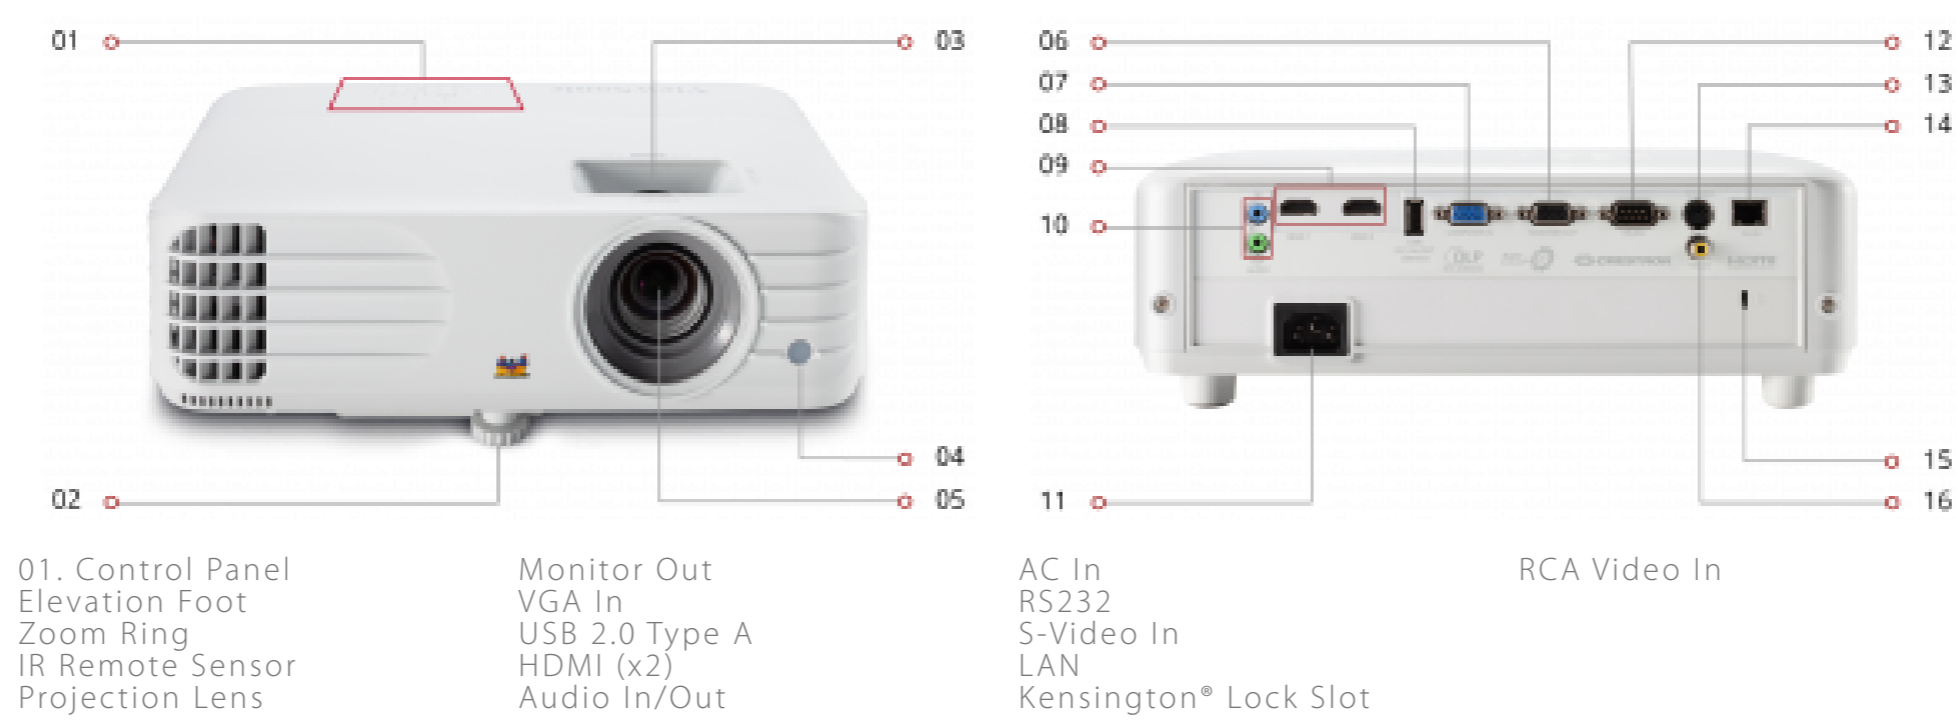

1920 x 1200
RESOLUTION



4,000 ANSI
LUMENS



1.5-1.65
THROW RATIO

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Type:	DLP Lamp
Resolution Type:	WUXGA (1920x1200)
Resolution:	1920 x 1200
Brightness (Lumens):	4,000 ANSI
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Throw Distance:	3.3 - 36.0 ft / 1.0 - 11.0 m
Throw Ratio:	1.5-1.65
Keystone:	Vertical (+/- 40°)
Lens:	1.1x optical zoom
Light Source (watt):	245
Light Source Life, Normal (hours):	4000
Light Source Life, Dynamic Eco-Mode (hours):	20000
Color Depth:	1.07B Color (R/G/B 10bit)
Dynamic Contrast Ratio:	12,000:1
Aspect Ratio:	16:10

Video Signal:

Frequency Horizontal:	15K~102KHz
Frequency Vertical:	23~120Hz

Compatibility:

PC Resolution (max):	1920 x 1200
Mac® Resolution (max):	1920 x 1200

Connector:

USB 2.0 Type A(1), Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI 1.4(1), HDMI 1.4 (with HDCP 1.4)(1), VGA In(1), VGA Out(1), Composite RCA Video In(1), S-Video In(1)

Audio:

Internal Speakers:	10W (x1)
--------------------	----------

Power:

Consumption (typical):	355W
Stand-by:	<0.5W

Controls:

Physical Controls:	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	0-90%

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Weight (imperial):

Net (lbs):	6.2
Gross (lbs):	8.7

Weight (metric):

Net (kg):	2.8
Gross (kg):	4.0

Dimensions (imperial) (WxHxD):

Packaging (in.):	16.3 x 11.7 x 6.6
Physical (in.):	12.3 x 4.3 x 8.7

Dimensions (metric) (WxHxD):

Packaging (mm):	415.0 x 297.0 x 168.0
Physical (mm):	312.0 x 108.0 x 222.0

General:

Regulations: FCC, cTUVus, ROHS
PACKAGE CONTENTS: PG706WU projector, power cable, VGA cable, remote control, Quick Start Guide

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

UPC: 766907001808

Accessories:

HB10B, IFP2710, PGD-350, PJ-SCW-1001W, PJ-WMK-006, PJ-WMK-007, RLC-120, VC10, VCB10