


Key Features

SuperColor: Amazing Color Accuracy |
 Large Images In Small Spaces | 3,500
 Lumen Brightness | Horizontal and Vertical
 Keystone | Long Lamp Life



Product Description

The ViewSonic® PS600W networkable projector features 3,500 lumens, native WXGA 1280x800 resolution, and an intuitive, user-friendly design. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment, and a 10W speaker delivers incredibly clear and audible sound. A short throw lens with a 0.49 throw ratio offers large projection images for smaller rooms. With HV keystone, corner adjustment, and easy network management, the PS600W provides flexible setup. Designed with smarter features and extensive connectivity, the networkable short throw PS600W is ideal for use in education and corporate environments.

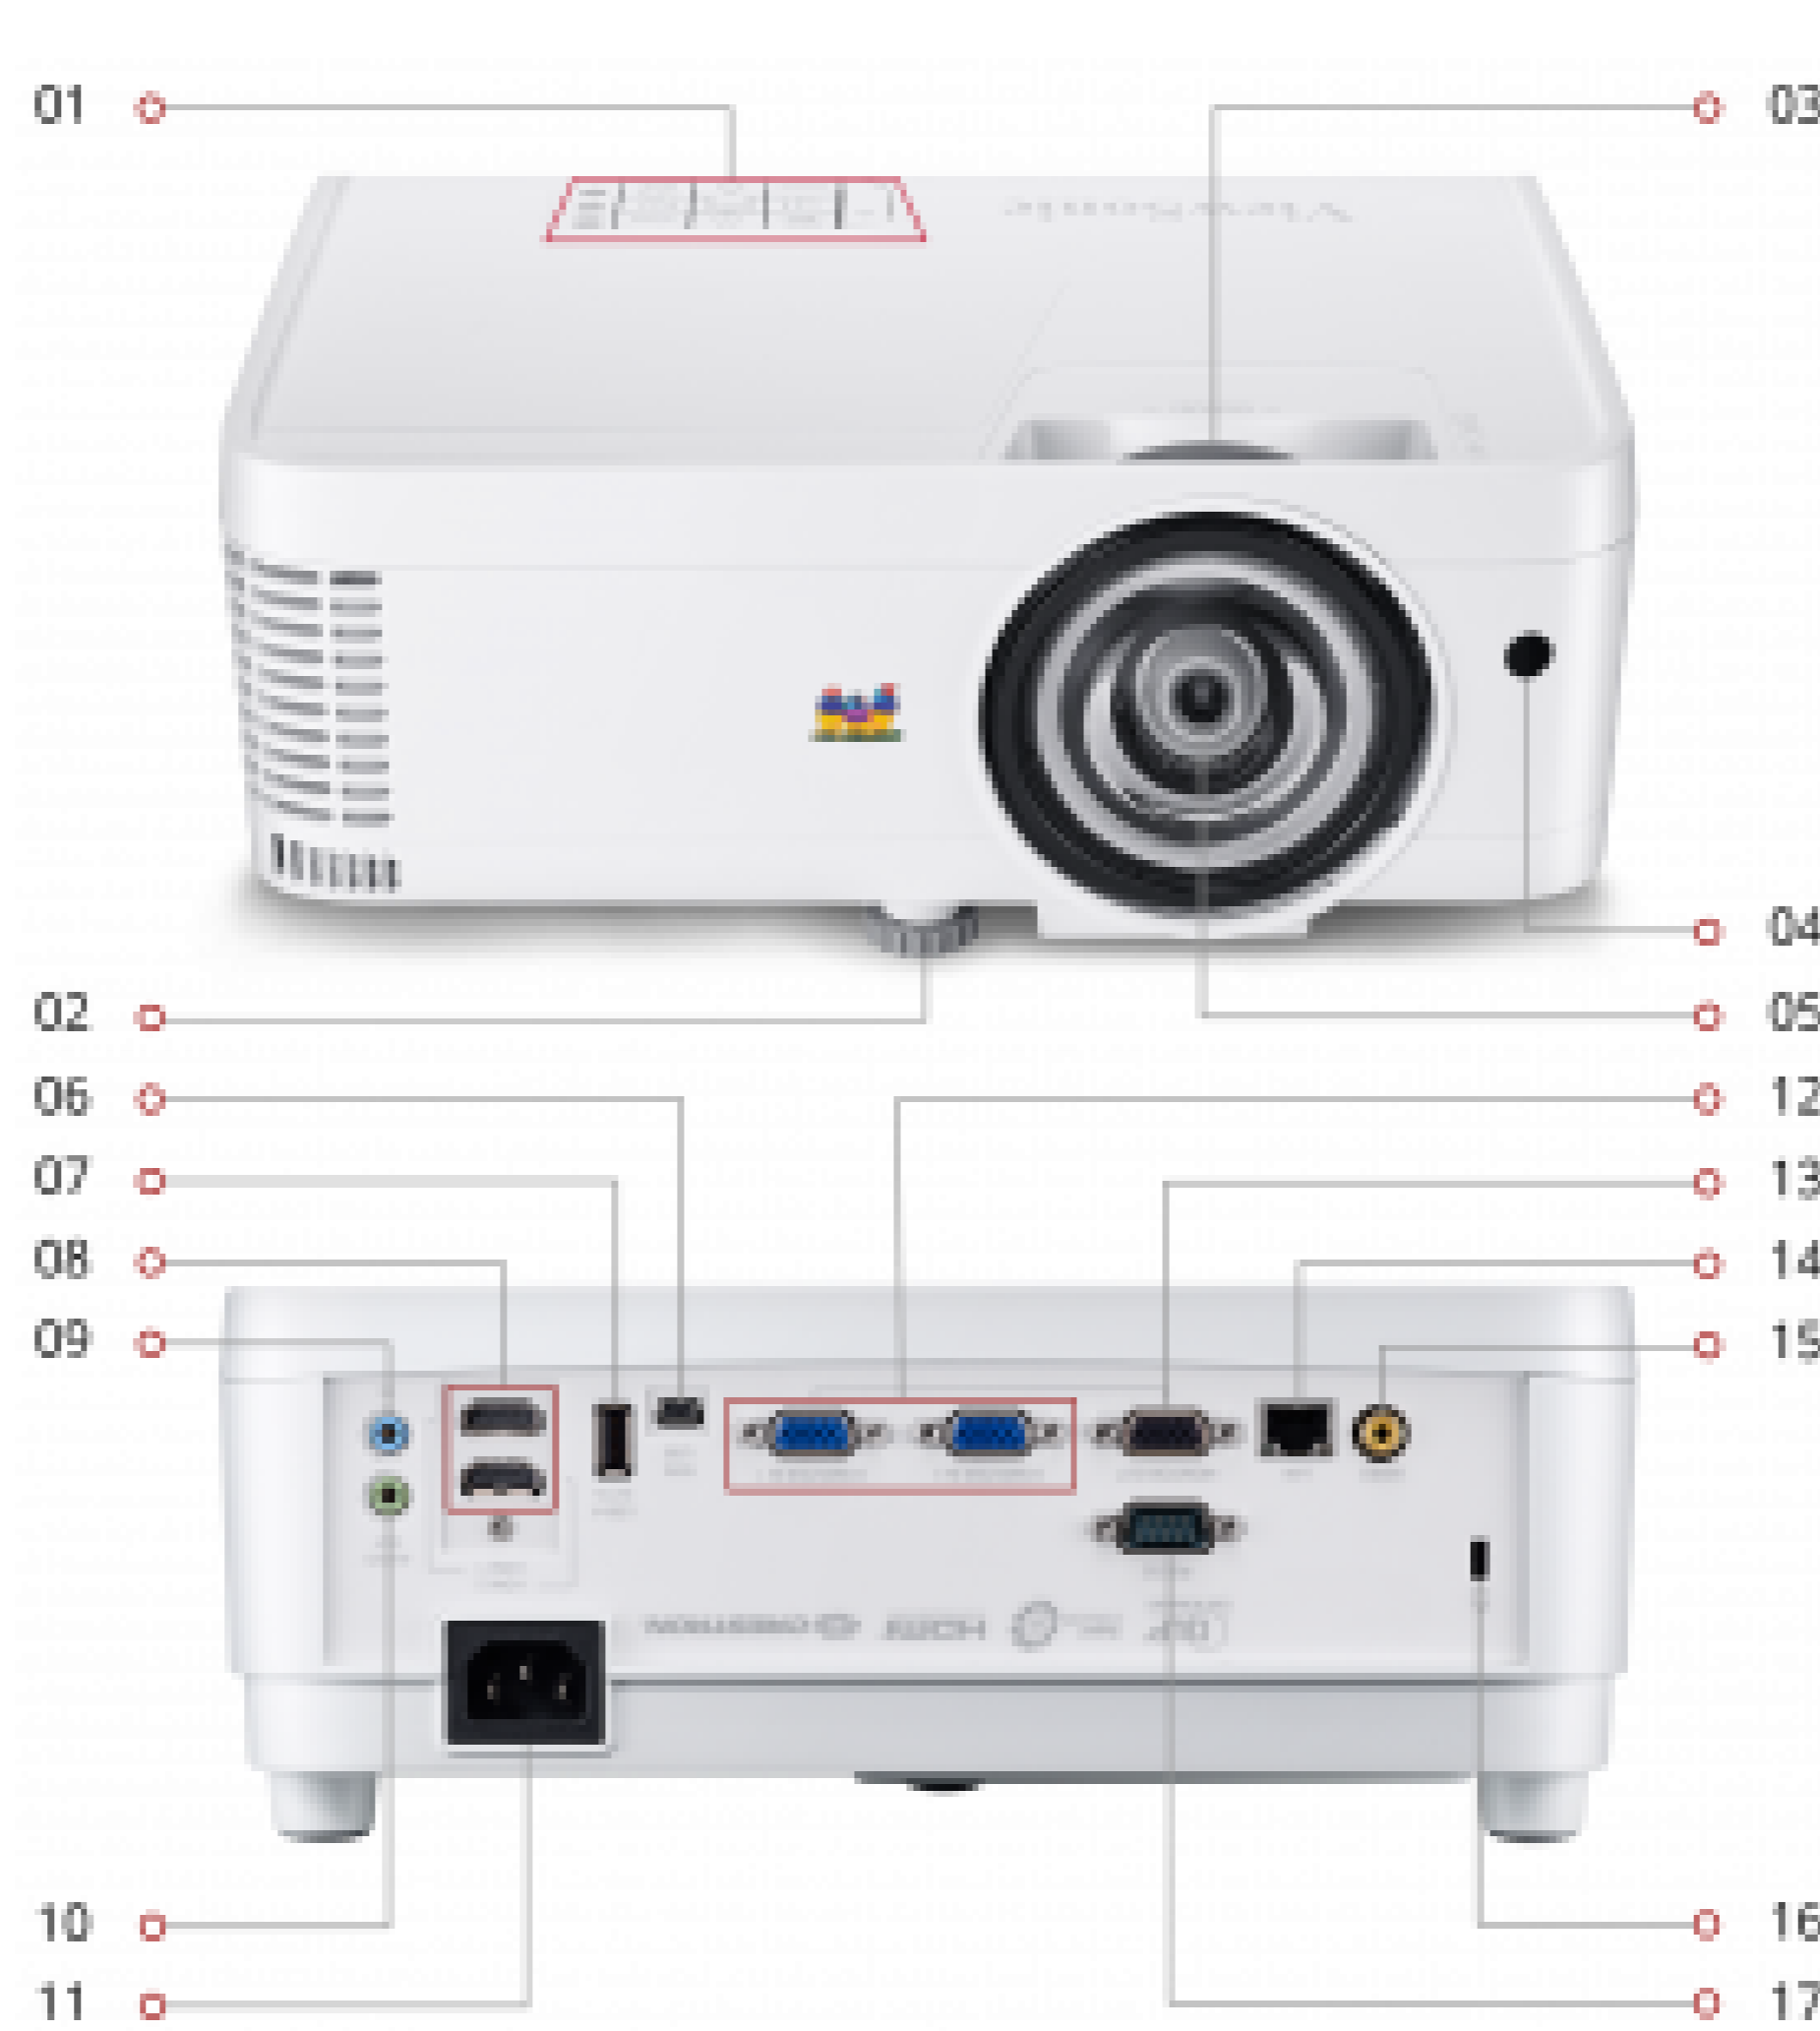


01 Menu Controls
 02 Elevation Feet
 03 Zoom Ring
 04 IR Remote Sensor
 05 Projection Lens


06 USB Mini
 07 USB 2.0 Type A
 08 HDMI (x2)
 09 Audio In
 10 Audio Out

11 AC In
 12 VGA In (x2)
 13 Monitor Out
 14 LAN
 15 Video


16 Kensington® Lock Slot
 17 RS232

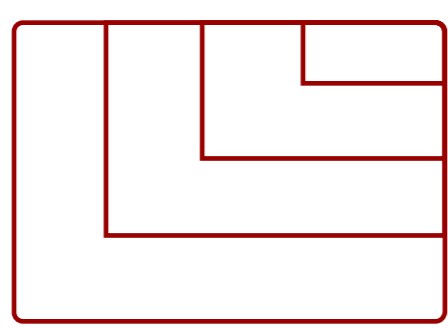

1280 x 800
RESOLUTION



3,500 ANSI
LUMENS

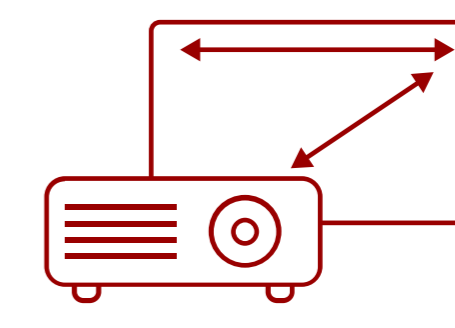

0.5
THROW RATIO

Contact Sales

call: 888.881.8781

email: salesinfo@viewsonic.com

visit: viewsonic.com

Display:

Type:	DLP Lamp
Resolution Type:	WXGA (1280x800)
Resolution:	1280 x 800
Brightness (Lumens):	3,500 ANSI
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Throw Distance:	2.1 - 6.2 ft / 0.6 - 1.9 m
Throw Ratio:	0.5
Keystone:	Vertical (± 40°) / Horizontal (± 26°)
Lens:	Fixed Zoom
Light Source (watt):	200
Light Source Life, Normal (hours):	5000
Light Source Life, Dynamic Eco-Mode (hours):	15000
Color Depth:	1.07B Color (R/G/B 10bit)
Dynamic Contrast Ratio:	22,000:1
Aspect Ratio:	16:10

Video Signal:

Frequency Horizontal:	15K~102KHz
Frequency Vertical:	23~120Hz

Compatibility:

PC Resolution (max):	1920 x 1080
PC Resolution (min):	640 x 480
Mac® Resolution (max):	1920 x 1080
Mac® Resolution (min):	640 x 480

Connector:

USB 2.0 Type A(1), Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI 1.4(2), VGA In(2), VGA Out(1), Composite RCA Video In(1), Mini USB(1)

Audio:

Internal Speakers:	10W (x1)
--------------------	----------

Power:

Voltage:	100-240V+/- 10%, 50/60Hz AC
Consumption (typical):	260W
Stand-by:	<0.5W

Controls:

Physical Controls:	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
--------------------	---

On Screen Display:

Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	0-90%

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Weight (imperial):

Net (lbs):	5.7
Gross (lbs):	7.2

Weight (metric):

Net (kg):	2.6
Gross (kg):	3.3

Dimensions (imperial) (WxHxD):

Packaging (in.):	14.4 x 7.4 x 11.8
Physical (in.):	11.5 x 4.5 x 9.3

Dimensions (metric) (WxHxD):

Packaging (mm):	365.0 188.0 x 300.0
Physical (mm):	292.0 x 115.0 x 236.0