




## Key Features

- Resistive Touch Technology | MEGA Dynamic Contrast Ratio | Control Multiple Devices | Ergonomic Design

## Product Description

The TD1711 is a 17" 5:4 aspect ratio monitor with resistive touch technology. With a robust, pressure-sensing touchscreen that is resistant to screen contamination, the TD1711 is ideal for use in retail, POS, and commercial environments. Resistive touch technology on the TD1711 is also fully functional in gloved environments and compatible with styluses. Featuring 20M:1 MEGA Dynamic Contrast Ratio, the TD1711 delivers extremely sharp and crisp images. Flexible connectivity options include VGA, HDMI with CEC, RS232, and USB ports. A VESA-mountable design offers additional convenience for use as a wall-mounted display. Industry-leading warranty protection and ViewSonic product quality makes this durable touch display a great long-term investment for a variety of environments.

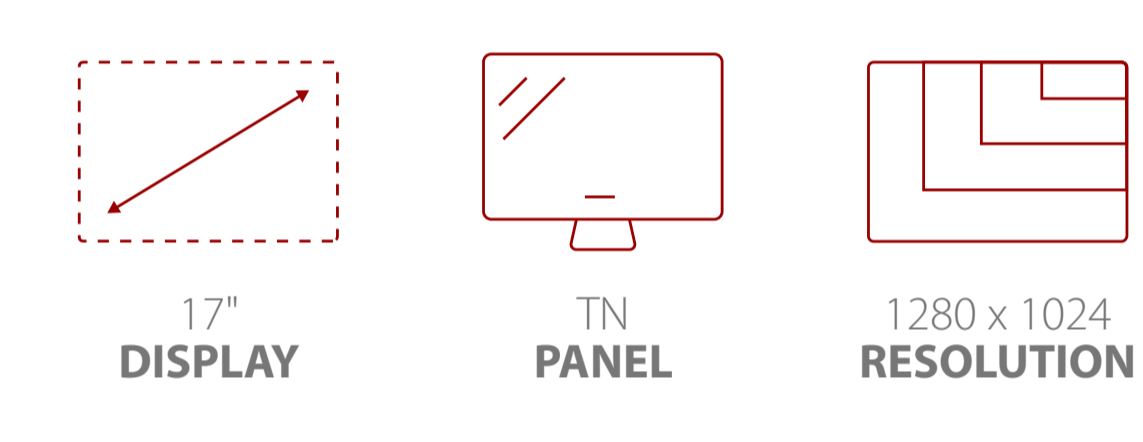

<b>Display:</b>		<b>Operating Conditions:</b>	
Display Size (in.):	17	Temperature:	32-104° F (0 - 40° C)
Viewable Area (in.):	17	Humidity (non-condensing):	20-90%
Panel Type:	TN	<b>Mount:</b>	
Resolution:	1280 x 1024	VESA Compatible:	100 x 100 mm
Static Contrast Ratio:	1,000:1	<b>Video Signal:</b>	
Dynamic Contrast Ratio:	20,000,000:1	Frequency Horizontal:	24 ~ 82KHz
Light Source:	WLED	Frequency Vertical:	50 ~ 75Hz
Brightness:	250 cd/m2	<b>Video Input:</b>	
Colors:	16.7M	Digital Sync:	TMDS
Color Space Support:	6 bits + Hi FRC	<b>Ergonomics:</b>	
Aspect Ratio:	5:4	Tilt (Forward/Back):	5° / 90°
Response Time (Typical GTG):	5ms	<b>Weight (imperial):</b>	
Viewing Angles:	170° horizontal, 160° vertical	Net (lbs):	8.6
Backlight Life (Hours):	30,000	Net Without Stand (lbs):	6.0
Panel Surface:	Hard coating (3H), Haze 8% or below	Gross (lbs):	11.7
Refresh Rate (Hz):	60	<b>Weight (metric):</b>	
<b>Compatibility:</b>		Net (kg):	3.9
PC Resolution (max):	1280 x 1024	Net Without Stand (kg):	2.7
<b>Connector:</b>		Gross (kg):	5.3
USB 2.0 Type A(2), USB 2.0 Type B(1), 3.5mm Audio In(1), 3.5mm Audio Out(1), VGA(1), HDMI 1.4 (with CEC)(1), RS232 In(1)		<b>Dimensions (imperial) (WxHxD):</b>	
<b>Touch:</b>		Packaging (in.):	17.7 x 16.3 x 6.8
Touch Technology:	Resistive	Physical (in.):	14.5 x 13.7 x 8.2
Touch Points:	1-Point Touch	Physical Without Stand (in.):	14.5 x 12.4 x 1.9
<b>Audio:</b>		<b>Dimensions (metric) (WxHxD):</b>	
Internal Speakers:	1W (x2)	Packaging (mm):	450.0 x 415.0 x 172.0
<b>Power:</b>		Physical (mm):	368.7 x 347.6 x 208.0
Eco Mode (Conserve):	10.1W	Physical Without Stand (mm):	368.7 x 314.4 x 46.9
Eco Mode (optimized):	11.4W	<b>General:</b>	
Consumption (typical):	12.6W	Regulations: cTUVus, FCC-B, ICES003, Energy Star 7.1, EPEAT Silver, TUV Mexico CoC, Mexico Energy	
Consumption (max):	17W	PACKAGE CONTENTS: TD1711 Display, Power Cable, VGA Cable, USB Cable, Audio Cable, Quick Start Guide	
Voltage:	AC 100-240V (universal), 50-60Hz	Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.	
Stand-by:	0.3W	Warranty: Three-year limited warranty on parts, labor and backlight	
Power Supply:	Internal	UPC: 766907979817	
<b>Additional Hardware:</b>		<b>Accessories:</b>	
Kensington Lock Slot:	1	CB-00008948, CB-00009950, LCD-DMA-001, LCD-DMA-002, LCD-WMK-001	
<b>Controls:</b>			
Physical Controls:	1, 2, 3, 4, Power		
On Screen Display:	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Input Adjust, Information, Manual Image Adjust, Advanced Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)		