


Key Features

SuperClear IPS Panel Technology | Frameless design | Versatile Connectivity | Full HD 1080p Resolution | Optimized View Settings



Product Description

With future-proof connectivity, the ViewSonic® VA2256-mhd is a productivity-boosting monitor perfect for business professionals. Designed with SuperClear® IPS panel technology for wide-angle viewing and incredibly vivid colors, this monitor also features a 3-sided frameless design for a seamless viewing experience in multi-monitor setups. Extensive connectivity options include VGA, HDMI, and DisplayPort so that you can connect to a variety of HD and analog devices – today and tomorrow. In addition, Flicker-Free technology and a Blue Light Filter help to minimize eye strain from extended viewing periods. With ViewSonic’s industry-leading 3-year limited warranty, this monitor is a solid long-term investment for enterprise and home applications.

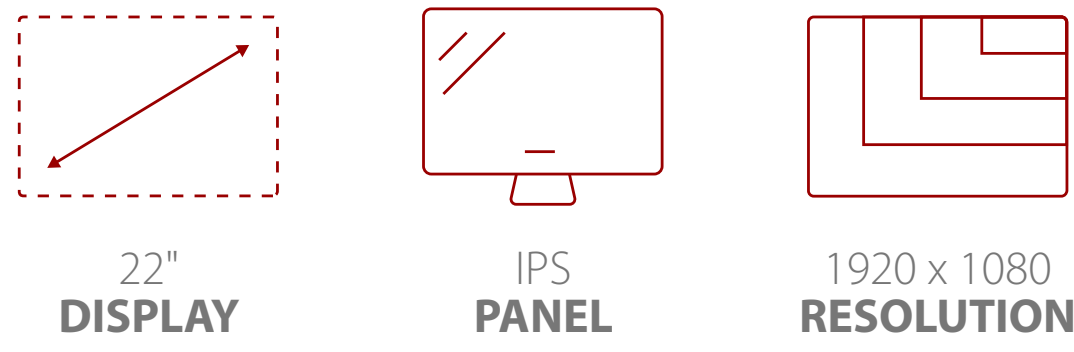

Display:

Display Size (in.):	22
Viewable Area (in.):	21.5
Panel Type:	IPS
Resolution:	1920 x 1080
Static Contrast Ratio:	1,000:1
Dynamic Contrast Ratio:	50,000,000:1
Light Source:	LED
Brightness:	250 cd/m2
Colors:	16.7M
Color Space Support:	6 bits + Hi FRC
Aspect Ratio:	16:9
Response Time (Typical GTG):	15ms
Response Time (GTG w/OD):	7ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30,000
Panel Surface:	Anti-glare, Hard coating (3H)

Compatibility:

PC Resolution (max):	1920 x 1080
Mac® Resolution (max):	1920 x 1080

Connector:

3.5mm Audio In(1), 3.5mm Audio Out(1), VGA(1), HDMI 1.4(1), Display Port(1)

Audio:

Internal Speakers:	2W (x2)
--------------------	---------

Power:

Eco Mode (Conserve):	14W
Eco Mode (optimized):	18W
Consumption (typical):	21W
Consumption (max):	31W
Voltage:	AC 100-240V (universal), 50-60Hz
Stand-by:	0.5W
Power Supply:	Internal

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Controls:

Physical Controls:	Key Buttons 1, 2, 3, 4, 5, 6 (Power)
On Screen Display:	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Advanced Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	20-90%

Mount:

VESA Compatible:	100 x 100 mm
------------------	--------------

Video Signal:

Frequency Horizontal:	HDMI: 15 ~ 83KHz, DP: 24 ~ 83KHz
Frequency Vertical:	HDMI: 50 ~ 75Hz, DP: 50 ~ 75Hz

Video Input:

Digital Sync:	TMDS for HDMI, PCI-E for DisplayPort
---------------	--------------------------------------

Ergonomics:

Tilt (Forward/Back):	4° / 20°
----------------------	----------

Weight (imperial):

Net (lbs):	7.3
Net Without Stand (lbs):	6.4
Gross (lbs):	10.6

Weight (metric):

Net (kg):	3.3
Net Without Stand (kg):	2.9
Gross (kg):	4.8

Dimensions (imperial) (WxHxD):

Packaging (in.):	21.4 x 15.1 x 5.0
Physical (in.):	19.3 x 14.3 x 7.8
Physical Without Stand (in.):	19.3 x 11.7 x 1.9

Dimensions (metric) (WxHxD):

Packaging (mm):	544.0 x 384.0 x 128.0
Physical (mm):	490.0 x 362.3 x 198.4
Physical Without Stand (mm):	490.0 x 296.6 x 48.3

General:

Regulations: cULus, FCC-B, ICES003, Energy Star 7.0, EPEAT Silver, Mexico Energy, MX-CoC
PACKAGE CONTENTS: VA2256-mhd Display, Power Cable, VGA Cable, Audio Cable, Quick Start Guide
Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.
Warranty: Three-year limited warranty on parts, labor and backlight
UPC: 766907961812

Accessories:

CB-00008948, CB-00009950, CB-00010555, CB-00010684, CB-00010958, LCD-EEEW-22-01, LCD-EEEW-22-02, LCD-EW-22-01, LCD-EW-22-02, LCD-EW-22-03, LCD-WMK-001, ViewSplit
