

Key Features

| Ultra HD Resolution

| POWERFUL EMBEDDED SOC PLATFORM

| EMBEDDED LAN AND USB WIRELESS CONNECTIVITY


| VIEWBOARD® CAST CONTENT SHARING SOFTWARE

| Remote Content Sharing from Anywhere



Product Description

The ViewSonic® CDE7512 is a 75" 4K Ultra HD large format wireless presentation display. With features including a razor-sharp resolution of 3840 x 2160, 330-nit high brightness, 178-degree ultra-wide viewing angles, 2 x 10W speakers, and wireless screen sharing, the CDE7512 transforms meeting rooms into a dynamic communications hub. The built-in ViewBoard® Cast screen sharing software* (along with the optional ViewSonic vCastSender app), and myViewBoard Display software, enables both on-site and online users to participate in conferences and simultaneously share content. Equipped with a 1.5GHz Quad-core embedded SoC processor, 2GB RAM, and 16GB of internal memory, the CDE7512 can play multimedia from internal storage or a USB flash drive 16 hours a day, seven days a week. And with remote configuration and content management system support, the ViewSonic® CDE7512 is also suitable for a wide array of diverse signage applications.

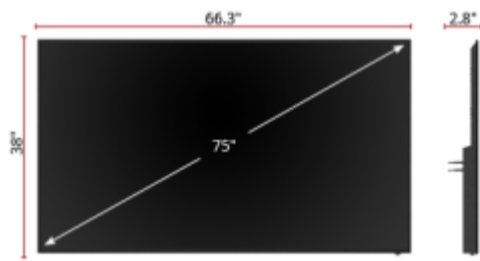


1. AC In
2. USB 2.0 (x2)
3. USB Type-C

4. HDMI 2.0 In (x2)
5. Audio RCA L/R
6. RS232 In



7. SPDIF Out
8. Ethernet Lan (RJ45)
9. Audio 3.5mm Out



75"
DISPLAY



3840 x 2160
RESOLUTION



330 cd/m2
BRIGHTNESS

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Select your preferred Country/Region:



Audio:

Internal Speakers: 10W (x2)

Power:

Voltage: 100-240 VAC +/- 10% Wide Range, 50-60Hz +/-3 Hz

Consumption (max): 300W

Consumption (typical): 240W

Stand-by: <0.5W

Controls:

On Screen Display: Picture, Screen, Audio, Time, Advanced Options, About

Operating Conditions:

Temperature: 32-104° F (0 - 40° C)

Humidity (non-condensing): 20-80%

Embedded Player:

Operating System: Android 9.0

CPU: Quad-core, 1.5GHz, MT9632/ARM Cortex-A53

GPU: Dual Core, G52MP2

Memory: 2GB DDR4

Storage: 16GB (eMMC)

Display:

Static Contrast Ratio: 1,200:1

Viewing Angles: 178° horizontal, 178° vertical

Resolution: 3840 x 2160

Colors: 1.07B

Viewable Area (in.): 75

Dynamic Contrast Ratio: 5,000:1

Backlight Life (Hours): 30,000

Response Time (Typical GTG): 8ms

Light Source: DLED

Brightness: 330 cd/m2

Panel Surface: Hard Coat - Anti-Glare, 1% Haze, 3H with anti-glare treatment

Aspect Ratio: 16:9

Display Size (in.): 75

Weight (metric):

Gross (kg): 36.1

Net (kg): 27.3

Weight (imperial):

Net (lbs): 60.2

Gross (lbs): 79.6

Connector:

RCA Audio In(1), SPDIF Audio Out(1), USB 2.0(1), USB Type C(1), RS232 In(1), HDMI 2.0 In(2), VGA(1), Wi-Fi/Bluetooth Slot(1), Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1)

Dimensions (metric) (WxHxD):

Packaging (mm): 1808 x 1069 x 180

Physical (mm): 1683.8 x 965.3 x 71.3

Dimensions (imperial) (WxHxD):

Packaging (in.): 71.18 x 42.09 x 7.09

Physical (in.): 66.3 x 38.0 x 2.8

Mount:

VESA Compatible: 600 x 400 mm

General:

Regulations: cULus, FCC, Energy Star, RoHS

PACKAGE CONTENTS: CDE7512, Remote control with batteries, Quick Start Guide, Power cable, HDMI Cable, Wall Mount Screws and RS232 cable

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

Warranty: Three-year limited warranty on parts, labor and backlight

UPC: 766907017663

Accessories:

NMP309-W, NMP589-W, NMP620-P10, NMP660, NMP760, VB-STND-001, VB-STND-005, VB-WIFI-001, VBS100-A, WMK-014, WMK-047-2

Copyright © ViewSonic Corporation 2000-2022. All rights reserved. (06/23/2022 01:30 PM PST)

Select your preferred Country/Region:

