## Key **Features**


High-Performance 4K Touchscreen | Sleek and Slim Design | Convenient

USB Type-C | Built-in Microphone Array | Optional Slot-in PC



## Product **Description**

From executive boardrooms to kindergarten classrooms, the ViewSonic\* ViewBoard\* IFP6562 enables limitless collaboration and endless innovation. Designed to help teams connect, collaborate, and create, this next-generation digital whiteboard delivers exactly what you need to move your ideas forward. A premium, state-of-the-art design features a bezel-less PCAP (projected capacitive) touchscreen with incredible 4K Ultra HD resolution. This highly accurate interactive screen provides for an incredibly natural and responsive handwriting experience. Using fingers, styluses, or both, multiple users can simultaneously write or draw on the huge 65" ViewBoard panel. What's more, meetings and presentations start fast thanks to convenient one-wire USB-C connectivity.

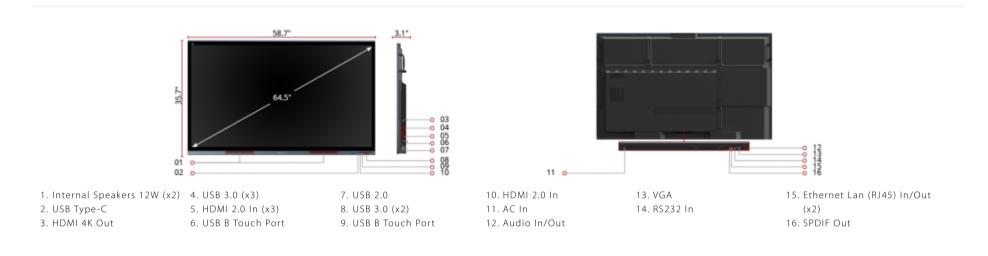

call: 888.881.8781Contact Salesemail: salesinfo@viewsonic.comvisit: viewsonic.com

Display:

Resolution:

Display Type: LCD

Display Size (in.): 65

Viewable Area (in.): 64.5

3840 x 2160

LED

Light Source:

Aspect Ratio: 16:9
Static Contrast Ratio: 5,000:1

Backlight Life (Hours): 30,000
Brightness: 350 cd/m2

Response Time (Typical GTG): 8ms

Viewing Angles: 178° horizontal, 178° vertical

Panel Surface: Anti-glare 9H tempered glass

**Networking:** 

Ethernet LAN: 10/100 Mbps for Embedded Player; 10/100/1000 Mbps for Slot-in

**Embedded Player:** 

OS: Android 8.0

CPU: ARM Quad Core Cortex A73

CPU Processor Speed: 1.2GHz

Memory: 3GB

Storage: 32GB

**Audio:** 

 Internal Speakers:
 12W (x2)

 Subwoofer:
 15W (x1)

**Connector:** 

HDMI 2.0 In(4), HDMI 4K Out(1), 3.5mm Audio Out(1), SPDIF Audio Out(1), USB 3.0(5), USB 2.0(1), USB 3.1 Type C(1), Slot-in PC Slot(1), USB B Touch Port(1), RS232(1), Ethernet LAN (RJ45)(2), WIFI Module Slot(1)

Power:

Voltage: 100-240 VAC

Consumption (max): 390W

Consumption (typical): 115W

Stand-by: <0.5W

**Operating Conditions:** 

Temperature: 32-104° F (0 - 40° C)

Humidity (non-condensing): 10-90%

Touch:

Touch Technology: Projective Capacitive

Touch Points: 20-Point Touch

Tip Detection: Finger or Active Pen

Weight (imperial):

Net (lbs): 82.5
Gross (lbs): 107.8

Weight (metric):

Net (kg): 37.4 Gross (kg): 48.9

Dimensions (imperial) (WxHxD):

Packaging (in.): 63.3 x 39.8 x 8.5

Physical (in.): 58.7 x 35.7 x 3.1

Dimensions (metric) (WxHxD):

Packaging (mm): 1607.0 x 1010.0 x 215.0 Physical (mm): 1492.0 x 907.0 x 78.0

Mount:

VESA Compatible: 600 x 400 mm

General:

Warranty: 3-year limited warranty on parts, labor and backlight, onsite warranty

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

PACKAGE CONTENTS: IFP6562 display, power cable, HDMI cable, USB cable Type C, USB Cable for Touch, Passive Stylus x 2, RS232 Adapter, Clamp x 5, remote control with batteries, Camera plate, screw x 8, Quick Start Guide

Regulations: CTUVus, FCC, Energy 8.0, EPEAT, Mexico, CE, CB, ErP, REACH, UKCA

UPC: 766907012064

**Accessories:** 

VB-STND-001, VB-STND-002, VB-STND-003, VB-STND-004, VB-STND-005, VPC25-W53-O1, VPC25-W53-O1-1B, VPC25-W53-O2, VPC25-W53-O2-1B, VPC27-W55-O2, VPC27-W55-O2-1B, VPC2C-W33-O1, VPC2C-W33-O1-1B, WMK-047-2