

Key Features

Bright Images in Large Spaces | Long-lasting Laser Phosphor Light Source | Convenient Mounting Flexibility | 360-degree Orientation | Dual HDMI 2.0b with 4K HDR/HLG Support




Product Description


Bright and versatile for any professional installation, the ViewSonic® LS920WU WUXGA laser projector delivers everything you need for big screens in big venues. Delivering 6,000 ANSI lumens of advanced high brightness, up to 20,000 hours* of light source life, and a screen size of up to 300", this projector is ideal for auditoriums, boardrooms, restaurants, sports bars and more. This top-notch performer is also easy to deploy and manage with its wide 1.6x optical zoom adjustment, 360° projection, and portrait mode that provide extreme flexibility in even the most challenging installations. Dual HDMI 2.0b / HDCP 2.2 ports ensure access to original 4K quality content with HDR/HLG support. In addition, its compact size and built-in HDBaseT deliver the perfect mix of high-quality projection and cost-effectiveness. *Light source life may vary based on actual usage and other factors.



1. Zoom Ring
2. IR Remote Sensor
3. Control Panel
4. 10W Internal Speaker x2
5. Power Button
6. Zoom/Focus
7. USB 2.0 Type A
8. HDMI 2.0/ HDCP 2.2 x2
9. HDBaseT
10. AC In
11. Kensington® Lock Slot
12. Composite AV In

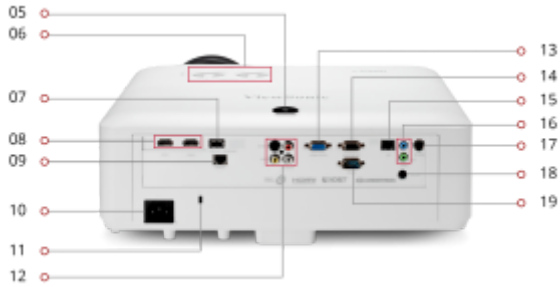


13. VGA In
14. Monitor Out
15. LAN
16. 3.5mm Audio In/Out
17. 3D VESA (sync)
18. 12V Trigger
19. RS232 In



1920 x 1200
RESOLUTION



6,000 ANSI
LUMENS



1.36-2.18
THROW RATIO

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Type:	Laser Phosphor System
Resolution Type:	WUXGA (1920x1200)
Resolution:	1920 x 1200
Brightness (Lumens):	6,000 ANSI
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Throw Distance:	0.88-14.09m (100"@2.93m)
Throw Ratio:	1.36-2.18
Keystone:	Vertical (+/- 40°) / Horizontal (+/- 40°)
Lens:	1.6x optical zoom
Light Source (watt):	Nichia 74W x 2
Light Source Life, Normal (hours):	20000
Color Depth:	1.07 Billion Colors
Aspect Ratio:	16:10
Lens Shift:	Horizontal (50%, -50%) / Vertical (+23%, -23%)

Video Signal:

Frequency Horizontal:	15K~135KHz
Frequency Vertical:	23-120Hz

Compatibility:

PC Resolution (max):	3840 x 2160
PC Resolution (min):	640 x 480
Mac® Resolution (max):	3840 x 2160
Mac® Resolution (min):	640 x 480

Connector:

USB 2.0 Type A(1), Ethernet LAN (RJ45)(1), 3.5mm 12V Trigger(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI 2.0 (with HDCP 2.2)(2), VGA In(1), VGA Out(1), Composite RCA Video In(1), RCA Audio In (L/R)(1), RCA Audio Out(1), 3D VESA(1), HDBT(1)

Audio:

Internal Speakers:	10W (x2)
--------------------	----------

Power:

Voltage:	100-240V+/- 10%, 50/60Hz AC
Consumption (typical):	450W
Stand-by:	<0.5W

Controls:

Physical Controls:	Keypad, Power key
On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
--------------	-----------------------

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Weight (imperial):

Net (lbs):	14.3
Gross (lbs):	19.8

Weight (metric):

Net (kg):	6.5
Gross (kg):	9.0

Dimensions (imperial) (WxHxD):

Packaging (in.):	20.3 x 19.3 x 0.9
Physical (in.):	15.9 x 12.0 x 5.7

Dimensions (metric) (WxHxD):

Packaging (mm):	515.0 x 490.0 x 276.0
Physical (mm):	405.0 x 305.0 x 145.0

General:

Regulations:	cTUVus
PACKAGE CONTENTS:	LS920WU projector, power cable, remote control, Quick Start Guide
Warranty:	Five-year limited warranty on parts and labor, 1-year limited warranty on the light source, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
UPC:	766907008715