


TD2465

Key Features

With responsive in-cell touch technology and an advanced ergonomic design, the ViewSonic® TD2465 touch display delivers hands-on control for industrial applications, office workspaces and classrooms. This 24" (23.8" viewable) Full HD display offers optimized screen performance and 10-point touch tracking that functions effectively whether you're wearing gloves or in a humid climate. USB 3.1 Type-C connectivity provides a single-cable plug-and-play solution for laptops and Chromebooks while DisplayPort output extends desktops and mirrors screens for greater office productivity. Experience a naturalistic writing and drawing experience with a magnetic stylus pen that attaches to the display stand when not in use. From industrial solutions to classroom podiums, the TD2465 puts productivity and interactivity within reach.



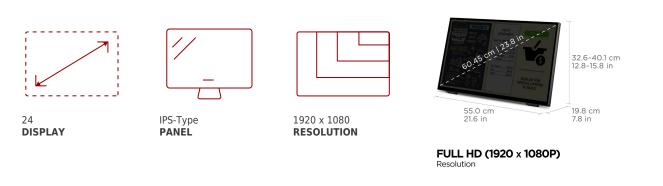

Product **Description**

With responsive in-cell touch technology and an advanced ergonomic design, the ViewSonic® TD2465 touch display delivers hands-on control for industrial applications, office workspaces and classrooms. This 24" (23.8" viewable) Full HD display offers optimized screen performance and 10-point touch tracking that functions effectively whether you're wearing gloves or in a humid climate. USB 3.1 Type-C connectivity provides a single-cable plug-and-play solution for laptops and Chromebooks while DisplayPort output extends desktops and mirrors screens for greater office productivity. Experience a naturalistic writing and drawing experience with a magnetic stylus pen that attaches to the display stand when not in use. From industrial solutions to classroom podiums, the TD2465 puts productivity and interactivity within reach.

Specifications

Display Size (in.)

24

More Information

Panel TypeIPS-TypeResolution1920 x 1080Resolution TypeFull HD (1920x1080)Static Contrast Ratio3,000:1Joynamic Contrast Ratio20M:1Light SourceLEDBrightness250 cd/m2Colors16.7M	
Resolution TypeFull HD (1920x1080)Static Contrast Ratio3,000:1Dynamic Contrast Ratio20M:1Light SourceLEDBrightness250 cd/m2	
Static Contrast Ratio 3,000:1 Dynamic Contrast Ratio 20M:1 Light Source LED Brightness 250 cd/m2	
Dynamic Contrast Ratio 20M:1 Light Source LED Brightness 250 cd/m2	
Light Source LED Brightness 250 cd/m2	
Brightness 250 cd/m2	
Colors 16.7M	
Color Space Support 8 bit (6 bit + Hi-FRC)	
Aspect Ratio 16:9	
Response Time (Typical GTG) 7ms	
Viewing Angles 178° horizontal, 178° vertical	
Backlight Life (Hours) 30,000	
Panel Surface Glossy, Hardness 7H	
PC Resolution (max) 1920 × 1080	
Mac® Resolution (max) 1920 × 1080	
USB Type A 2	
USB 2.0 Type B 1	
3.5mm Audio In 1	
3.5mm Audio Out 1	
VGA 1	
HDMI 1.4 In 1	
DisplayPort 1	
Touch Technology Projective Capacitive	
Touch Points 10-Point Touch	
Internal Speakers 2W (x2)	
Eco Mode (Conserve) 20	
Eco Mode (optimized) 22	
Consumption (typical) 24	
Consumption (max) 26	
Voltage AC 100-240V (universal), 50-60Hz	
Stand-by 0.5	
Power Supply Internal	
Cable Organization No	
Headphone Hook No	

Physical Controls	1, 2, Up, Down, Power
On Screen Display	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall
Temperature	32-104º F (0 - 40º C)
Humidity (non-condensing)	20-90%
VESA Compatible	100 x 100 mm
Frequency Horizontal	24 ~ 82 KHz
Frequency Vertical	50 ~ 75 Hz
Tilt (Forward/Back)	5° / 20°
Net (lbs)	12.5
Net Without Stand (lbs)	10.4
Gross (lbs)	15.8
Net (kg)	5.7
Net Without Stand (kg)	4.7
Gross (kg)	7.2
Packaging (in.)	25.5 " (W) x 16.8 " (H) x 5.4 " (D)
Physical (in.)	21.6 " (W) x 15.82 " (H) x 7.8 " (D)
Physical Without Stand (in.)	21.6 " (W) x 12.8" (H) x 1.9 " (D)
Packaging (mm)	647 mm (W) x 426 mm (H) x 138 mm (D)
Physical (mm)	550 mm (W) x 401 mm (H) x 198 mm (D)
Physical Without Stand (mm)	550 mm (W) x 326 mm (H) x 49 mm (D)
Regulations	cTUVus, FCC-B, ICES003, Energy Star, EPEAT, CEC, NOM, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, UKCA, RCM
PACKAGE CONTENTS	LCD Display, Power Cable, DisplayPort Cable, USB Type C cable, USB A/B Cable, Quick Start Guide
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.
Warranty	Three-year limited warranty on parts, labor and backlight







FLEXIBLE SETUP Adjust your monitor to your exact preference

Contact Sales <u>ViewSonic.com</u> 888.881.8781 email: salesinfo@viewsonic.com