



## Key Features

High-Performance 4K Touchscreen | Sleek and Slim Design | Convenient  
USB Type-C | Built-in Microphone Array | Optional Slot-in PC



## Product Description

From executive boardrooms to kindergarten classrooms, the ViewSonic® ViewBoard® IFP7562 enables limitless collaboration and endless innovation. Designed to help teams connect, collaborate, and create, this next-generation digital whiteboard delivers exactly what you need to move your ideas forward. A premium, state-of-the-art design features a bezel-less PCAP (projected capacitive) touchscreen with incredible 4K Ultra HD resolution. This highly accurate interactive screen provides for an incredibly natural and responsive handwriting experience. Using fingers, styluses, or both, multiple users can simultaneously write or draw on the huge 75" ViewBoard panel. What's more, meetings and presentations start fast thanks to convenient one-wire USB-C connectivity.

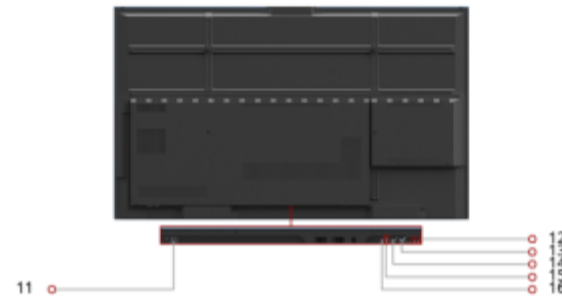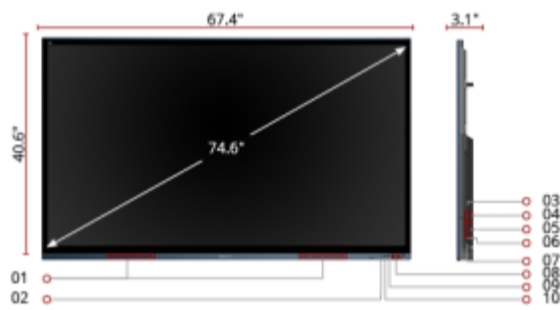

- |                               |                     |                     |                  |              |                                     |
|-------------------------------|---------------------|---------------------|------------------|--------------|-------------------------------------|
| 1. Internal Speakers 12W (x2) | 4. USB 3.0 (x3)     | 7. USB 2.0          | 10. HDMI 2.0 In  | 13. VGA      | 15. Ethernet Lan (RJ45) In/Out (x2) |
| 2. USB Type-C                 | 5. HDMI 2.0 In (x3) | 8. USB 3.0 (x2)     | 11. AC In        | 14. RS232 In | 16. SPDIF Out                       |
| 3. HDMI 4K Out                | 6. USB B Touch Port | 9. USB B Touch Port | 12. Audio In/Out |              |                                     |

**Contact Sales**

- call: 888.881.8781
- email: [salesinfo@viewsonic.com](mailto:salesinfo@viewsonic.com)
- visit: [viewsonic.com](http://viewsonic.com)

**Display:**

Display Type:	LCD
Display Size (in.):	75
Viewable Area (in.):	74.5
Light Source:	LED
Resolution:	3840 x 2160
Aspect Ratio:	16:9
Static Contrast Ratio:	5,000:1
Backlight Life (Hours):	30,000
Brightness:	350 cd/m2
Response Time (Typical GTG):	8ms
Viewing Angles:	178° horizontal, 178° vertical
Panel Surface:	Anti-glare 9H tempered glass

**Networking:**

Ethernet LAN:	10/100 Mbps for Embedded Player; 10/100/1000 Mbps for Slot-in
---------------	---

**Embedded Player:**

OS:	Android 8.0
CPU:	ARM Quad Core Cortex A73
CPU Processor Speed:	1.2GHz
Memory:	3GB
Storage:	32GB

**Audio:**

Internal Speakers:	12W (x2)
Subwoofer:	15W (x1)

**Connector:**

HDMI 2.0 In(4), HDMI 4K Out(1), 3.5mm Audio Out(1), SPDIF Audio Out(1), USB 3.0(5), USB 2.0(1), USB 3.1 Type C(1), Slot-in PC Slot(1), USB B Touch Port(1), RS232(1), Ethernet LAN (RJ45)(2), WIFI Module Slot(1)

**Power:**

Voltage:	100-240 VAC
Consumption (max):	490W
Consumption (typical):	130W
Stand-by:	<0.5W

**Operating Conditions:**

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	10-90%

**Touch:**

Touch Technology:	Projective Capacitive
Touch Points:	20-Point Touch
Tip Detection:	Finger or Active Pen

**Weight (imperial):**

Net (lbs):	110.3
Gross (lbs):	146.2

**Weight (metric):**

Net (kg):	50.1
Gross (kg):	66.3

**Dimensions (imperial) (WxHxD):**

Packaging (in.):	72.8 x 44.1 x 10.6
Physical (in.):	67.4 x 40.6 x 3.1

**Dimensions (metric) (WxHxD):**

Packaging (mm):	1848.0 x 1121.0 x 270.0
Physical (mm):	1712.0 x 1031.0 x 78.0

**Mount:**

VESA Compatible:	800 x 400 mm
------------------	--------------

**General:**

Warranty: 3-year limited warranty on parts, labor and backlight, onsite warranty

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

PACKAGE CONTENTS: IFP7562 display, power cable, HDMI cable, USB cable Type C, USB Cable for Touch, Passive Stylus x 2, RS232 Adapter, Clamp x 5, remote control with batteries, Camera plate, screw x 8, Quick Start Guide

Regulations: CTUVus, FCC, Energy 8.0, EPEAT, Mexico, CE, CB, ErP, REACH, UKCA

UPC: 766907012071

**Accessories:**

VB-STND-001, VB-STND-002, VB-STND-003, VB-STND-004, VB-STND-005, VPC25-W53-O1, VPC25-W53-O1-1B, VPC25-W53-O2, VPC25-W53-O2-1B, VPC27-W55-O2, VPC27-W55-O2-1B, VPC2C-W33-O1, VPC2C-W33-O1-1B, WMK-047-2