

Key Features


5500 Lumen Brightness | Ultra-high Contrast Ratio | Long-lasting Laser
Phosphor Light Source | One-wire HDBT Input | 360-degree Orientation



Product Description


Bright and versatile for any professional installation, the ViewSonic® LS800WU WUXGA laser projector delivers everything you need for big screens in big venues. Delivering 5,500 lumens of advanced high brightness, 100,000:1 contrast ratio, and up to 30,000 hours* of light source life, this projector is ideal for auditoriums, lecture halls, large boardrooms, houses of worship, and more. Thanks to SuperColor™ technology, content is brought to life with captivating color, crisp graphics, and stunning videos no matter the environment. This top-notch performer is also easy to deploy and manage with its wide 1.65x optical zoom adjustment, vertical/horizontal keystone, 4 corner adjustment, and a vertical/horizontal lens shift feature that provide extreme flexibility in even the most challenging installations. Thanks to the built-in HDBT receiver, the projector is capable of receiving uncompressed HD video and audio from over 200 feet away via network cable. Moreover, 360-degree tilt angle projection, portrait mode, and 24/7 operation allow for extreme mounting flexibility. The ViewSonic® LS800WU is the ideal WUXGA laser projector for professional installations, large venues, and business and education environments.

*Light source life may vary based on actual usage and other factors.

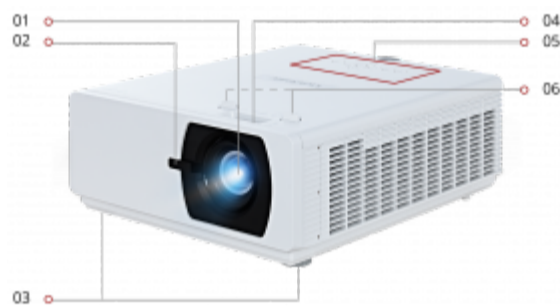


01 Projection Lens
02 IR Remote Sensor
03 Elevation Feet
Zoom
Menu Controls
Lens Shift

04 VGA In
05 HDMI (x3)
06 LAN
AC In
HDBT
RS232

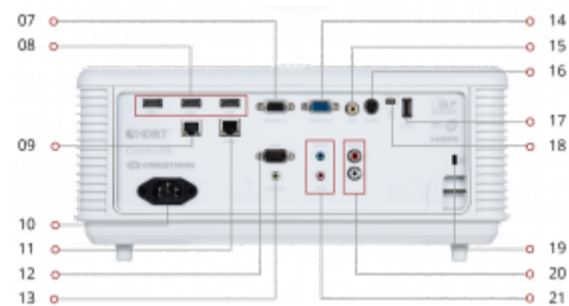

07 Audio Out
08 Monitor Out
09 Video
10 3D Sync
11 USB 2.0 Type A
12 USB Mini B


13 Kensington Lock Slot
14 Audio In (R/L)
15 Audio In / Mic In



1920 x 1200
RESOLUTION



5,500 ANSI
LUMENS



1.2 - 1.9
THROW RATIO

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

| | |
|--|---|
| Type: | DLP Laser |
| Resolution Type: | WUXGA (1920x1200) |
| Resolution: | 1920 x 1200 |
| Brightness (Lumens): | 5,500 ANSI |
| Display Size (in.): | 30 - 300 in. / 0.76 - 7.62 m |
| Throw Distance: | 4.1 - 41 ft / 1.3 - 12.5 m |
| Throw Ratio: | 1.2 - 1.9 |
| Keystone: | Vertical (± 25°) / Horizontal (± 30°) |
| Lens: | 1.65x optical zoom |
| Light Source (watt): | Laser bank x 4 |
| Light Source Life, Normal (hours): | 20000 |
| Light Source Life, Dynamic Eco-Mode (hours): | 30000 |
| Color Depth: | 1.07B Color (R/G/B 10bit) |
| Dynamic Contrast Ratio: | 100,000:1 |
| Aspect Ratio: | 16:10 |
| Lens Shift: | Horizontal (-2.5% +2.5%) / Vertical (-2.4% +9.2%) |
| Operation Rating: | 24/7 |

Video Signal:

| | |
|-----------------------|------------|
| Frequency Horizontal: | 15K~102KHz |
| Frequency Vertical: | 23~120Hz |

Compatibility:

| | |
|------------------------|-------------|
| PC Resolution (max): | 1920 x 1200 |
| PC Resolution (min): | 640 x 480 |
| Mac® Resolution (max): | 1920 x 1200 |
| Mac® Resolution (min): | 640 x 480 |

Connector:

USB 2.0 Type A(1), Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI(3), VGA In(1), VGA Out(1), Composite RCA Video In(1), Mini USB(1), RCA Audio In (L/R)(1), RCA Audio Out(1), 3D VESA(1), HDBT(1)

Audio:

| | |
|--------------------|---------|
| Internal Speakers: | 5W (x2) |
|--------------------|---------|

Power:

| | |
|------------------------|-----------------------------|
| Voltage: | 100-240V+/- 10%, 50/60Hz AC |
| Consumption (typical): | 430W |
| Stand-by: | <0.5W |

Controls:

| | |
|--------------------|--|
| Physical Controls: | Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality) |
| On Screen Display: | Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source |

Operating Conditions:

| | |
|----------------------------|-----------------------|
| Temperature: | 32-104° F (0 - 40° C) |
| Humidity (non-condensing): | 0-90% |
| IP Code: | IP6X |

Additional Hardware:

| | |
|-----------------------|---|
| Kensington Lock Slot: | 1 |
|-----------------------|---|

Weight (imperial):

| | |
|--------------|------|
| Net (lbs): | 24.3 |
| Gross (lbs): | 30.0 |

Weight (metric):

| | |
|-------------|------|
| Net (kg): | 11.0 |
| Gross (kg): | 13.6 |

Dimensions (imperial) (WxHxD):

| | |
|------------------|--------------------|
| Packaging (in.): | 22.0 x 11.9 x 18.5 |
| Physical (in.): | 14.2 x 6.3 x 17.3 |

Dimensions (metric) (WxHxD):

| | |
|-----------------|-----------------------|
| Packaging (mm): | 559.0 x 301.0 x 469.0 |
| Physical (mm): | 360.0 x 161.0 x 440.0 |

General:

AV Control: AMX Certified, ATEN Certified, Crestron Certified

Regulations: FCC, UL/CUL, ROHS

PACKAGE CONTENTS: LS800WU projector, power cable, VGA cable, remote control, Quick Start Guide

Warranty: Five-year limited warranty on parts and labor, 1-year limited warranty on the light source, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907932218

Accessories:

PGD-350, PJ-SCW-1001W, PJ-WMK-006, PM-FCP, VC10, VCB10