

Key Features

SuperColor: Amazing Color Accuracy | 4000 Lumen Brightness | Energy

Efficient SuperEco | Network Capable | Reduced Input Latency




Product Description

The ViewSonic® PG703X projector features 4,000 lumens, XGA 1024x768 native resolution, an intuitive, user-friendly design, and a sleek white chassis. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment. An energy-saving SuperEco™ feature reduces power consumption and extends the lamp life by up to 15,000 hours. A 10W speaker delivers incredibly clear and audible sound, while a top lamp door enables easy access for lamp maintenance. The PG703X is the ideal high brightness projector for use in both classroom and corporate settings.



01 Projection lens
IR remote sensor
Elevation foot
Focus / zoom rings
USB type Mini B
HDMI x2 (x1 MHL)

02 Audio In/Out
VGA
AC In
Control Panel
Monitor Out
Kensington® Lock Slot

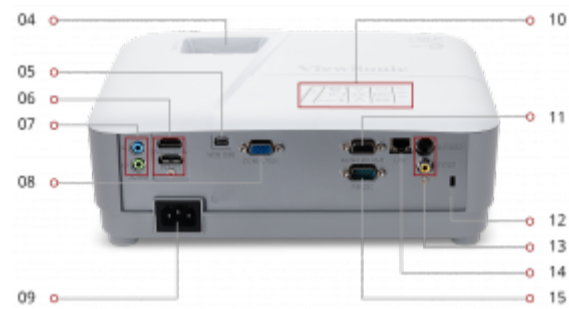


04 Video/S-Video In
LAN (RJ45)
RS232



1024 x 768
RESOLUTION



4,000 ANSI
LUMENS



1.96~2.15
THROW RATIO

Contact Sales

-  call: 888.881.8781
-  email: salesinfo@viewsonic.com
-  visit: viewsonic.com

Display:

Type:	DLP Lamp
Resolution Type:	XGA (1024x768)
Resolution:	1024 x 768
Brightness (Lumens):	4,000 ANSI
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Throw Distance:	3.90 - 43.01 ft / 1.19 - 13.11 m
Throw Ratio:	1.96~2.15
Keystone:	Vertical (± 40°)
Lens:	1.1x optical zoom
Light Source (watt):	240
Light Source Life, Normal (hours):	4000
Light Source Life, Dynamic Eco-Mode (hours):	15000
Color Depth:	1.07B Color (R/G/B 10bit)
Dynamic Contrast Ratio:	22,000:1
Aspect Ratio:	16:10

Video Signal:

Frequency Horizontal:	15k~102kHz
Frequency Vertical:	23~120Hz

Compatibility:

PC Resolution (max):	1920 x 1080
Mac® Resolution (max):	1920 x 1080

Connector:

Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI(1), HDMI MHL(1), VGA In(1), VGA Out(1), Composite RCA Video In(1), S-Video In(1), Mini USB(1)

Audio:

Internal Speakers:	10W (x1)
--------------------	----------

Power:

Voltage:	100-240 VAC, 50-60Hz
Consumption (typical):	350W
Stand-by:	<0.5W

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
--------------	-----------------------

Weight (imperial):

Net (lbs):	5.3
Gross (lbs):	7.5

Weight (metric):

Net (kg):	2.4
Gross (kg):	3.4

Dimensions (imperial) (WxHxD):

Packaging (in.):	14.37 x 11.81 x 7.4
Physical (in.):	11.57 x 8.58 x 4.33

Dimensions (metric) (WxHxD):

Packaging (mm):	365 x 300 x 188
Physical (mm):	294 x 218 x 110

General:

AV Control: AMX Certified, ATEN Certified, Crestron Certified, Extron Certified, PJ Link Certified
 Regulations: FCC (including ICES003), cTUVus
 PACKAGE CONTENTS: PG703X projector, power cable, VGA cable, remote control, Quick Start Guide
 Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).
 Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.
 UPC: 766907916218

Accessories:

PGD-350, PJ-CASE-008, PJ-SCW-1001W, PJ-WMK-006, PM-FCP, PRJ-EE-07-03, PRJ-EEEW-07-01, PRJ-EEEW-07-02, PRJ-EW-07-01, PRJ-EW-07-02, RLC-113, RLC-114, VC10

Copyright © ViewSonic Corporation 2000-2019. All rights reserved. (03/21/2019 01:14 PM PST)

Select your preferred Country/Region: 