

Key Features



SuperColor: Amazing Color Accuracy | 4,000 Lumen Brightness |

Network Capable | Energy-efficient SuperEco™



Product Description


The ViewSonic® PG705WU projector features 4,000 lumens, 1920x1200 native resolution, an intuitive, user-friendly design, and a sleek white chassis. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment. Equipped with Crestron® LAN controller, this projector makes it easy for IT admin to remotely control and manage multiple projectors from their workstations. With a shorter throw ratio, 1.2x optical zoom, vertical keystone, and extensive connectivity, the PG705WU provides flexible and quick set-up. What's more, an energy-saving SuperEco™ feature reduces power consumption and extends the lamp life by up to 15,000 hours. The PG705WU is the ideal projector for both high definition presentations and vibrant multimedia entertainment.

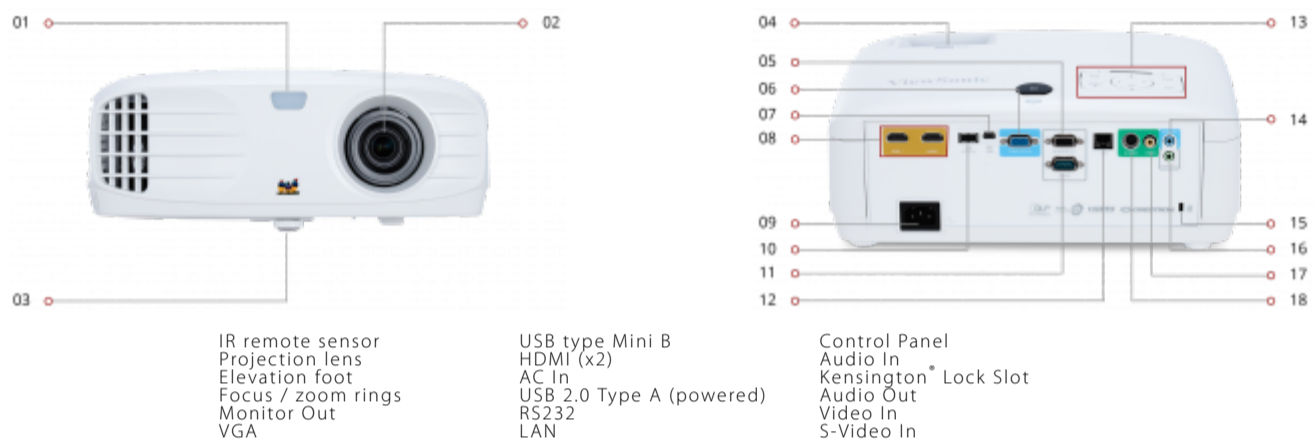

1920 x 1200
RESOLUTION



4,000 ANSI
LUMENS



1.49-1.76
THROW RATIO

Contact Sales

-  call: 888.881.8781
-  email: salesinfo@viewsonic.com
-  visit: viewsonic.com

Select your preferred Country/Region: 

Display:

Type:	DLP Lamp
Resolution Type:	WUXGA (1920x1200)
Resolution:	1920 x 1200
Brightness (Lumens):	4,000 ANSI
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Throw Distance:	3.1 - 37.3 ft / 1 - 11.4 m
Throw Ratio:	1.49-1.76
Keystone:	Vertical (± 40°)
Lens:	1.2x Manual optical zoom / manual optical focus
Light Source (watt):	240
Light Source Life, Normal (hours):	4000
Light Source Life, Dynamic Eco-Mode (hours):	15000
Color Depth:	1.07B Color (R/G/B 10bit)
Dynamic Contrast Ratio:	12,000:1
Aspect Ratio:	16:10

Video Signal:

Frequency Horizontal:	15k~102kHz
Frequency Vertical:	23~120Hz

Compatibility:

PC Resolution (max):	1920 x 1200
PC Resolution (min):	640 x 480
Mac® Resolution (max):	1920 x 1200
Mac® Resolution (min):	640 x 480

Connector:

USB 2.0 Type A(1), Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI(2), VGA In(1), VGA Out(1), Composite RCA Video In(1), S-Video In(1), Mini USB(1)

Audio:

Internal Speakers:	10W (x1)
--------------------	----------

Power:

Voltage:	100-240V+/- 10%, 50/60Hz AC
Consumption (typical):	350W
Stand-by:	<0.5W

Controls:

Physical Controls:	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	0-90%

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Weight (imperial):

Net (lbs):	8.1
Gross (lbs):	11.0

Weight (metric):

Net (kg):	3.7
Gross (kg):	5.0

Dimensions (imperial) (WxHxD):

Packaging (in.):	16.4 x 8.2 x 13.2
Physical (in.):	13.1 x 5.3 x 10.3

Dimensions (metric) (WxHxD):

Packaging (mm):	417.0 x 207.0 x 336.0
Physical (mm):	332.0 x 135.0 x 261.0

General:

AV Control: AMX Certified, ATEN Certified, Crestron Certified, Extron Certified, PJ Link Certified

Regulations: FCC, cTUVus

PACKAGE CONTENTS: PG705WU projector, power cable, VGA cable, remote control, Quick Start Guide

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907929713

Accessories:

PGD-350, PJ-SCW-1001W, PJ-WMK-006, PM-FCP, PRJ-EE-07-03, PRJ-EEEW-07-01, PRJ-EEEW-07-02, PRJ-EW-07-01, RLC-117

Copyright © ViewSonic Corporation 2000-2019. All rights reserved. (03/22/2019 07:54 AM PST)

Select your preferred Country/Region: ▼