

Key Features

5,200 lumen brightness | Vertical lens shift with centered lens | Secure MHL/HDMI port, and optional HDBT adapter | 4 HDMI ports for flexible connectivity




Product Description

Delivering 1024 x 768 resolution and 5200 lumens of brightness, the ViewSonic® LightStream® Pro8510L is the ideal XGA projector for professional installations, large venues, and business and education environments. With its 1.6x optical zoom, centered lens, vertical lens shift, and HV keystoneing, the Pro8510L provides extreme flexibility even in the most challenging installations. The Pro8510L boasts a sleek top cover design for quick lamp and accessory access, while an intuitive PortAll® compartment accommodates additional accessories such as an HDBT receiver, wireless streaming device, or PC stick. The cable management hood hides unsightly cables, and a 4-in-1 power button serves as a central point for LED notifications. Moreover, four HDMI ports and additional audio and video ports allow for extensive connectivity to handle multiple devices without the need to switch cables. Powered by SuperColor™ technology for beautiful image reproduction, and SonicExpert™ technology for incredibly clear sound, the Pro8510L delivers a professional audiovisual performance.




01 Cable Management
02 Vertical Lens Shift
03 IR Remote Sensor
04 Projection Lens
05 PortAll™ (HDMI/MHL)
06 Zoom ring

05 Focus ring
06 Monitor Out
07 Power Switch
08 HDMI (x3)
09 LAN
10 Menu Controls

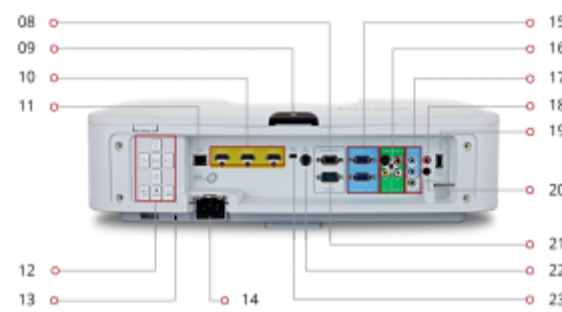

11 Kensington® Lock Slot
12 AC In
13 VGA (x2)
14 Audio/Video In
15 Audio In/Out
16 LAN
17 IR Passthrough


15 USB
16 12V DC Trigger
17 RS232
18 3D VESA
19 USB type Mini B



1024 x 768
RESOLUTION



5,200 ANSI
LUMENS



1.41 ~ 2.25
THROW RATIO

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Type:	DLP Lamp
Resolution Type:	XGA (1024x768)
Resolution:	1024 x 768
Brightness (Lumens):	5,200 ANSI
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Throw Distance:	2.3 – 37.3 ft. / 0.86 – 11.36 m
Throw Ratio:	1.41 ~ 2.25
Keystone:	Vertical (± 30°) / Horizontal (± 30°)
Lens:	1.6x Manual optical zoom / manual optical focus
Light Source (watt):	370
Light Source Life, Normal (hours):	2000
Light Source Life, Dynamic Eco-Mode (hours):	2500
Color Depth:	30 bits, 1.07B Color (10+10+10)
Aspect Ratio:	4:3 (native)

Video Signal:

Frequency Horizontal:	15–100KHz
Frequency Vertical:	24–120Hz

Compatibility:

PC Resolution (max):	Up to 1920x1080
Mac® Resolution (max):	Up to 1920x1080 (may require MAC adapter)

Connector:

USB 2.0 Type A(1), Ethernet LAN (RJ45)(1), 3.5mm 12V Trigger(1), 3.5mm Audio Out(1), 3.5mm Audio In(2), Control (RS-232)(1), HDMI 1.4(3), HDMI MHL(1), VGA In(2), VGA Out(1), Composite RCA Video In(1), S-Video In(1), Mini USB(1), Micro USB(1), RCA Audio In (L/R)(1)

Audio:

Internal Speakers:	10W (x2)
--------------------	----------

Power:

Voltage:	100~240VAC (Auto Switching), 50-60Hz (universal)
Consumption (max):	570W
Stand-by:	<0.5W

Controls:

Physical Controls:	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	0-90%

Noise Level:

Eco-Mode:	33dB
-----------	------

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Weight (imperial):

Net (lbs):	13.89
Gross (lbs):	23.81

Weight (metric):

Net (kg):	6.3
Gross (kg):	10.8

Dimensions (imperial) (WxHxD):

Packaging (in.):	22.72 x 21.14 x 10.24
Physical (in.):	19.55 x 12.45 x 5.5

Dimensions (metric) (WxHxD):

Packaging (mm):	577 x 537 x 260
Physical (mm):	496.5 x 316.2 x 139.8

General:

AV Control: AMX Certified, ATEN Certified, Crestron Certified, Extron Certified, PJ Link Certified

Regulations: Mexico Energy test/Registration, EAC, TUV-S Mark (Argentina), India BIS, FCC, CE, EMC, CB, CCC, RoHS, REACH, SVHC, WEEE, ErP, Mexico NOM, cTUVus, PSB, RCM, CÉCP

PACKAGE CONTENTS: Pro8510L projector, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide), Cable management cover

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907829815

Accessories:

PGD-350, PJ-WMK-006, PRJ-EE-09-03, PRJ-EEEW-09-01, PRJ-EEEW-09-02, PRJ-EW-09-01, PRJ-EW-09-02, VIEWSTICK2, VIEWSTICK2-S, VIEWSYNC3, WPG-300