

## Key Features

Bright Images in Any Environment | Long Lamp Life | Vertical Lens Shift

| Cloud-based Color Profile Exchange | SuperColor: Amazing Color

Accuracy




## Product Description

Ideal for both home entertainment and office use, the ViewSonic® PX701HDH delivers stunning Full HD images for versatile projection. With 3,500 ANSI lumens, this high-brightness projector delivers clear pictures even in brightly lit rooms. What's more, an energy-saving SuperEco™ feature reduces power consumption and extends the lamp life by up to 20,000 hours,\* effectively reducing lamp replacement and maintenance costs. A cloud-based vColorTuner™ feature allows users to customize and save color profiles, while exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment. Dual HDMI inputs and USB power supply delivers flexible connectivity options for gaming, movies, wireless dongles, and more.




- 01. Control Panel
- 02. Elevation Foot
- 03. Zoom Ring

- 04. IR Remote Sensor
- 05. Projection Lens
- 06. USB 2.0 Type A

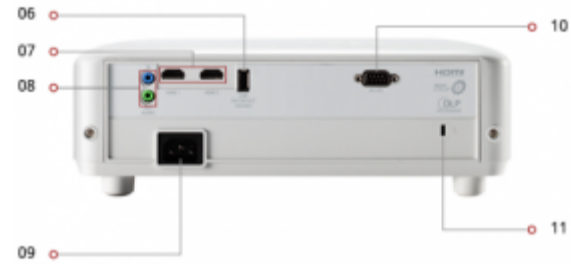

- 07. HDMI (x2)
- 08. Audio In/Out
- 09. AC In


- 10. RS232
- 11. Kensington® Lock Slot



1920 x 1080  
**RESOLUTION**



3,500 ANSI  
**LUMENS**



1.5-1.65  
**THROW RATIO**

### Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Select your preferred Country/Region:



**Display:**

Type:	DLP Lamp
Resolution Type:	Full HD (1920x1080)
Resolution:	1920 x 1080
Brightness (Lumens):	3,500 ANSI
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Throw Distance:	1m~10.96m (100"@3.32m)
Throw Ratio:	1.5-1.65
Keystone:	Vertical (+/- 40°)
Lens:	1.1x optical zoom
Light Source (watt):	203
Light Source Life, Normal (hours):	5000
Light Source Life, Dynamic Eco-Mode (hours):	20000
Color Depth:	1.07 Billion Colors
Dynamic Contrast Ratio:	12,000:1
Aspect Ratio:	16:9

**Video Signal:**

Frequency Horizontal:	15K-102KHz
Frequency Vertical:	23-120Hz

**Compatibility:**

PC Resolution (max):	1920 x 1200
PC Resolution (min):	640 x 480
Mac® Resolution (max):	1920 x 1200
Mac® Resolution (min):	640 x 480

**Connector:**

USB 2.0 Type A(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI 1.4 (with HDCP 1.4)(2)

**Audio:**

Internal Speakers:	10W (x1)
--------------------	----------

**Power:**

Voltage:	100-240V+/- 10%, 50/60Hz AC
Consumption (typical):	300W
Stand-by:	<0.5W

**Controls:**

Physical Controls:	Keypad, Power key
On Screen Display:	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

**Operating Conditions:**

Temperature:	32~95° F (0 - 35° C)
--------------	----------------------

**Additional Hardware:**

Kensington Lock Slot:	1
-----------------------	---

**Weight (imperial):**

Net (lbs):	5.7
Gross (lbs):	8.3

**Weight (metric):**

Net (kg):	2.6
Gross (kg):	3.8

**Dimensions (imperial) (WxHxD):**

Packaging (in.):	16.3 x 6.6 x 11.7
Physical (in.):	12.2 x 4.4 x 8.7

**Dimensions (metric) (WxHxD):**

Packaging (mm):	415.0 x 168.0 x 297.0
Physical (mm):	312.0 x 108.0 x 222.0

**General:**

Regulations: cTUVus

PACKAGE CONTENTS: PX701HDH projector, power cable, remote control, Quick Start Guide

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907016758

**Accessories:**

HB10B, PJ-CASE-008, PJ-SCW-1001W, PJ-WMK-006, RLC-119, VCB10, VSR100

