



Key Features

5,200 Lumen Brightness | Vertical/Horizontal Lens Shift with Centered Lens | Stackable Design | 360-degree Installation | SuperColor: Amazing Color Accuracy



Product Description


Bright and versatile for any professional installation, the ViewSonic® Pro9520WL WXGA projector delivers everything you need for big screens in big venues. Delivering 5,200 lumens of advanced high brightness, this projector is ideal for auditoriums, large boardrooms, houses of worship, and more. Thanks to SuperColor™ technology, content is brought to life with captivating color, crisp graphics, and stunning videos no matter the environment. Designed for installers, this top-notch performer is also easy to deploy and manage with its wide 1.7x optical zoom adjustment, a centered lens design, and a vertical/horizontal lens shift feature that provides extreme flexibility in even the most challenging installations. Thanks to the stackable design of these projectors, light output can be doubled by simply placing one projector on top of the other - perfect for large venues with high ambient light.

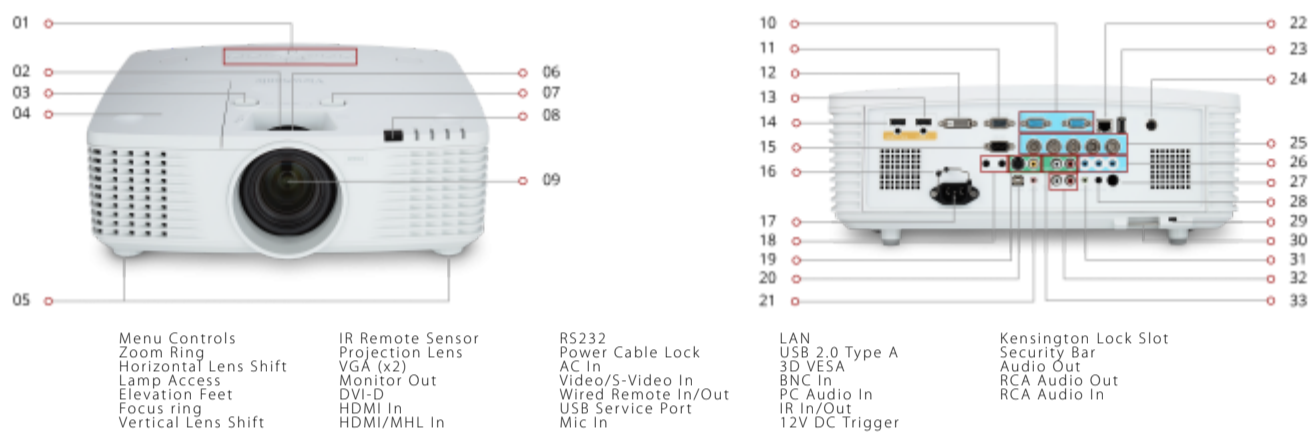

1280 x 800
RESOLUTION



5,200 ANSI
LUMENS



1.32 - 2.24:1
THROW RATIO

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Type:	DLP Lamp
Resolution Type:	WXGA (1280x800)
Resolution:	1280 x 800
Brightness (Lumens):	5,200 ANSI
Display Size (in.):	20.7 - 351.7 in. / 0.53 - 8.9m
Throw Distance:	3.3 - 55.8 ft / 1 - 17m
Throw Ratio:	1.32 - 2.24:1
Keystone:	Vertical (± 30°) / Horizontal (± 25°)
Lens:	1.7x Manual optical zoom / manual optical focus
Light Source (watt):	370
Light Source Life, Normal (hours):	1500
Light Source Life, Dynamic Eco-Mode (hours):	3500
Color Depth:	30 bits, 1.07B Color (10+10+10)
Dynamic Contrast Ratio:	8,000:1
Aspect Ratio:	16:10
Lens Shift:	Vertical (-12.7%/+23.7%) / Horizontal (+/- 10.9%)

Video Signal:

Frequency Horizontal:	15-100kHz
Frequency Vertical:	24-120Hz

Compatibility:

PC Resolution (max):	Up to 1920x1080
Mac® Resolution (max):	Up to 1920x1080

Connector:

USB 2.0 Type A(1), USB 2.0 Type B(1), Ethernet LAN (RJ45)(1), 3.5mm 12V Trigger(1), 3.5mm Audio Out(1), 3.5mm Audio In(3), Control (RS232)(1), HDMI 1.4(1), HDMI MHL(1), DVI-D(1), VGA In(2), VGA Out(1), Composite RCA Video In(1), S-Video In(1), RCA Audio In (L/R)(1), RCA Audio Out(1), 3D VESA(1), Wired Remote In(1), Wired Remote Out(1), 5-BNC(1)

Audio:

Internal Speakers:	7W (x2)
--------------------	---------

Power:

Voltage:	100~240VAC (Auto Switching), 50-60Hz (universal)
Consumption (max):	480W
Stand-by:	<0.5W

Controls:

Physical Controls:	Power, H/V lens shift, focus, zoom, keystone/arrow keys, left/blank, right/panel key lock, menu/exit, mode/enter, source
On Screen Display:	Display, Image, Video, Audio, Basic, Advanced

Operating Conditions:

Temperature:	41-104° F (5 - 40° C)
Humidity (non-condensing):	10-85%

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Weight (imperial):

Net (lbs):	18.26
Gross (lbs):	27.31

Weight (metric):

Net (kg):	8.29
Gross (kg):	12.4

Dimensions (imperial) (WxHxD):

Packaging (in.):	22.7 x 11.5 x 17.2
Physical (in.):	17.5 x 5.8 x 12.8

Dimensions (metric) (WxHxD):

Packaging (mm):	576 x 291 x 436
Physical (mm):	445 x 147.8 x 325.5

General:

AV Control: AMX Certified, Crestron Certified

Regulations: UL, cUL, FCC, CE, EMC, CB, ROHS, REACH, SVCH, WEEE, ErP, Mexico NOM/ENERGY, PSB, RCM, CCC

PACKAGE CONTENTS: Pro9520WL projector, power cable, VGA cable, laser remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907848014

Accessories:

HB10B, PJ-WMK-006, PRJ-EE-09-03, PRJ-EEEW-09-01, PRJ-EEEW-09-02, PRJ-EW-09-01, PRJ-EW-09-02, RLC-106, VIEWSTICK2, VIEWSYNC3