



Key Features

SuperClear MVA Panel Technology | High-definition Daisy Chain
 Capability | Versatile Connectivity | Ergonomic Design | Optimized View
 Settings



Product Description

With future-proof connectivity and advanced ergonomics, the ViewSonic® VG2249 is a productivity-boosting monitor perfect for corporate, government, and education environments. Designed with both a DisplayPort input and output, this monitor delivers easy, single-cable daisy-chaining of multiple monitors for increased productivity. With SuperClear® MVA panel technology for wide-angle viewing, and a 20M:1 dynamic contrast ratio, incredibly sharp images and vivid color remain consistent across multiple daisy-chained screens. For maximum comfort and a customized fit, a robust fully ergonomic stand gives you tilt, pivot, swivel, and height-adjustable options. Additional connectivity options include VGA, HDMI, and Mini DisplayPort so that you can connect to a variety of high-definition and analog devices – today and tomorrow.

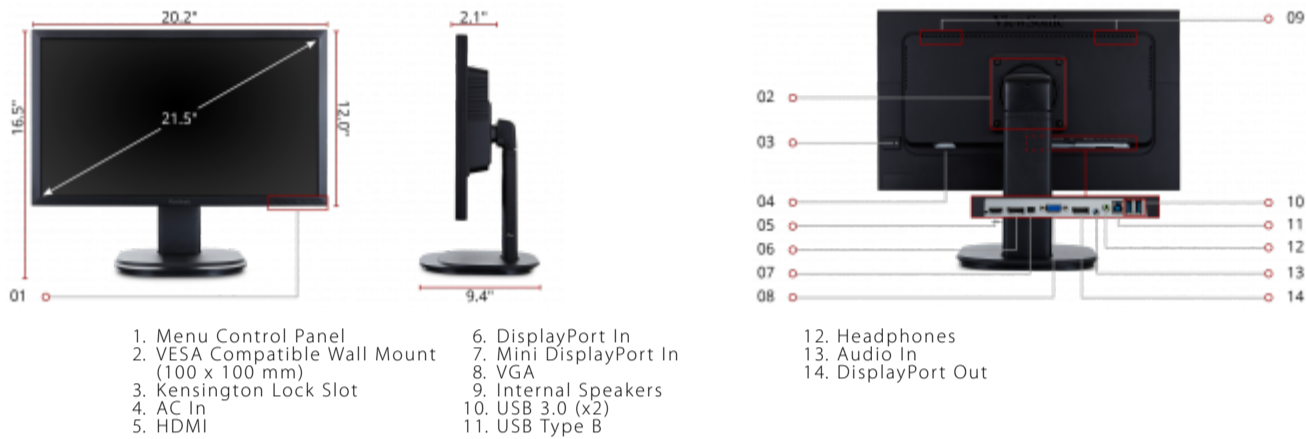

Contact Sales

-  call: 888.881.8781
-  email: salesinfo@viewsonic.com
-  visit: viewsonic.com

Display:

Display Size (in.):	22
Viewable Area (in.):	21.5
Panel Type:	MVA
Resolution:	1920 x 1080
Static Contrast Ratio:	3,000:1
Dynamic Contrast Ratio:	20M:1
Light Source:	LED
Brightness:	250 cd/m2
Colors:	16.7M
Aspect Ratio:	16:9
Response Time (Typical GTG):	7ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	40,000
Panel Surface:	Anti-glare, Hard coating (3H)

Compatibility:

PC Resolution (max):	1920 x 1080
----------------------	-------------

Connector:

USB 3.0 Type A(2), USB 3.0 Type B(1), VGA(1), HDMI 1.4 In(1), Display Port(1), Display Port Out(1), Mini Display Port(1)

Audio:

Internal Speakers:	2W (x2)
--------------------	---------

Power:

Eco Mode (Conserve):	12W
Eco Mode (optimized):	14W
Consumption (typical):	18W
Consumption (max):	44W
Voltage:	AC 100-240V (universal), 50-60Hz
Stand-by:	.5W

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Controls:

Physical Controls:	1,2, Up, Down, Power
On Screen Display:	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Advanced Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	20-90%

Mount:

VESA Compatible:	100 x 100 mm
------------------	--------------

Video Signal:

Frequency Horizontal:	Analog: 24 ~ 82KHz. Digital: 15 ~ 82KHz
Frequency Vertical:	50 ~ 75Hz

Video Input:

Analog Sync:	Separate Sync / Composite Sync / Sync on Green
Digital Sync:	TMDS, PCI-E

Ergonomics:

Height Adjust:	135 mm / 5.3 in
Swivel:	360°
Pivot (Right/Left):	90° / 0°
Tilt (Forward/Back):	6° / 25°

Weight (imperial):

Net (lbs):	10
Net Without Stand (lbs):	6.7
Gross (lbs):	13.5

Weight (metric):

Net (kg):	4.5
Net Without Stand (kg):	3.0
Gross (kg):	6.1

Dimensions (imperial) (WxHxD):

Packaging (in.):	22.8 x 19 x 7.1
Physical (in.):	20.2 x 16.5 x 9.4
Physical Without Stand (in.):	20.2 x 12 x 2.1

Dimensions (metric) (WxHxD):

Packaging (mm):	578 x 482 x 180
Physical (mm):	512.4 x 418.0 x 239.6
Physical Without Stand (mm):	512.4 x 304.4 x 54.2

General:

Regulations: cULus, FCC, ICES003, Energy Star 7.0, EPEAT, UL-MX-CoC, Mexico Energy, RoHS Green BOM & RoHS DoC

PACKAGE CONTENTS: VG2249 Display, Power Cable, Mini DP to DP Cable, USB 3.0 Upstream Cable, Quick Start Guide, ViewSonic Wizard CD-ROM

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

Warranty: Three-year limited warranty on parts, labor and backlight

UPC: 766907853414

Accessories:

CB-00008948, CB-00010555, CB-00010684, CB-00010958, LCD-CABLE-001, LCD-EE-22-03, LCD-EEEW-22-01, LCD-EEEW-22-02, LCD-EW-22-01, LCD-EW-22-02, LCD-EW-22-03, LCD-WMK-001, VSPF2150, cb-00011486

Awards: