


## Cartridge Range

The **WS140-A** works with **W140** blade cartridges. Find the model that best suits your soldering needs on [www.jbctools.com](http://www.jbctools.com).


Cartridge Ref.	Tip Hole $\varnothing$ mm / in	AWG Solid	AWG Stranded
W14040G	0,08 / 0,0031	40	x
W14038G	0,10 / 0,0039	38	x
W14037G	0,11 / 0,0043	37	x
W14036G	0,13 / 0,0051	36	x
W14034G	0,16 / 0,0063	34	36 (7x44)
W14032G	0,20 / 0,0079	32	34 (7x42)
W14030G	0,25 / 0,0098	30	32 (19x44)
W14028G	0,32 / 0,0126	28	30 (7x38)
			30 (19x42)
W14026G	0,40 / 0,0157	26	28 (19x40)
			27 (7x35)
W14024G	0,51 / 0,0201	24	26 (19x38)
			26 (19x38)

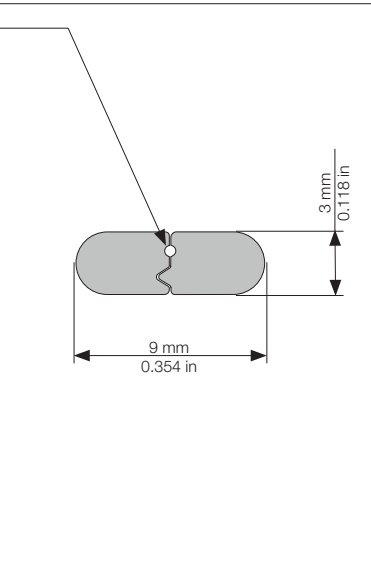

Cartridge Ref.	Tip Hole $\varnothing$ mm / in	AWG Solid	AWG Stranded
W14022G	0,64 / 0,0252	22	24 (19x36)
			24 (7x32)
W14020G	0,81 / 0,0319	20	22 (19x34)
W14018G	1,02 / 0,0402	18	20 (42x36)
			20 (19x32)
			20 (7x28)



Cartridge Ref.	Tip mm / in
W14003F	Flat Tip 3 / 0.118

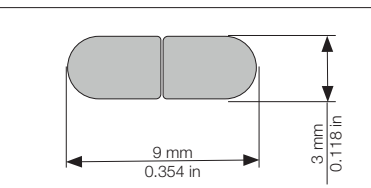

<b>Cartridge Ref.</b>	<b>Tip Hole ø</b> mm / in	<b>AWG Solid</b>	<b>AWG Stranded</b>	
W14016G	1,29 / 0,0508	16	18 (19x30)	
W14014G	1,63 / 0,0642	14	16 (7x24)	

<b>Cartridge Ref.</b>	<b>Tip</b> mm / in	
W14005F	Flat Tip 5 / 0.197	

If an application require a special tip design, contact JBC on [customtips@jbctools.com](mailto:customtips@jbctools.com) for special blade cartridges.