


WX2

2-Channel Power Unit, 200 W (255 W)
Product no.: WX2N

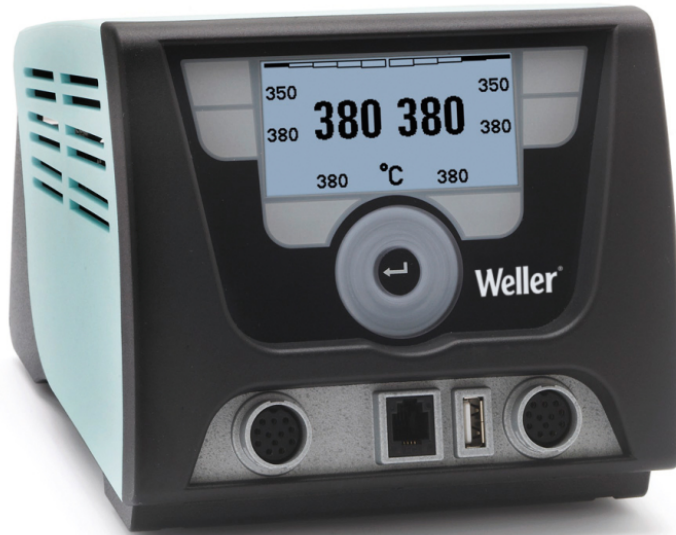

Benefits

- › High Powered Dual Port Digital Power Unit, 120V / 240 W
- › Compatible with all WX series soldering pencils
- › Compatible with WXMT-MS desoldering tweezers
- › Capacitive glass touch screen is chemical and temperature resistant
- › Turn and click wheel with enter key and finger guide is intuitive to use
- › Multi-language menu navigation
- › Large graphic LCD display can be viewed from all angles
- › Versatile connectivity options - preheaters and fume extraction systems
- › Multi-purpose USB port for parameter configuration and DATA LOGGING.
- › Ready for automation using RS232 Serial I/O commands.


For this purpose, we recommend:



Solder fume extractors



Soldering irons



Cleaning



Pre-heating plates



Technical Data

Dimensions L x W x H (mm)	174 x 154 x 135
Dimensions L x W x H (inches)	6,85 x 6,06 x 5,31
Weight (approx.) in kg	3.45
Voltage	120 V
Power	200 W (255 W)
Channels	2
Temperature range (depends on tool) °C	100 - 550
Temperature range (depends on tool) °F	210 - 999
Temperature accuracy °C	±9
Temperature accuracy °F	±17
Temperature stability °C	±2
Temperature stability °F	±4
Equipotential bonding socket	Via 3,5 mm pawl socket on back of device
Display	255 x 128 dots / Backlighting
Air consumption l/min	---
Operating pressure in bar/psi	---
Capacity l/min	---
Vacuum	---

Owning the bench



PROFESSIONAL



FILTRATION



EREM



XCELITE