

XT560B Digital Milliohmmeter

The XT560B Digital Milliohmmeter is ideal for reliable, accurate, low-resistance measurements using the standard 4-wire Kelvin technique.



The XT560B Digital Milliohmmeter is a dedicated, fully automatic instrument that selects the optimal test current, from 100nA to 100mA DC to accurately measure resistances from $10\mu\Omega$ to $33M\Omega$. The XT560B will auto range between 9 ranges, or can be manually set to a fixed range. The XT560B includes a set of Kelvin test clip leads for making four-terminal measurements. The XT560B is ideal for measuring wiring or cable resistances, windings of motors or generators, lamp filaments, cable splices, wire-to-terminal resistances, heating elements, contact resistance of breakers or switches, connector quality/resistance, fuse resistances, transformers, and grounding connections.

- > Maximum Display of 33000
- > Wide Measurement Range: From $10\mu\Omega$ resolution to $30M\Omega$ full scale
- > High Accuracy ±0.02% (most ranges)
- > Auto/Manual Function
- > RS-232 Interface Standard
- > Measurement Speed 10 samples/sec.
- > HOLD, REL Function

- > Physical Power input: 90VAC to 260VAC, 50/60 Hz
- > Size: 8.9cm x 24.7cm x 28.0cm (HxWxD)
- > Weight: 2.27 kg (5.0lbs) Operating range: 0°C to 50°C, <80% RH non-condensing</p>
- > Storage range: -20°C to 70°C non condensing
- > Unit is supplied with one set of Kelvin test leads for 4-terminal measurements
- > Warranty: One year

25 Years Industry EXPERTISE

INDUSTRIES SERVED

- Automated Production Testing Engineering Labs General R&D HVAC
- Motor Manufacturers
 Instrument Maintenance & Repair
- Product Compliance Testing Test Labs


Quality and Reliability

Vitrek, founded in 1990, is the premier source of precision power testing and measuring equipment for industrial and consumer product development and manufacturing. Vitrek's sophisticated technology provides companies the edge in design verification and product manufacturability.



Four-Wire Measurement

The XT560B makes 4-wire resistance measurements as shown in the figure below. The source HI and LO leads apply a known, internal current source to the unknown resistance. The sense HI and LO leads measure the voltage across the unknown resistance.

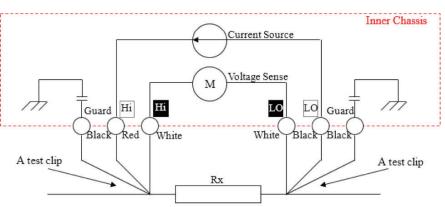

#	
XT560B	Digital Milliohmmeter
CA-560	Kelvin Test Leads, 18in
CA-560-48	Kelvin Test Leads, 48in



Vitrek 12169 Kirkham Road Poway, CA 92164 (858) 689-2755 info@vitrek.com www.vitrek.com



Please visit www.vitrek.com for ordering information.