

## PORCELAIN STEEL WHITEBOARD

with Deluxe Aluminum Trim




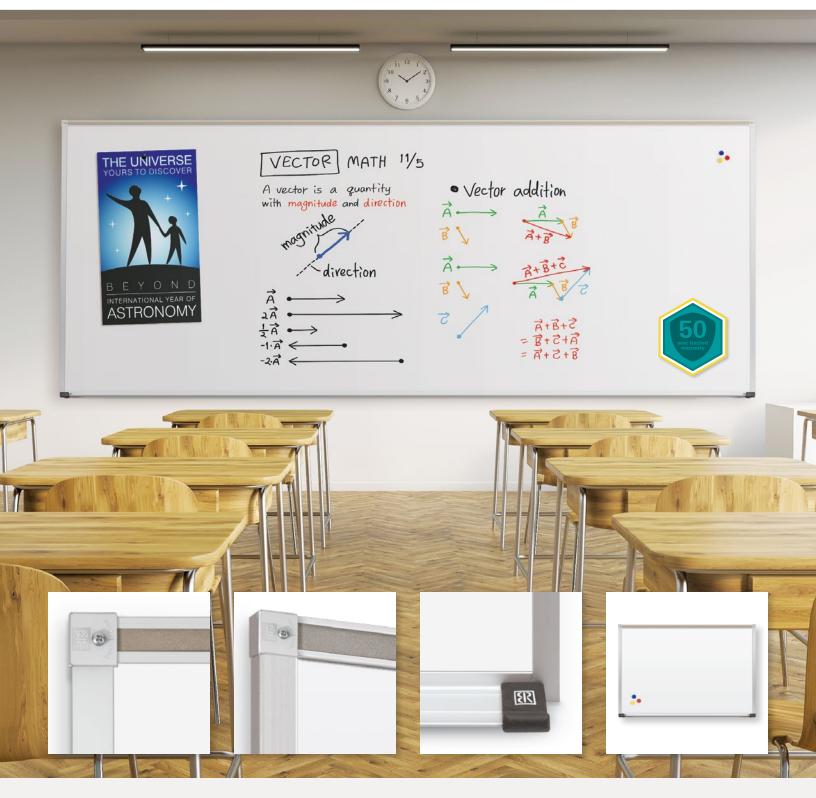



Tried and true porcelain steel provides exceptional writability and erasability.



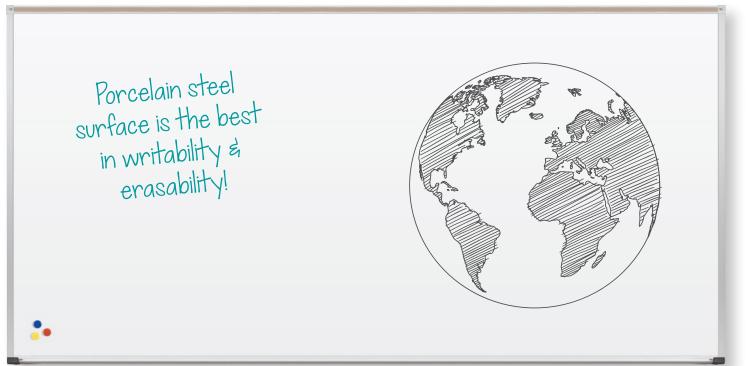





## PORCELAIN STEEL WHITEBOARD - DELUXE ALUMINUM TRIM

- The Board of Education®. Tried and true porcelain steel provides exceptional writability, erasability, and versatility.
- Magnetic porcelain steel whiteboards are engineered for superior color contrast with dry erase markers. Standard gloss dry erase surface provides superior writability and erasability with no ghosting.
- Reduced surface light distortion enhances visibility to provide optimum eye comfort. Steel is permanently
  laminated to a lightweight substrate for stability and durability.
- Anodized aluminum trim has a %" profile with hairline mitered corners. Includes a full-length tackable map
  rail with a colored cork insert, and a full-length accessory tray with rubber Dura-Safe® end caps to eliminate
  sharp edges.
- · Fifty year limited warranty. SCS Indoor Advantage Gold Certified

DIMENSIONS

2'H x 3'W

3'H x 4'W

4'H x 4'W

4'H x 5'W

4'H x 6'W

SHIP WT.	PART NO.	DIMENSIONS	SHIP WT.
	PRODUCT		
20 lbs	202AH	4'H x 8'W	120 lbs
36 lbs	202AK	4'H × 10'W	146 lbs
69 lbs	202AM	4'H x 12'W	194 lbs
84 lbs	202AP	4'H × 16'W	243 lbs
94 lbs			

Shipping weights are listed on a per item basis and may vary based on quantities ordered. All boards listed as 3'H x 4'W actually measure 33.8'H x 48'W due to shipping restrictions. \*Ships UPS.

\*\*Ships UPS with large package surcharge or additional handling fee.

PART NO.

PRODUCT 202AB\*

202AC\*\*

202AD

202AF

202AG



## MOORECO INC.

2885 Lorraine Avenue | Temple, TX 76501 p: 800.749.2258 | f: 866.888.7483 moorecoinc.com



Deluxe aluminum trim features a full-length tackable maprail and a full-length accessory tray with rubber Dura-Safe® end caps to eliminate sharp edges.

## PORCELAIN STEEL TECHNICAL INFORMATION

- A precisely balanced porcelain enamel ground coat is furnace-fused to both sides of 28 gauge (standard) or 24 gauge (custom) steel.
- The first furnace fuses a ground coat of enamel that is heat-softened at approximately 1450° F. The second furnace firing fuses a coat of enamel to the ground coat enamel.
- Color Fusion ceramic top coat is applied providing the desired surface color. Offwhite is standard.
- A fade resistant waterproof resin glue bonds the porcelain to a moisture-resistant core and .005<sup>°</sup> polyester foil backer sheet. Also available with upgraded sheet aluminum backer.