

Lite-Ex[®] PL 30e

UPDATE OF
THE BESTSELLER

SURPASSES ALL LED FLASHLIGHTS ON THE MARKET.

The Lite-Ex[®] PL 30e flashlight from ecom surpasses all other LED flashlights on the market.

The integrated 3 Watt LED, which is powered by 3 LR14 batteries, allows work to be conducted with extremely bright light for hours at a time.

In the new generation, a special reflector enables the illumination of larger surfaces.

The ergonomically designed, anti-static plastic housing ensures the flashlight fits perfectly in your hand and also provides excellent anti-slip protection.

The high IP65 protection rating prevents the permeation of dust and jet water. Use in harsh conditions is therefore not a problem.









SIMPLE AND RELIABLE TWIST MECHANISM

The switch-on mechanism is yet another outstanding feature - the flashlight is switched on via a sturdy rotating ring. This eliminates annoying malfunctions and repairs due to a faulty switch, thereby saving the user both time and money.

FEATURES


- Zone 0 / 20
- 1x high performance LED (3 Watt)
- 204 Lumen
- Ring switch
- Rugged housing
- High IP protection class IP65
- Diaphragm valve for pressure compensation

ACCESSORIES

	ARTICLE NO.	PRODUCT DESCRIPTION
	A0002055 	Leather holster
	ET002055 	Sealing kit
	ET002056 	Replacement lens
	ET002059 	Ring switch

Lite-Ex[®] PL 30e

LED FLASHLIGHT FOR ZONE 0 / 20

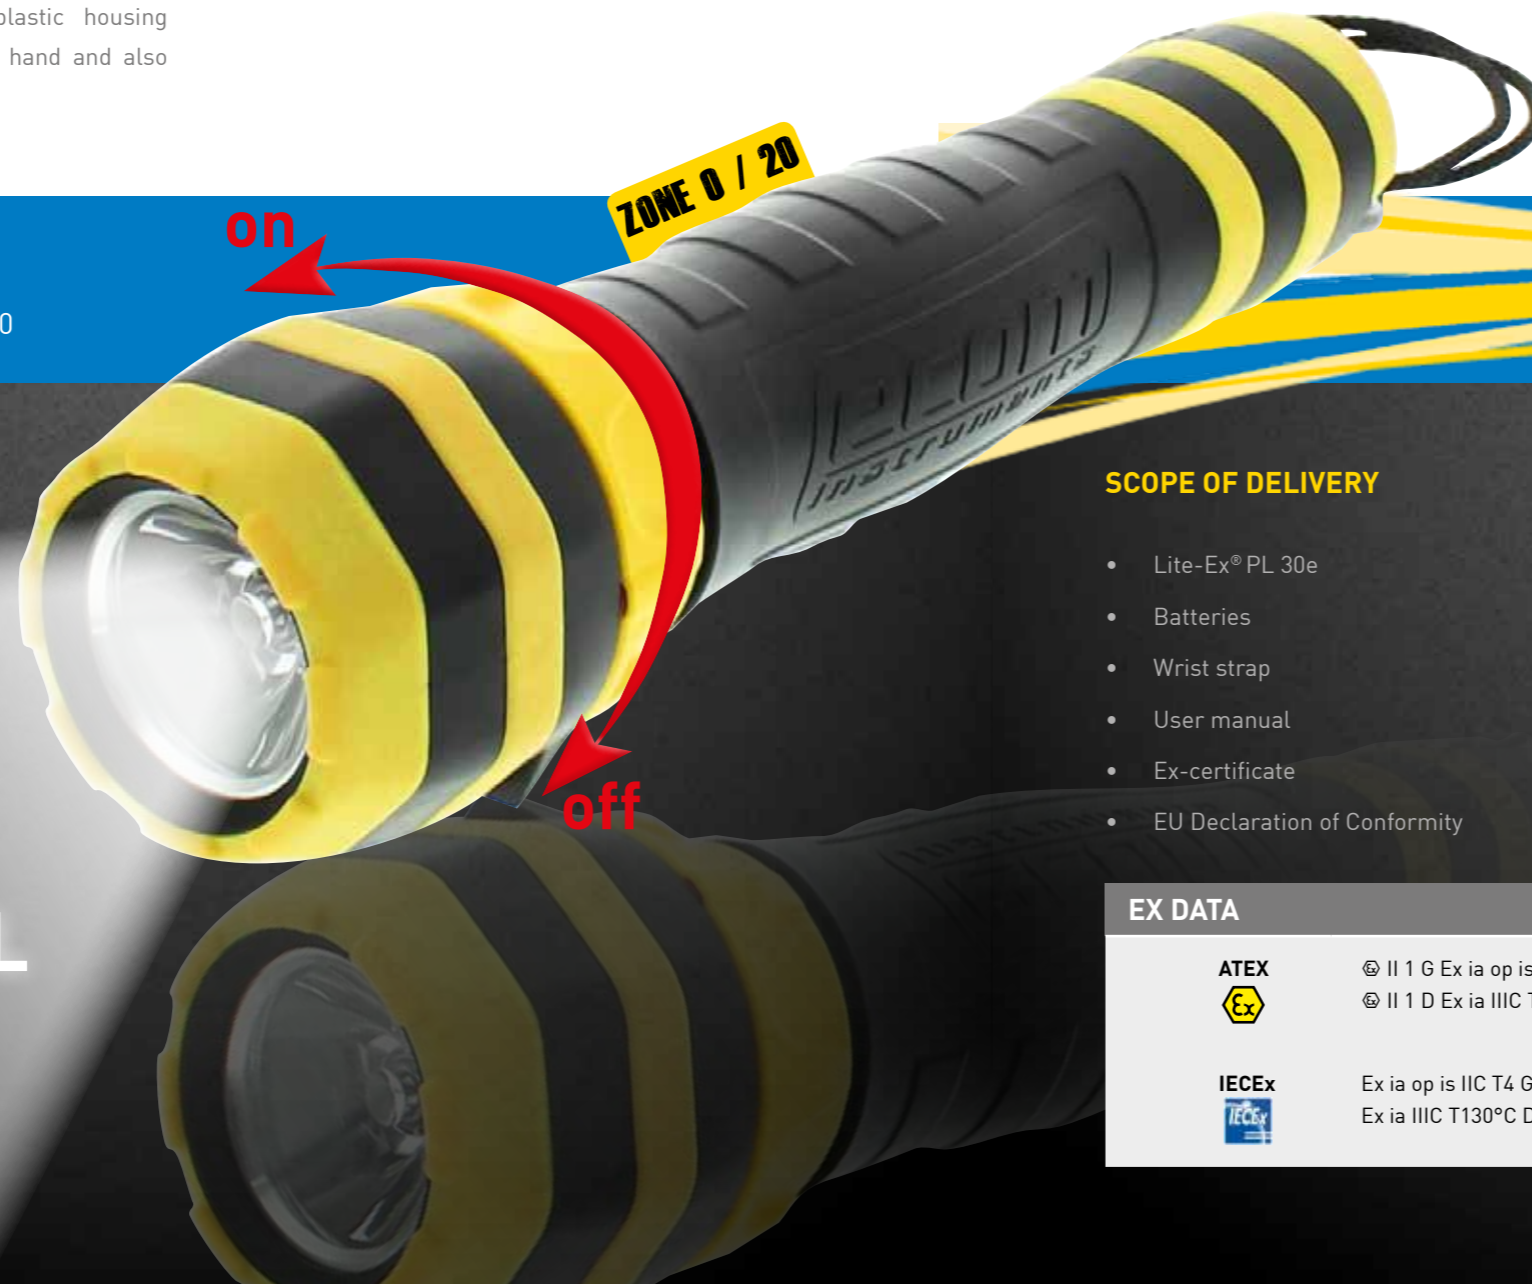



**+ 51 %
ADDITIONAL
LUMEN**

SCOPE OF DELIVERY

- Lite-Ex[®] PL 30e
- Batteries
- Wrist strap
- User manual
- Ex-certificate
- EU Declaration of Conformity

EX DATA

ATEX	⊕ II 1 G Ex ia op is IIC T4 Ga IP65
	⊕ II 1 D Ex ia IIIC T130 °C Da IP65
IECEX	Ex ia op is IIC T4 Ga IP65
	Ex ia IIIC T130°C Da IP65

TECHNICAL DATA

Ambient temperature	-20 °C ... +50 °C
Storage temperature	-30 °C ... + 60 °C (without batteries)
Power supply	3x LR 14 (type-tested)
Light source	1x 3 Watt LED
Luminosity	5,000 lux (at a distance of 1 m)
Luminous flux	204 lumens
Operating time	> 48 hrs (continuous operation)
Dimensions	approx. 220 x 55 / 42 mm (L x Ø)
Weight	approx. 530 g
IP protection class	IP65
ESD protection	Anti-static housing
CE-designation	CE 0102

EMEA

Germany (Headquarters) ¹

ecom instruments GmbH
Industriestraße 2
97959 Assamstadt
Phone +49 62 94 42 24-0
Fax +49 62 94 42 24-100
sales@ecom-ex.com
¹ also covering Austria

ecom Benelux ²

ecom instruments BV
Watertoren 45c
3247 CL Dirksland, Netherlands
Phone +31 1 87 60 59 16
Fax +31 1 87 60 33 47
info.nl@ecom-ex.com
² also covering Belgium and Luxembourg

France ³

Pepperl+Fuchs EURL
Division Mobile Safety
4 rue Ettore Bugatti
67201 Eckbolsheim (France)
Phone +33.3.88 76 46 84
mobile-safety@fr.pepperl-fuchs.com
³ also covering Algeria, Egypt, Morocco

Italy

ecom instruments srl
Via Gandhi, 15 Galleria
20017 Rho (MI)
Phone +39 02 93 90 92 16
Fax +39 02 93 90 62 97
info.it@ecom-ex.com

Switzerland

Pepperl+Fuchs AG
Sägeweg 7
2557 Studen, Bern
Phone +41 32 374 76 76
Fax +41 32 374 76 78
info.ch@ecom-ex.com

Nordics

ecom instruments GmbH
Postbox 304
2970 Hørsholm
Denmark
Phone +45 28 252 575
info.nordics@ecom-ex.com

United Kingdom

ecom instruments ltd
A310, The Wilton Centre,
Redcar, TS10 4RF,
United Kingdom
Phone +44 1642 46 54 00
Fax +44 1642 46 54 02
info.uk@ecom-ex.com

Middle East

ecom instruments fze
P.O. Box 8918
Saif-Zone, Sharjah, UAE
Phone +971 6 5 57 34 30
Fax +971 6 5 57 34 31
info.uae@ecom-ex.com
⁴ also covering Tunisia and Libya

Americas

USA

ecom instruments Inc.
1779 Westborough Drive, Suite 102
Katy, Texas 77449
Phone +1 281 496 59 30
Fax +1 281 496 23 21
sales.us@ecom-ex.com

Asia

South East Asia

Pepperl+Fuchs Pte Ltd
15 Pioneer Turn
P+F GDC Building
Singapore 627577
Phone +65 6779 9078
info.sg@ecom-ex.com



Locate your nearest ecom partner on www.ecom-ex.com & www.pepperl-fuchs.com