




i3TOUCH P11 A new benchmark in meeting spaces.

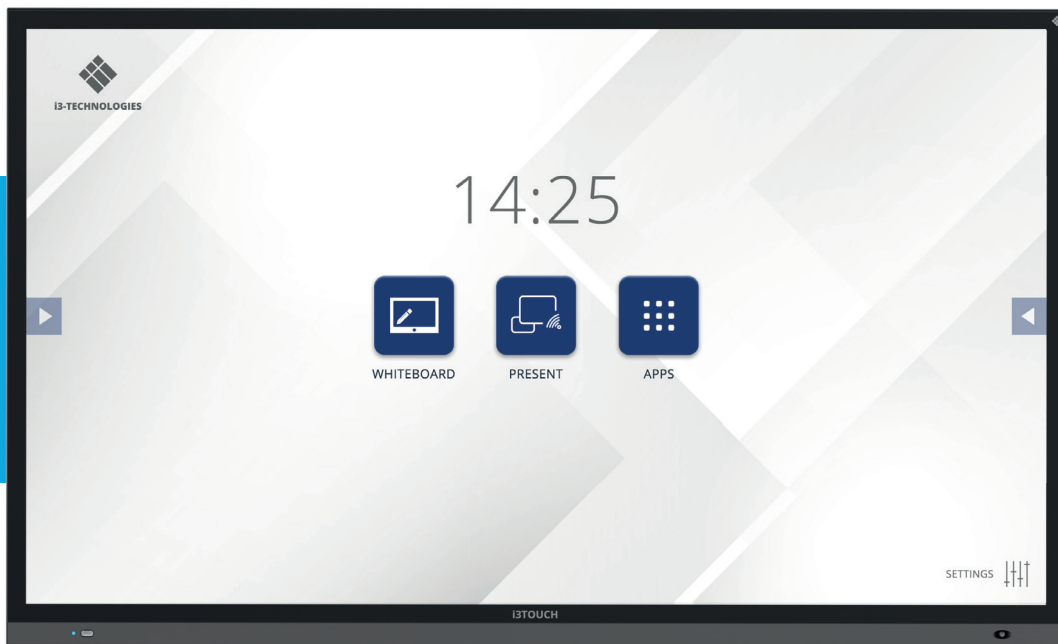

75", 86"

The i3TOUCH P11 sets a new benchmark in meeting spaces with its ability to combine the essentials for interactive meetings with a sleek, stylish design that feels very familiar.



Easy whiteboarding in i3NOTES

Instantly take notes with your finger or with the intelligent pens that support multi-colour writing for an intuitive writing experience. Save time and focus on your presentation, not the tools.

Pen with Windows Ink support

Stay focused on your audience when giving a presentation: use the active pen to jot down notes in your Power-Point slides or other MS tools.



Wireless presenting with i3ALLSYNC

Kick start your presentation with the i3ALLSYNC mirroring app. Don't waste time hunting for the right cable, resolution or driver. Present your content wirelessly from any device and enjoy the ability to manage your presentation on the i3TOUCH.

Premium touchscreen design

The capacitive touch technology creates a natural touch experience and a sleek, stylish design.

New UI with easy navigation

The redesigned interface enhances the look & feel of the touchscreen and makes navigating between apps even more intuitive.

Motion sensor

No need to worry about letting the touchscreen run for long periods of time. Thanks to the motion sensor it automatically turns on and off to save power.

PRODUCT INFORMATION

Model name	i3TOUCH P7511	i3TOUCH P8611
Product series	i3TOUCH Premium - Interactive Flat Panel Displays	

DISPLAY SPECIFICATIONS

Panel technology	Thin-Film-Transistor Liquid Crystal Display (TFT LCD)	
Panel active screen size	75 inch	86 inch
Display aspect ratio	16:9	
Display native resolution	3840 x 2160 pixels - 4K Ultra High Definition	
Brightness	350 cd/m ²	
Contrast ratio	1200:1	
Viewing angle	178° / 178°	
Colour depth	1.073 billion colors (10 bit)	
Response time (typ.)	6 ms	8 ms
Refresh rate	60 Hz (@ UHD)	
Pixel pitch	0.4324 x 0.4324 mm	0.4958 x 0.4958 mm
Supported orientation	Landscape	
Glass	4 mm Hardened Anti-Reflection Safety Glass	
Life time	50,000 hours	

CONNECTIVITY

Digital audio-video inputs	3x HDMI 2.0, 1x DisplayPort 1.2	
Digital audio-video output	1x HDMI 2.0	
Analogue audio-video input	1x VGA (DE-15 female) + audio jack (3.5 mm TRS connector)	
Analogue audio output	1x audio jack (3.5 mm TRS connector)	
Digital audio output	1x digital coax (RCA connector)	
USB data ports	1x USB 3.0, 2x USB 2.0	
Integrated PC slot	OPS-PC slot (JAE TX24 connector)	
Control input	1x COM DE-9 (RS-232C standard)	
Network	LAN: RJ-45 connector (100 Mbit/sec)	
	Wi-Fi: 2.4 / 5 GHz (IEEE 802.11 a/b/g/n/ac)	
	Bluetooth: 4.1	
Integrated loudspeakers	2x 15 Watt Speakers + Subwoofer	

OPERATIONAL FEATURES

Operating System	Android™ 7.1	
Architecture	CPU: 2x ARM CORTEX A72 and 4x ARM CORTEX A53	
	GPU: ARM MALI-T864	
	RAM: 2 GB	
	ROM: 16 GB	
Interactive touch	Projected Capacitive Touch recognition	
	Input Detection: 16 touch inputs	
	Touch Connection: 2x USB-B	
	Recognition: Active Stylus, Finger or passive capacitive stylus (size ≥ 5 mm)	
	Response time: < 10 ms	
	Accuracy: ± 1 mm	
Supported Compatibility	Windows, Android, MacOS X, Linux, Chrome OS	
Maximum operating hours	18 hours / day	

SOFTWARE FEATURES

i3NOTES	Whiteboarding application
i3ALLSYNC	Share your content wirelessly from any device by using the Windows app (min: Windows 7), the MAC OSX app (min OSX 10.10), AirPlay for iOS and the Android (Play Store, min. Android 5.0). Wireless touch function and audio transmission on Windows & OSX. Up to 64 devices can use the remote view simultaneously to follow the meeting.

ELECTRICAL PROPERTIES

Power voltage	100 ~ 240 Volt - 50/60 Hz	
Power consumption		
(standby)	< 0.5 Watt	
(normal operation)	175 Watt	
(maximum operation)	290 Watt	370 Watt
Extra energy saving features	Motion presence sensor	

ENVIRONMENTAL CONDITIONS

Operating temperature	0° C to 40° C
Operating humidity	20% to 80% RH non-condensing
Storage temperature	-20° C to 60° C
Storage humidity	10% to 90% RH non-condensing

PHYSICAL PROPERTIES

Product dimensions	1748 x 1026 x 95 mm (68.8" x 40.4" x 3.8")	1993 x 1165 x 95 mm (76.1" x 45.9" x 3.8")
Packaging Size	1888 x 1190 x 228 mm (74.4" x 46.9" x 9.0")	2128 x 1337 x 228 mm (83.8" x 52.7" x 9")
Net weight	65 kg	83 kg
Packaged weight	78 kg	100 kg
Mounting Pattern	600 x 400	800 x 600

Black front bezel, black back cabinet

Color

WARRANTY

Standard Warranty	3 years (Can be extended to 5 or 7 years.)
-------------------	--


ACCESSORIES

Included	User Manual
	Remote Control
	AC Power Supply Cord
	HDMI cable (3 meter)
	USB cable (3 meter)
	1x active stylus with Microsoft Ink support
Optional	Wall Mount
	i3FLOORSTAND series - Display stands and floorlifts
	i3COMPUTER OPS - Integration Computers
	i3ALLSYNC HDMI Transmitter (vsv0005930), i3ALLSYNC HDMI Storage


REGULATORY INFORMATION

Product Type Approval	CE, FCC
-----------------------	---------

i3TOUCH P7511

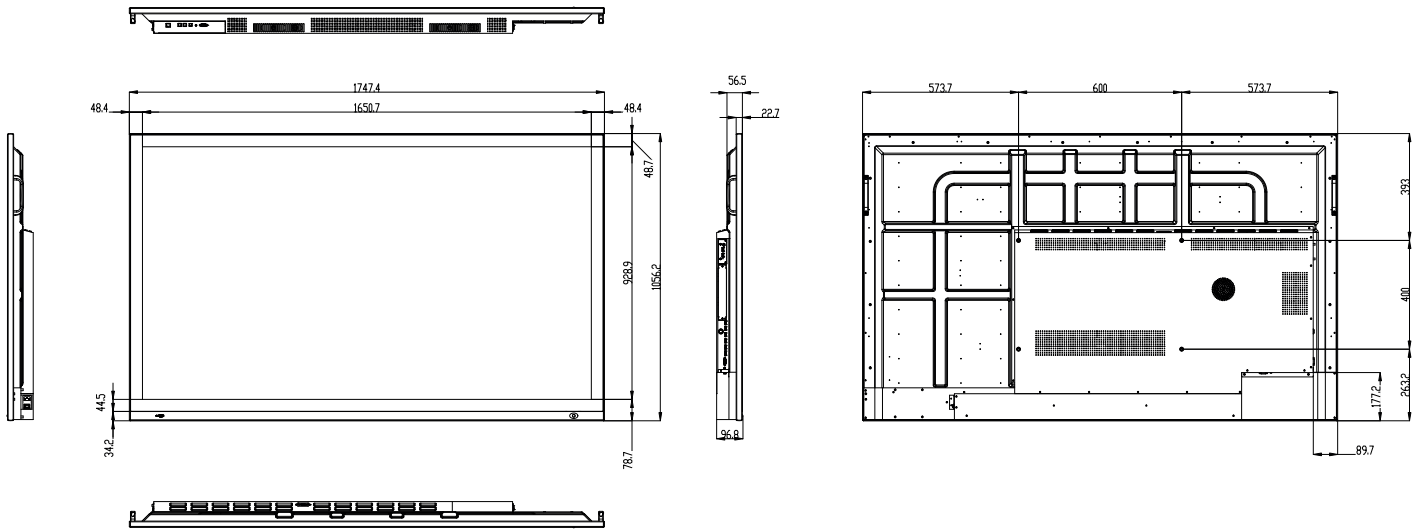

i3TOUCH P8611

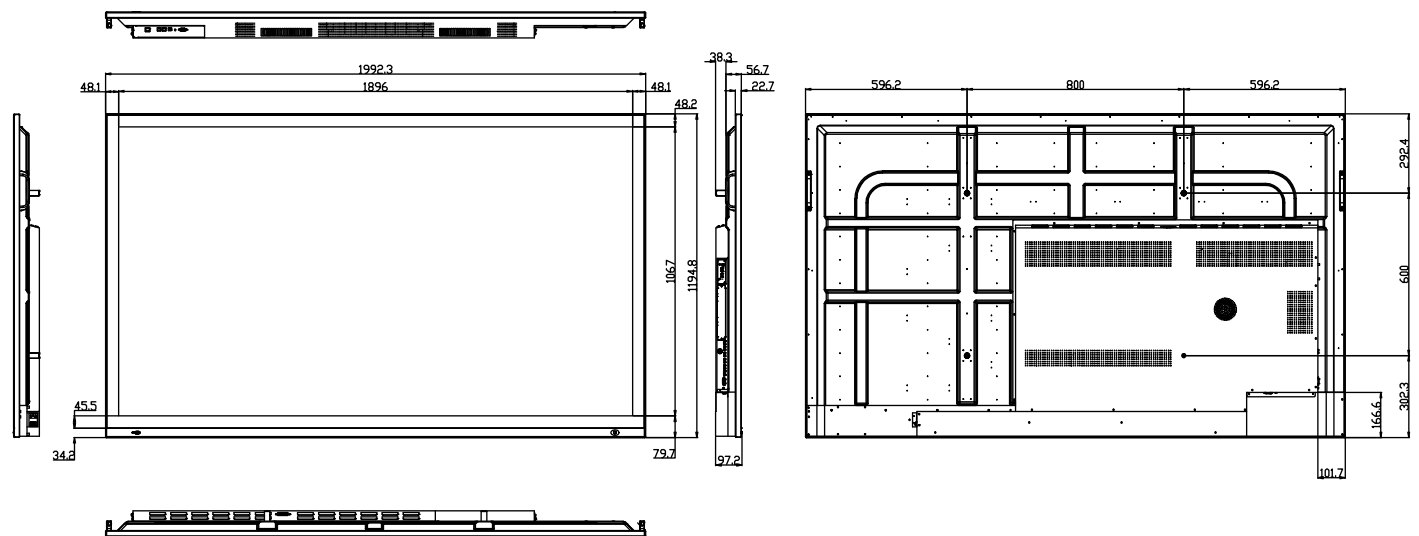

AUTHORISED DISTRIBUTOR