



i3HUDDLE 3.0 Just walk up & start working.



65"



WARRANTY

The affordable plug & play collaboration display for huddle meeting rooms. This intuitive all-in-one solution makes presentations, training & meetings simple. Just walk up & start working.

Top features



Video conferencing

Use any type of video conferencing software.



Present

Share your screen wirelessly With the i3ALLSYNC app or new i3ALLSYNC HDMI transmitter.



Home button

Return to the home screen at any moment. Enjoy intuitive and easy navigation.



Simple Notetaking

Open the easy to use white-boarding app to take notes and share immediately.



Pressure sensitive Active Pen included and compatible with Microsoft Ink.



Pro

Windows platform

Enjoy the ease of an integrated Windows computer. Take notes, access your files, surf on the web, share your screen, meet with a remote team, customize your home screen, and plan the next meeting.



Home button

Press the home button to return to the home screen at any moment. Enjoy intuitive and easy navigation.



Simple notetaking

Open the easy to use whiteboarding app to take notes and share immediately.



Tablet look and feel

Familiar gestures such as swiping, pinching and zooming all come naturally and intuitively on the touchscreen.




Capacitive sense

Enjoy extreme response speed thanks to capacitive sense technology which doesn't rely on pressure.



20 touch points

Work with multiple people on the screen. The multi-touch technology recognizes up to 20 touch points at the same time.



Integrated computer

The all-in-one meeting solution comes completely set up with an integrated computer.

Specifications

PRODUCT INFORMATION

Model name	i3HUDDLE H6530
Product series	i3HUDDLE Interactive Flat Panel Display
Product order code	VSV0005826

DISPLAY SPECIFICATIONS

Display technology	Liquid Crystal Display (LCD) with DirectLED lighting	
Panel active screen area	1428,5 x 803,5 mm active screen area	74.60" x 41.97"
Display aspect ratio	16:9 aspect ratio	
Display native resolution	3840 x 2160 pixels - 4K Ultra High definition	
Brightness	300 cd/m ²	
Contrast ratio	1200:1	
Viewing angle	178° / 178°	
Colour depth	1.073 billion colours (10 bit)	
Response time (typ.)	6 ms	
Refresh rate	60 Hz (@ UHD)	
Pixel pitch	0,372 x 0,372 mm	
Supported orientation	Landscape	
Glass	3 mm Hardened Anti-Reflection Safety Glass	
Life time	30,000 hours	

SOFTWARE FEATURES

i3HUDDLE Interface Software	Individualization of the home screen: meeting room agenda, favorite videoconferencing apps, weather forecast, visible inputs & customization, logo customization, bookmarks, personalized user accounts.
i3NOTES+ Whiteboarding application	Make annotations and share immediately with every device.
i3OVERLAY Screen annotation application	Write on top of every image/app/site & save your content in i3NOTES+
i3ALLSYNC Wireless video cast application	Share your content wirelessly from any device by using the Windows app (min: Windows 7), the MAC OSX app (min OSX 10.10), AirPlay for iOS and the Android (Play Store, min. Android 5.0). Wireless touch function and audio transmission on Windows & OSX. Up to 64 devices can use the remote view simultaneously to follow the meeting.
i3CAMPFIRE	Start your collaborative session as a host, or instantly a hosted session. Open virtual meeting rooms and collaborate instantly with your remote colleagues on the same document. Intuitive pen recognition. Join each session instantly with your own device by scanning the QR code.
Active pen	Automatically recognized in i3NOTES+, i3CAMPFIRE, Microsoft Office 365 & other Microsoft Ink supported software.


CONNECTIVITY

input	2x HDMI 2.0
	1x VGA (DE-15 male) + 3.5 mm audio jack (TRS connector)
	1x AV 3.5 mm jack (TRRS connector)
	1x COM DE-9 (RS-232 standard)
output	1x HDMI 1.0
	1x Coaxial S/PDIF (RCA connector)
audio	2x 12 Watt speakers

INTEGRATED PC

Windows 10 Pro
Intel i7-6700, 8 GB RAM, 256 GB SSD
Microphone, USB 3.0 (6x)
Audio, HDMI, VGA
RJ-45 (1 Gbit/sec), Wi-Fi 802.11ac (2.4 GHz/5 GHz), Bluetooth 4.2
Kensington lock slot

OPERATIONAL FEATURES

Interactive touch	Technology: C-Sense Capacitive Touch recognition
	Input Detection: 20 touch inputs
	Touch Connection: 1x USB-B
	Recognition: Finger or stylus
	Response time: < 25 ms
	Accuracy: ± 1 mm
Supported compatibility	Windows, Android, Macintosh OSX, Linux, ChromeOS
Maximum operating hours	18 hours / day
Energy saving motion sensor 	Standby function when no motion is detected in the room
Easy navigation	Physical home button

ELECTRICAL PROPERTIES

Power voltage	100 ~ 240 Volt - 50/60 Hz
Power consumption	160 Watt (consumption of the display)


ENVIRONMENTAL CONDITIONS

Operating temperature	0° C to 40° C
Operating humidity	10% to 90% RH non-condensing
Storage temperature	-20° C to 40° C
Storage humidity	10% to 90% RH non-condensing
Max. operational altitude	5,000 meters

PHYSICAL PROPERTIES

Product dimensions	1503 x 919 x 94 mm (59,18" x 36,19" x 3,71")
Net product weight	49 kg (108lb)
Packaging size	1683 x 1048 x 216 mm (66,26" x 41,26" x 8,51")
Packaged weight	60 kg (132lb)
Mounting pattern	600 x 400
Color	Black

Technical drawing

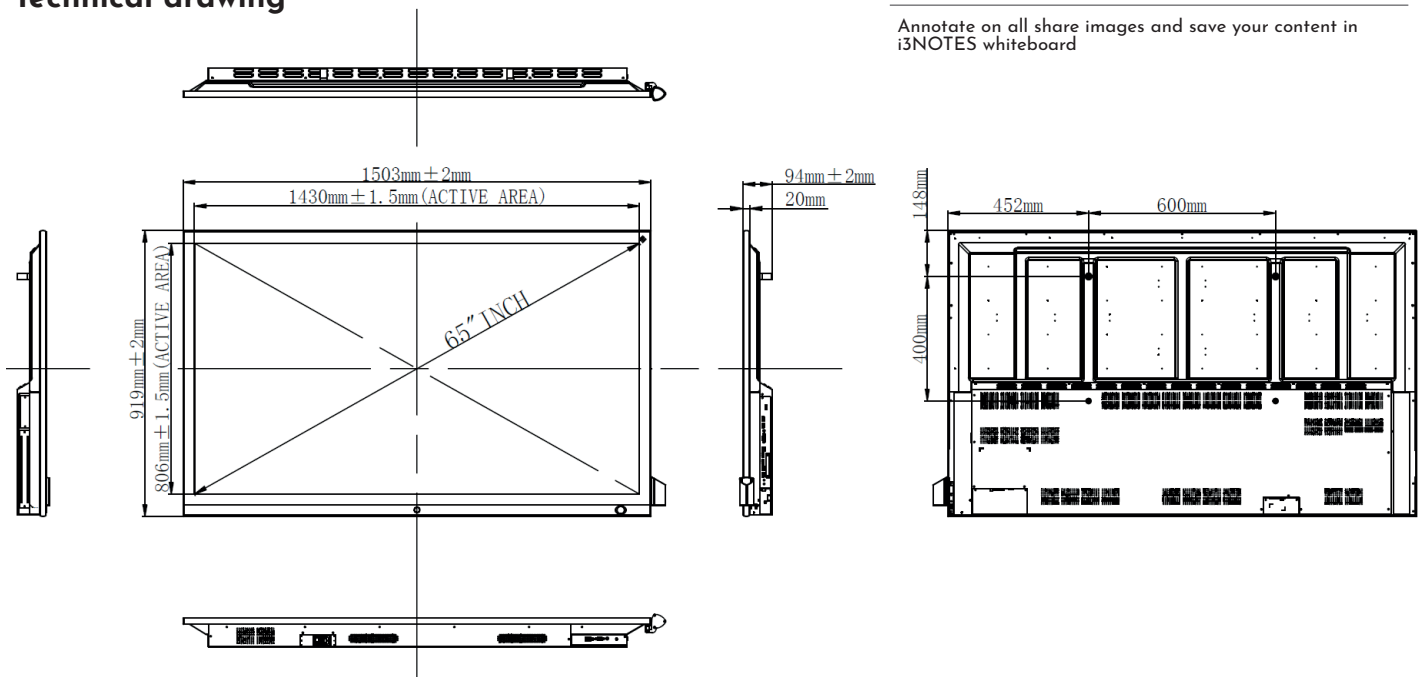

WARRANTY

Standard warranty	3 years
Extended warranty	5 years

ACCESSORIES

Included	User manual
	Power supply cord
	HDMI cable (3 meter) + USB cable (5 meter)
	2x active styli + Pen holder
	Wall mount
Optional	i3FLOORSTAND - Display stands and floorlifts
	i3ALLSYNC HDMI Transmitter(vsv005930), i3ALLSYNC HDMI Storage

REGULATORY INFORMATION

Product type approval	CE, FCC
-----------------------	---------

i3ALLSYNC REQUIREMENTS

	Laptops & Tablet PCs	iPads, iPhones & iPods	Android Tablets & Phones
Operating System	Windows 7 or newer OSX 10.10 or newer	iOS version 7.0 or newer	Android 5.0 or newer
Minimum Required	Intel Core i3 4th generation, 4 GB RAM	iPad 3 / iPhone 5 or newer	Phones/Tablets with Android 5.0 or newer

Network Requirements	When i3ALLSYNC is deployed into the existing network, the host PC and the clients require wired or wireless network connection with a minimum bandwidth of 20 Mbps and peer-to-peer sharing enabled. When running HD content, increase the minimum bandwidth to 50 Mbps. Like any network application, the overall performance is dependent on available bandwidth. Internet access is also required to update the i3ALLSYNC receiver app.
Functionality	Screen mirroring from any device (with minimum device requirements)
	FHD resolution
	Wireless touch function on Windows & MAC OS. Up to 64 devices can use the remote view simultaneously to follow the meeting.
	App available in the Apple store, Play store and on i3-allsync.com. (by the end of May 2018)
	Annotate on all share images and save your content in i3NOTES whiteboard