

## Technical Data Sheet

### Battery pack for the simalube IMPULSE connect





The battery pack has been specifically designed for the simalube IMPULSE connect. It is a unit of four batteries which together provide the energy for the simalube IMPULSE connect. The function display and the electric motor are thereby supplied with power.

One battery pack is sufficient, regardless of the lubricator size or the time setting, to empty a simalube dispenser on a simalube IMPULSE connect. If the simalube is changed, a new battery pack must be fitted.

#### Technical data

Product number	230.5000
Designation IEC	LR6
System	Zn-MnO <sub>2</sub> (alkaline)
Nominal voltage	4x 1.5 V = 6 V
Capacitance C	2,3 Ah
Temperature range	0 – 55°C
Weight	100 g
Warranty & period of use	3 years from the production date
Storage	Recommended at +20 °C (+/- 5 °C) Protect against sunlight and store in a dry place (<65% humidity)
Packaging unit	1

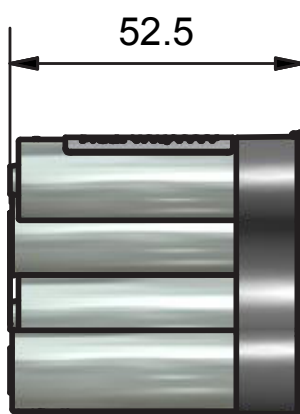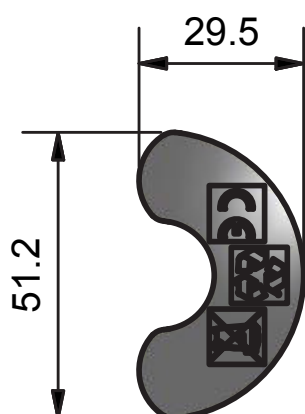

Do not recharge the battery pack but recycle the batteries.